

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS




IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**






Thermoforming machine with linear recirculation of sheet holding frames

Patent number: EP0920975
Publication date: 1999-06-09
Inventor: CHUN VICTOR L (US); ARENDS ALBERT W (US); KARKLIN ROLAND (US)
Applicant: KVAERNER U S INC (US)
Classification:
- international: B29C51/26; B29C51/16
- european: B29C51/26B2, B29C51/26
Application number: EP19980122307 19981124
Priority number(s): US19970986977 19971208

Also published as:

 US5980231 (A1)
 EP0920975 (A3)
 EP0920975 (B1)

Cited documents:

 US5167969
 EP0200860
 US4746005
 US4744848
 DE4036485

Abstract of EP0920975

A thermoforming machine utilizes two clamping frames (A,B) to advance cut sheets through heating and forming stations (14,16), with the clamping frames (A,B) returned via an overhead path above the oven (28,30) in the heating station (14). Pneumatic cylinders arranged about the inner perimeter of the frames (A,B) are operated to grip the sheet and release the sheets, which are pressurized and released via fluid connections established when the frames (A,B) are lifted from a transfer bar structure at the loading and forming stations (12,16). The clamping frames (A,B) have pivoted end sections which are engaged by extendible gear posts at the forming station to bend the clamped sheet into greater conformity with the tooling shape prior to forming.

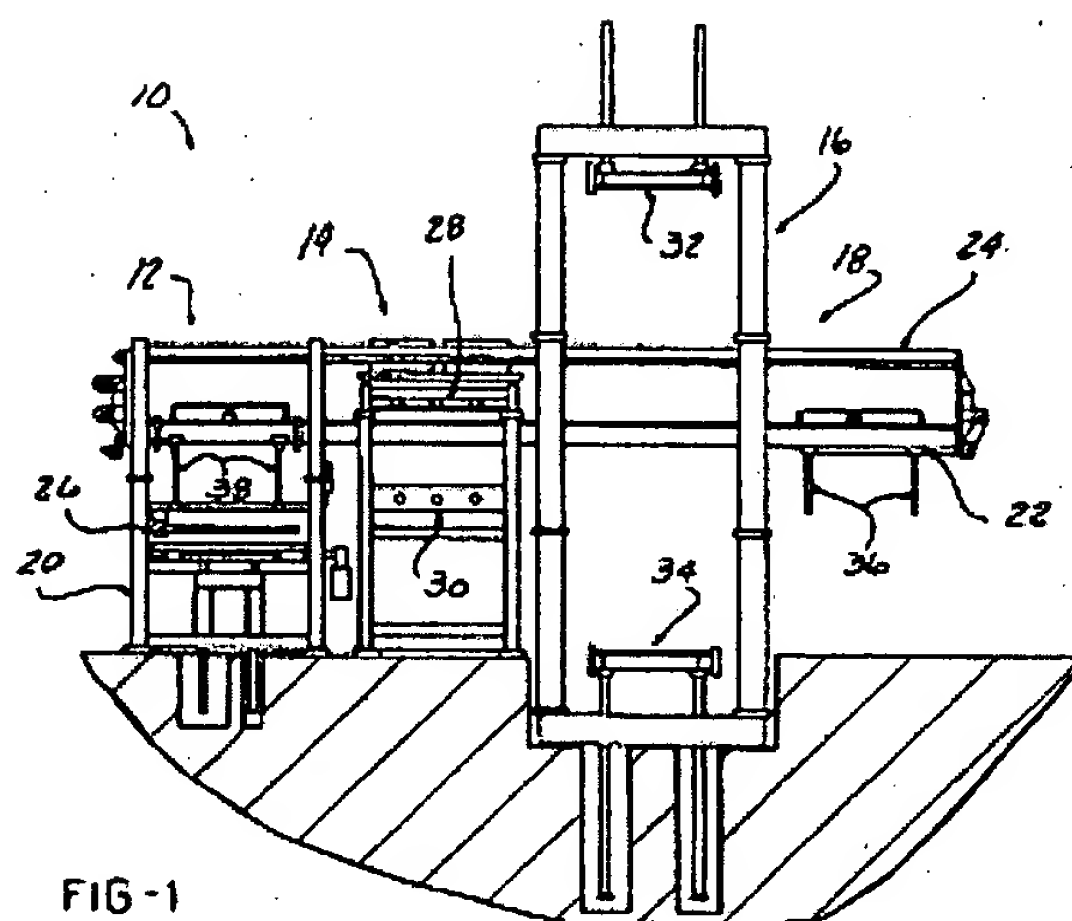


FIG -1

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 920 975 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
09.06.1999 Bulletin 1999/23

(51) Int. Cl.⁶: B29C 51/26, B29C 51/16

(21) Application number: 98122307.6

(22) Date of filing: 24.11.1998

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 08.12.1997 US 986977

(71) Applicant: Kvaerner U.S., Inc.
Beaverton, Michigan 48612 (US)

(72) Inventors:

- Arends, Albert W.
Gladwin, Michigan 48624 (US)
- Chun, Victor L.
Midland, Michigan 48642 (US)
- Karklin, Roland
Beaverton, Michigan 48612 (US)

(74) Representative:

Schaumburg, Thoenes & Thurn
Postfach 86 07 48
81634 München (DE)

(54) Thermoforming machine with linear recirculation of sheet holding frames

(57) A thermoforming machine utilizes two clamping frames (A,B) to advance cut sheets through heating and forming stations (14,16), with the clamping frames (A,B) returned via an overhead path above the oven (28,30) in the heating station (14). Pneumatic cylinders arranged about the inner perimeter of the frames (A,B) are operated to grip the sheet and release the sheets, which are pressurized and released via fluid connections estab-

lished when the frames (A,B) are lifted from a transfer bar structure at the loading and forming stations (12,16). The clamping frames (A,B) have pivoted end sections which are engaged by extendible gear posts at the forming station to bend the clamped sheet into greater conformity with the tooling shape prior to forming.

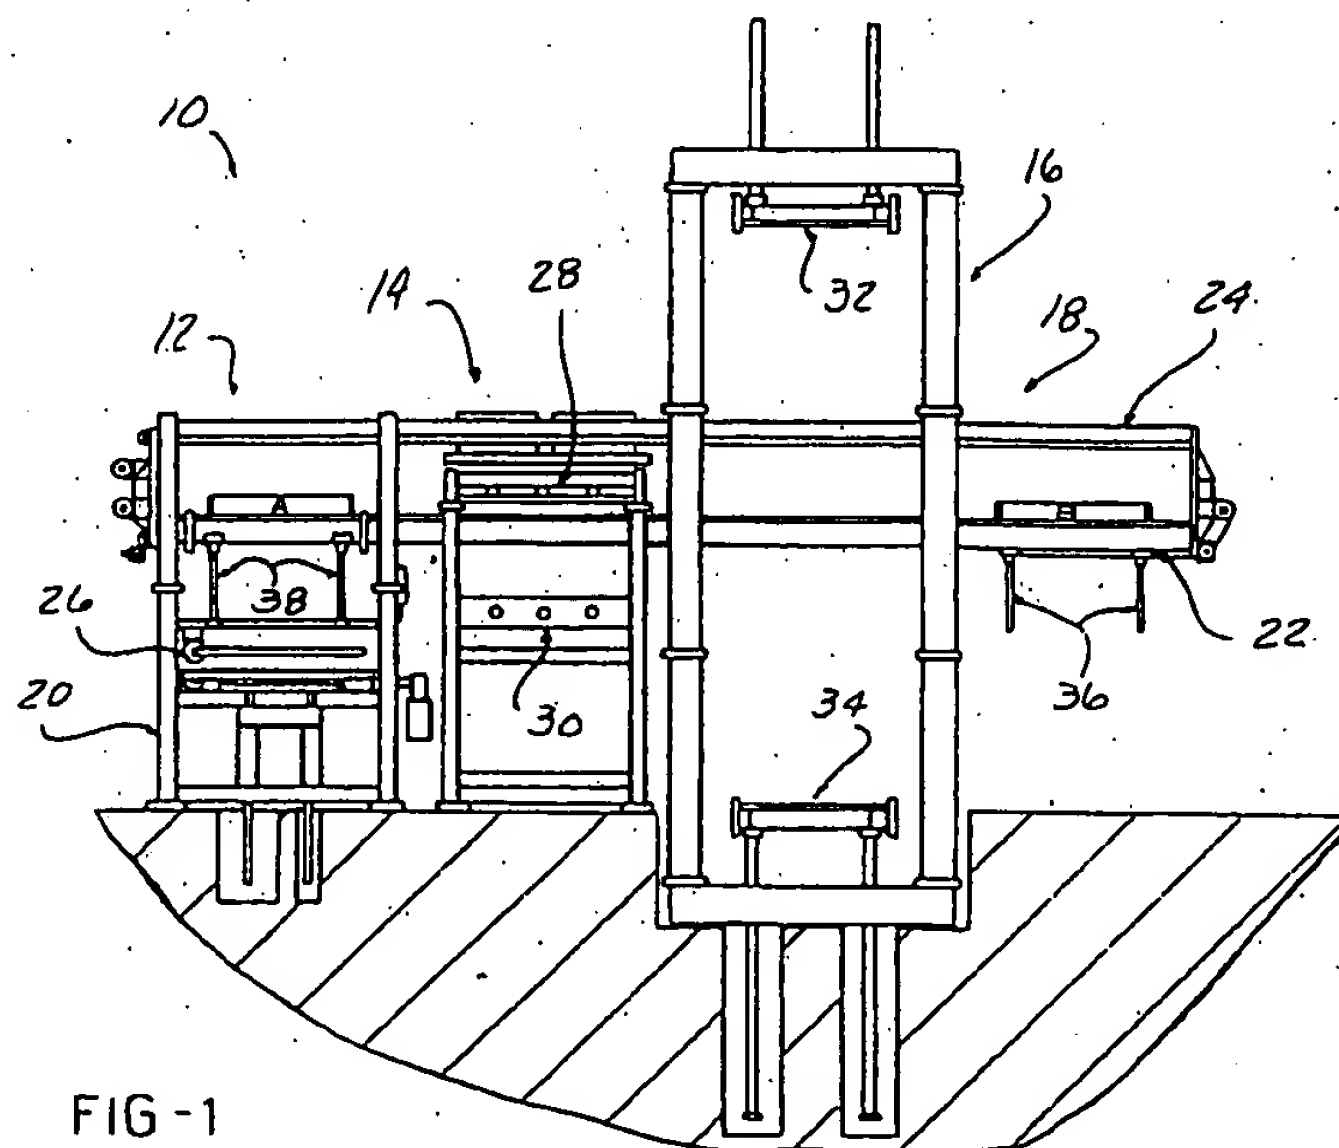


FIG -1

Description

BACKGROUND OF THE INVENTION

[0001] This invention concerns thermoforming machines of the type in which thermoplastic sheets are first heated in an oven and then transferred to a forming station where a heated sheet is drawn onto tooling forms by vacuum and/or air pressure to be formed into an article.

[0002] In some instances, a clamping frame is used to hold thinner sheets which would otherwise become too weak when heated to be transferred between stations in the machine.

[0003] When using a clamping frame, a continuous in-line process is not possible as the clamping frames must be returned to the first station and reloaded with a cut sheet.

[0004] Rotary transfer thermoforming machines are known such as described in U. S. Patent 3,925,140 issued on December 9, 1975, which use continuous rotation of a carrier member to carry the frames through the station and to return the frames to a load/unload station after successive rotation through the heating and forming stations.

[0005] For very large articles, rotary transfer thermoforming machines occupy excessive plant floor space.

[0006] An in-line shuttle transfer has also been used, but this either is too slow if a single clamping frame is used, or requires two molding stations on either side of an oven.

[0007] Another problem is encountered in thermoforming parts with substantially angled deep portions, as excessive stretching of the material would occur if the sheet is simply formed onto the tool shape.

[0008] Draping techniques are sometimes employed for closed shapes forming dished containers, with vacuum (or air pressure) causing a pronounced sagging of the sheet material preparatory to the forming step. Such technique is not useable with a nonclosed shape or with angled ends connected with a flat center section.

[0009] U. S. Patent 4,744,848 issued on May 17, 1988, describes a frame with hinged side portions which floats to allow forming with minimal stretching. This arrangement relies on engagement with a male and female mold to cause hinging of the frame ends which in turn bends the sheets into closer conformity with the mold contours prior to forming. See also U. S. Patent 3,574,807 issued on April 13, 1971, which describes a frame hinged in the middle to form an angled article shape.

[0010] These patents do not disclose an adaptation of a hinged clamping frame to automated thermoforming apparatus.

[0011] Accordingly, it is an object of the present invention to provide a linear transfer system for a plurality of clamping frames used in a thermoforming apparatus to hold sheets during heating and forming steps.

[0012] The system is adapted to article sizes too large for practical application to rotary machines.

[0013] It is another object to provide a frame having a section pivot capability for sharply angled elongated parts which is adapted to an automated system and which does not require engagement with a male and female mold contour to be actuated.

SUMMARY OF THE INVENTION

[0014] These objects and others which will become apparent upon a reading of the following specification and claims are accomplished by a linear transfer system for a set of two clamping frames.

[0015] The clamping frames are each successively moved through a load station, heating or oven station, a forming station, and an elevator/return station by a reciprocated transfer bar structure. Each clamping frame is slightly elevated in the heating, forming, and elevator/return stations to allow retraction of the transfer bar structure to receive a trailing clamping frame for separate advance.

[0016] Each clamping frame is elevated to a height above the heating station oven, and transferred back over the top of the oven, to a position above the loading station. After partial lowering, a cut sheet is loaded into the frame, which is thereafter lowered onto the transfer bar structure.

[0017] Each clamping frame has pivoted end sections which are each engaged by pairs of extensible gear posts when each frame is in the forming station, the posts each advancing a cam roller into engagement with one of a pair of side channels on either side of the frame by operation of a drive system. The gear posts are retracted to be disengaged with the side channels to allow advance of the clamping frame to the elevator/return station.

[0018] An array of pneumatic cylinders and a series of clamping bars are arranged around the inner perimeter of the clamping frame. The cylinders are operated to retract or advance the clamping bars by application of pneumatic pressure communicated through manifold bars engaging one of the lift plates protruding from each end of the clamping frame.

[0019] The manifold plates are mounted on elevating cylinders located at the load and form stations so as to establish a fluid connection to the cylinders when the clamping frame is raised off the transfer bars.

[0020] In the load station a cut sheet is raised within the clamping frame, and the cylinders operated to clamp the cut sheet in the clamping frame.

[0021] In the frame station, the cylinders are retracted as the sheet is formed to release the sheet and allow removal of the formed article.

[0022] This invention allows a very large sharply angled article to be efficiently formed in an automated system which requires relatively less floor space than a comparable rotary machine.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023]

Figure 1 is a side elevational view of a thermoforming machine according to the invention.

Figures 2A through 2G are a diagrammatic view depicting the linear movement of two clamping frames through the machine of Figure 1.

Figure 3 is a side elevational view of the lower clamping frame transfer system.

Figure 4A is a view of the section 4-4 in Figure 3 with a fragmentary portion of a clamping frame resting on the transfer bar structure.

Figure 4B is the same section as Figure 4A but showing the clamping frame raised off the transfer bars.

Figure 5 is a view of section 5-5 in Figure 3.

Figure 6 is a side elevational view of the upper clamping frame transfer system.

Figure 7 is a view of the section 7-7 in Figure 6 with a portion of a captioned clamping frame shown in phantom lines.

Figure 8 is a diagrammatic view of the belt drive for the upper transfer system.

Figure 9 is a diagrammatic view of the belt drive for the lower transfer system.

Figure 10 is a plan view of a clamping frame.

Figure 11 is a view of section 11-11 in Figure 10.

Figure 12 is an end elevational view of the clamping frame pivoting system.

Figure 13 is a plane view of the clamping frame pivoting system.

Figure 14 is a side elevational view of the clamping frame pivoting system.

Figure 15 is an enlarged end view of one of the gear post mechanisms used in the pivoting system shown in Figures 12 through 14.

Figure 16 is a layout view showing the operation of one side of the clamping frame pivoting mechanism.

Figure 17 is a diagrammatic view of the manifold fluid connection to the clamping frame pneumatic cylinders.

Figures 18A and 18B are diagrammatic views depicting the cutting and loading of a sheet into a clamping frame.

Figures 19-24 are diagrammatic views of successive conditions of an alternate form of the invention.

DETAILED DESCRIPTION

[0024] In the following detailed description, certain specific terminology will be employed for the sake of clarity and a particular embodiment described in accordance with the requirements of 35 USC 112, but it is to be understood that the same is not intended to be limiting and should not be so construed inasmuch as the

invention is capable of taking many forms and variations within the scope of the appended claims.

[0025] Referring to Figure 1, a thermoforming machine 10 according to the present invention is shown.

[0026] The machine 10 includes a loading/return station 12, a heating station 14, a forming station 16 (shown without any tooling), and an elevating/return station 18. The machine components are supported on a machine framework 20.

[0027] Lower transfer system support rails 22 extend through the stations 12 through 18 and return or upper transfer support rails 24 extend back above and along the stations 12 through 18 (although extending below the upper platen forming station 16).

[0028] The loading/return station 12 includes a sheet cut off and loading apparatus 26 for loading a sheet to be formed into a clamping frame. The basic arrangement of this equipment will be described hereinafter.

[0029] A pair of clamping frames A, B, are separately and successively advanced from the loading station 12 through stations 14 through 18 on a transfer bar structure 40 (Figure 2) the lower rails 22, and hence returned via the upper rails 24.

[0030] Upper and lower heating panels 28, 30 forming an oven are disposed in the heating station 14, together with a lower shield, the lower shield and/or oven moveable to clear a sagging heated sheet. Such heating ovens and shields are well known and do not form a part of the present invention and hence are not themselves described in detail herein.

[0031] The forming station 16 includes upper and lower platens 32, 34 for receiving tooling for forming the sheet into an article and unloading the formed article. Since such tooling and article handling apparatus also well known, and do not themselves form a part of the invention, further details will not be set forth herein, except in connection with the pivoting of sections of the clamping frames to facilitate the forming process, as will be described hereinafter.

[0032] The elevating/return station 18 has an elevator mechanism which comprises a set of four gear posts 36 driven simultaneously to raise a clamping frame A or B from the lower rails 22 to the upper rails 24 for return transfer to station 12. A lowering mechanism also including a set of gear posts 38 are driven to lower the returned clamping frame A or B released from a transfer bar structure 41 on the upper rails 24 (Figure 2) to a loading position and thereafter onto the lower rails 22 to be ready for another cycle.

[0033] Figures 2A through 2G diagrammatically depict the basic machine cycles and movement of the frames A and B through the machine.

[0034] In Figure 2A, clamping frame A rests on a transfer bar structure 40, and clamping frame B is raised out of engagement with the transfer bar structure 40 in station 16. Lower transfer drive 42 is activated to advance clamping frame A from station 12 to station 14, where it is lifted clear of the transfer bar structure 40, as

indicated in Figure 2B.

[0035] The transfer bar structure 40 is then retracted as shown in Figure 2C and the B frame is lowered thereunto and then advanced to the return station (Figure 2D after removal of the formed part).

[0036] The elevator mechanism 36 lifts the B frame off the advanced transfer bar structure 40 upwardly to an overhead upper transfer bar 41 driven by upper transfer drive 44. The B frame is captured by activation of gripper mechanisms on the upper transfer bar structure 41 preparatory to a return transfer.

[0037] In the meantime, the lower transfer bar structure 40 has returned to its retracted position to be positioned to receive the A frame lowered from the heating station 14 onto its middle section (Figure 2E). Upon the next forward motion of the transfer bar structure 40, the A clamping frame is advanced to the forming station 16 and elevated (Figure 2F), while the upper transfer bar structure 41 is driven back to a point positioning the B frame over the load station 12.

[0038] The lowering mechanism 38 lowers the B frame when released from the upper transfer bar structure 41 to a loading position whereat a cut sheet is loaded thereinto.

[0039] The lower transfer bar structure 40 in the meantime is retracted to allow the loaded B frame to be lowered onto the transfer bar structure 40 to be ready for another cycle.

[0040] The transfer bar structure 40 spans three stations and is reciprocated the distance between the stations to enable step by step incremental successive advance of each clamping frame A and B through the stations 12 through 18.

[0041] Figures 3 through 5 show further details of the lower transfer system including lower rails 22 and a transfer bar structure 40 mounted for guided movement on the rails 22 by way bearings 46 (right side only shown in Figures 4A, 4B and 5). The rails 22 are supported on the machine fixed framework including support stanchions 48 spaced along the length of the rails 22.

[0042] The length of the transfer bar structure 40 corresponds to three of the stations 12 through 18, and sets of spaced locator pins 50A, 50B, 50C are disposed at intervals along the length of the transfer bar structure 40 corresponding to the station spacing. The set of pins 50A, 50B, 50C may be raised and lowered by corresponding power cylinders 52 so as to be received or withdrawn from holes 54 in the bottom of the clamping frames A or B.

[0043] When raised, the pins 50A, 50B, 50C secure the clamping frame A or B in position as the transfer bar structure is advanced.

[0044] The clamping frames A or B are raised out of contact with the transfer bar structure 40 when advanced into each station 14, 16, 18 (Figure 4B) to allow retraction.

[0045] In stations 14 and 16, this raising is accom-

plished by power cylinders 56 each having an operating rod 58 to which is attached a bar 60 carrying tapered plugs 62 matched to openings in lift plates 64 welded to either end of the clamping frames A or B.

[0046] The clamping frames A or B are raised only a short distance in stations 14, 16, i.e., one quarter inch, just sufficient to allow return of the transfer bar structure 40 after retraction of pins 50A, 50B, 50C.

[0047] At station 18, the lifting is carried out by the elevator mechanism 36.

[0048] Figure 5 shows one of the four gear posts 66, connected in pairs, with bars 68 welded to the ends to prevent turning and to ensure equal stroking when gear 70 is driven to raise the posts 66

[0049] by a drive system 72. A similar arrangement is formed in the lowering mechanism 38 at station 12.

[0050] Figures 6 and 7 show the upper or return transfer system including rails 24 and upper transfer bar structure 41, which carries grippers 74 adapted to engage lift plates 64 of the clamping frames A, B to capture the clamping frames A, B. Downwardly driven locating pins 76 engage holes in the top of the clamping frame A, B.

[0051] Both upper and lower transfer bar structures 40, 41 are driven in either direction by belt pairs 78, 80 passed around sheaves 82, 84 (Figures 8, 9) and clamped to cross bars 86, 88. Electric motors (not shown) are used to power the sheaves 82, 84 via drive shafts (not shown) in a conventional manner.

[0052] Figure 10 shows one of the two identical clamping frames A, B which consists of a rectangular open framework 94 formed by lengths of aluminum extrusions 90 connected together at their ends.

[0053] U-shaped pieces 92 have legs 96 pivoted at 98 to the inside of each end of the rectangular framework 94.

[0054] Arrayed around the inside perimeter of the clamping frames A, B are a series of pneumatic sheet clamping cylinder mechanisms 100, arranged in parts to move pairs of clamping bars 102, 104 (Figure 11) together as a part to grip or release a rectangular sheet positioned within the rectangular space defined by the clamping cylinder mechanisms.

[0055] The left end plates 64A have ports connected to fittings for establishing a fluid connection to tubing 116 and manifold plates 106 to actuate or release the pneumatic cylinders 100.

[0056] The pairs of cylinders 100 are mounted on opposite sides of posts 108, and drive over center linkages 112 associated with respective bars 102, 104.

[0057] The bars 102, 104 have complementary inter-fitting edges which engage the plastic sheet edge 110 when brought together.

[0058] The pivoted sections 92 of the clamping frames A, B are adapted to be swung up in the forming section.

[0059] This is accomplished by pivot actuation mechanisms 118 each comprised of pairs of inclined gear posts 120 arranged on either side of the clamping frame

A or B (Figures 12-16). The gear posts 120 slide within guide tubes 122 and have a cam roller 124 at their upper end.

[0060] One side of each gear post 120 has a gear rack formed along its length engaged by a drive gear 126 to be extendible upwardly and retracted thereafter.

[0061] A single motor-gear box 128 drives all of the drive gears 126. A drive belt 130 recirculates around a drive pulley 132 driven by the motor gear box 128 which in turn circulates around an adjustable tensioner idler 134 and a pulley 136 on a cross shaft 138 fixed to opposite drive gears 126.

[0062] A drive shaft 140 transfers the drive to the opposite right-hand activation mechanism 118.

[0063] A connecting bar 142 joins each pair of gear posts 120 together to prevent rotation and ensure joint travel together.

[0064] The cam rollers 24 enter one end of guide channels 144 on each side of each end of the clamping frames A, B when the gear posts 120 are extended.

[0065] Continued travel causes the pivoted section 92 to swing up, bending the sheet portions clamped therein.

[0066] The sheet is thus bent into much closer conformity with the male tool T preparatory to the vacuum stretching onto the tool T as seen in Figure 16, greatly reducing the stretching of the sheet material.

[0067] The gear posts 120 can then be retracted, releasing the clamping frame A or B to be lowered onto the transfer bar structure 20 and advanced to the return station.

[0068] The clamping frames A, B lifting plates 64A have fluid ports to supply the cylinders 100.

[0069] A manifold bar 146 is provided at the load station 12 and forming station 16.

[0070] When the frame A, B is elevated the bar 146 has aligned parts sealed to parts on the plates 64A.

[0071] A separate clamping mechanism 150 ensures a sealing engagement and also, in the forming station 16, prevents movement of the clamping frame A or B. This establishes a fluid connection to a pneumatic supply circuit 152.

[0072] Figures 18A, 18B show the principle of sheet loading in station 12.

[0073] Material is pulled from a roll of sheet material and over a lift table 154, and then cut off. The material overlaps all four edges. The table 154 is driven up to position the sheet S inside the frame A or B with gripper clamping bars open.

[0074] The grippers are activated to grip the sheet edge and complete loading of the sheet into the frame A or B, which is then lowered onto the transfer bar structure 40 as described above.

[0075] While two clamping frames have been described, additional clamping frames could be employed in other applications as to reduce the time required to transfer an empty frame back and to reload the same preparatory to a new cycle of heating and

forming.

[0076] In addition, a series of ovens are sometimes employed, each partially heating the sheets which are transferred successively through the series of ovens to reduce the cycle time. In this design, additional clamping frames will be employed for each oven.

[0077] Also, the arrangement is applicable to other thermoforming processes such as "twin sheet" forming, where two sheets are formed into article components and then pressed together to form an integral article.

[0078] Finally, this invention allows unlimited additional stations to be easily added by lengthening the line, while still using a reasonable amount of floor space. The stations can be readily added, changed, or deleted to afford great flexibility of the concept to a wide variety of applications.

[0079] Figures 19-24 diagrammatically depict an alternate form of thermoforming machine 160 in which a pair of frames A, B are successively transferred through a load station, heat station, form station, and standby station as indicated.

[0080] In this machine, a pair of rail systems 162, 164 are provided one for each frame A, B and located one above the other. The frames A, B are movable along the associated rail system 162, 164, and the lower rail 164 is movable up and down as will be described, both passing through the heating station between upper and lower ovens 166, 168, both of which being able to be raised and lowered in this embodiment.

[0081] In the condition shown in Figure 19, frame A is being loaded with a sheet by table 170 preparatory to movement into the heating station. Frame B is in the forming station ready for transfer to the standing station.

[0082] Figure 20 shows the frame A in the heating station with lower oven 168 raised. The lower rail system 164 is lowered from position A to B, and lower oven 168 is lowered to clear sag of the sheet in frame A.

[0083] In Figure 21, frame A has been transferred to the forming station and oven 168 lowered. Forming is being carried out on the sheet in frame A.

[0084] Frame 13 has been transferred to the load station and rail 164 raised from position A to B to be loaded by table 170.

[0085] In Figure 22, frame B is in the heating station and upper oven 166 lowered and lower oven 168 raised.

[0086] Frame A is being readied for transfer to the standby station, after forming and removal of the part and scrap in the forming station.

[0087] In Figure 22, the frame B is heated and lower and upper ovens 166, 168 returned preparatory to transfer to the forming station. The frame A has been transferred to the standby station.

[0088] In Figure 24, the frame A has been returned to the loading station and frame B to the forming station.

[0089] This version eliminates the need for making and breaking connections to the frame clamp actuators, but involves movement of the frames back through the oven which could affect the heat cycle, and also

requires both upper and lower ovens to move, as well as the lower rail system 164.

Claims

1. A thermoforming machine of the type including a heating station for preheating a sheet of thermoplastic material and a forming station whereat said preheated sheet is formed into an article by being shaped by tooling in said forming station, the improvement comprising:
 - a plurality of clamping frames, and clamping means for gripping a sheet in each of said clamping frames at a loading station ahead of said heating station; and
 - a linear transfer system including means for successively advancing each clamping frame loaded with a sheet through said heating and forming stations, an elevator mechanism raising each clamping frame after being advanced out of said forming station to a return station, and an upper return transfer drive system receiving each elevated clamping frame and moving each elevated clamping frame back over said heating station to a position over said loading station, and a lowering mechanism returning each clamping frame to said lower transfer system.
2. The thermoforming machine according to claim 1 wherein said lower transfer system comprises a horizontally extending transfer bar structure and drive means for reciprocating said transfer bar structure between a retracted and an advanced position; said transfer bar structure in said retracted position extending from said loading station whereat said clamping frames are loaded with a sheet to said forming station and in said advanced position extending from said heating station to said return station.
3. The thermoforming machine according to claim 1 or 2 further including lift means for raising said clamping frames after being advanced by forward movement of said transfer bar structure to allow return of said transfer bar structure.
4. The thermoforming machine according to claim 2 or 3 wherein said transfer bar structure includes a series of retractable locator element sets allowing lengthwise securement of said clamp frames in either of three lengthwise positions correspond to the locators beneath said stations in said retracted and advanced positions of said transfer bar structure.
5. The thermoforming machine according to any of the foregoing claims wherein each of said clamping frames has a pivotal portion to which a portion of a loaded sheet is clamped, and further including means for pivoting said portion when said clamping frame is at said forming station, said means including an extendible pivotal structure normally not engaging said portion but extendible to engage said pivotal portion and pivot the same preparatory to a forming operation on a sheet loaded thereon.
6. The thermoforming machine according to claim 3, 4 or 5 wherein said clamping frames have a series of pneumatically-operated gripper clamps, and further including a detachable fluid pressure connection established at said load and forming stations when said clamping frames are raised by said lift means to enable gripping and releasing operation of said grippers to enable engagement and release respectively of said sheet at said loading and forming stations.
7. The thermoforming machine according to any of claims 2 to 6 wherein said return transfer drive system includes an upper transfer bar structure and means for releasably grasping a clamping frame elevated to the underside of said upper transfer bar structure.
8. The thermoforming machine according to any of claims 2 to 7 wherein separate reciprocal strokes of transfer bar structure separately advance each of said clamping frames from station to station.
9. A thermoforming machine for thermoforming a sheet to be loaded into a clamping frame, said clamping frame advanced into a forming station by a transfer system;
 - said clamping frame having a pivoted portion pivoted with respect to a fixed portion, said pivoted portion having means clamping a portion of said sheet loaded therein; and
 - pivot actuation means at said forming station including structure extendible to come into engagement with said pivoted portion and swing the same upward with respect to remaining portion of said pivot frame preparatory to forming said sheet in said forming station.
10. A method of transferring sheets preparatory to each being clamped in one of a plurality of clamping frames formed in a thermoforming machine, said transfer being from a heating station to a forming station, comprising the steps of:
 - loading one of said sheets into a first clamping frame to support said sheet therein;
 - advancing said first clamping frame into a heat-

ing station;
 thereafter loading another sheet into a second
 clamping frame;
 advancing said first clamping frame out of said
 heating station and into a forming station hori- 5
 zontally spaced from said heating station and
 linearly aligned with said loading and heating
 stations;
 advancing said second clamping frame into
 said heating station; 10
 removing a formed article from said first clamp-
 ing frame and advancing said first clamping
 frame out of said forming station and into a
 return station;
 elevating said first clamping frame above said 15
 heating station;
 returning said first clamping frame to said load
 station along a path extending above said heat-
 ing station;
 advancing said second clamping frame from 20
 said heating station to said forming station;
 removing a formed article from said second
 clamping frame and advancing said second
 clamping frame out of said forming station and
 into said return station; and 25
 repeating said steps to continually form articles
 from sheets loaded successively into said first
 and second clamping frames.


11. The method according to claim 10 wherein in said 30
 step of advancing said first and second clamping
 frames, a transfer bar structure is reciprocated
 repeatedly, said first and second clamping frames
 lifted therefrom in said stations during the return
 movement of said transfer bar structure. 35



12. The method according to claim 10 or 11 further 40
 including the steps of extending locating elements
 into said first and second clamping frames during
 advancing thereof.


13. A thermoforming machine of the type including a 45
 heating station for preheating a sheet of thermo-
 plastic material and a forming station whereat said
 preheated sheet is formed into an article by being
 shaped by tooling in said forming station, the
 improvement comprising:



a plurality of clamping frames, and clamping 50
 means for gripping a sheet in each of said
 clamping frames at a loading station ahead of
 said heating station; and
 an upper and lower rail system, each holding a
 respective clamping frame mounted for recipro- 55
 cal movement thereon;
 each respective clamping frame moving
 through said heating and forming stations and
 back to said loading station.

14. The thermoforming machine according to claim 13
 wherein said lower rail is movable vertically and
 said heating station includes upper and lower mov-
 able ovens.

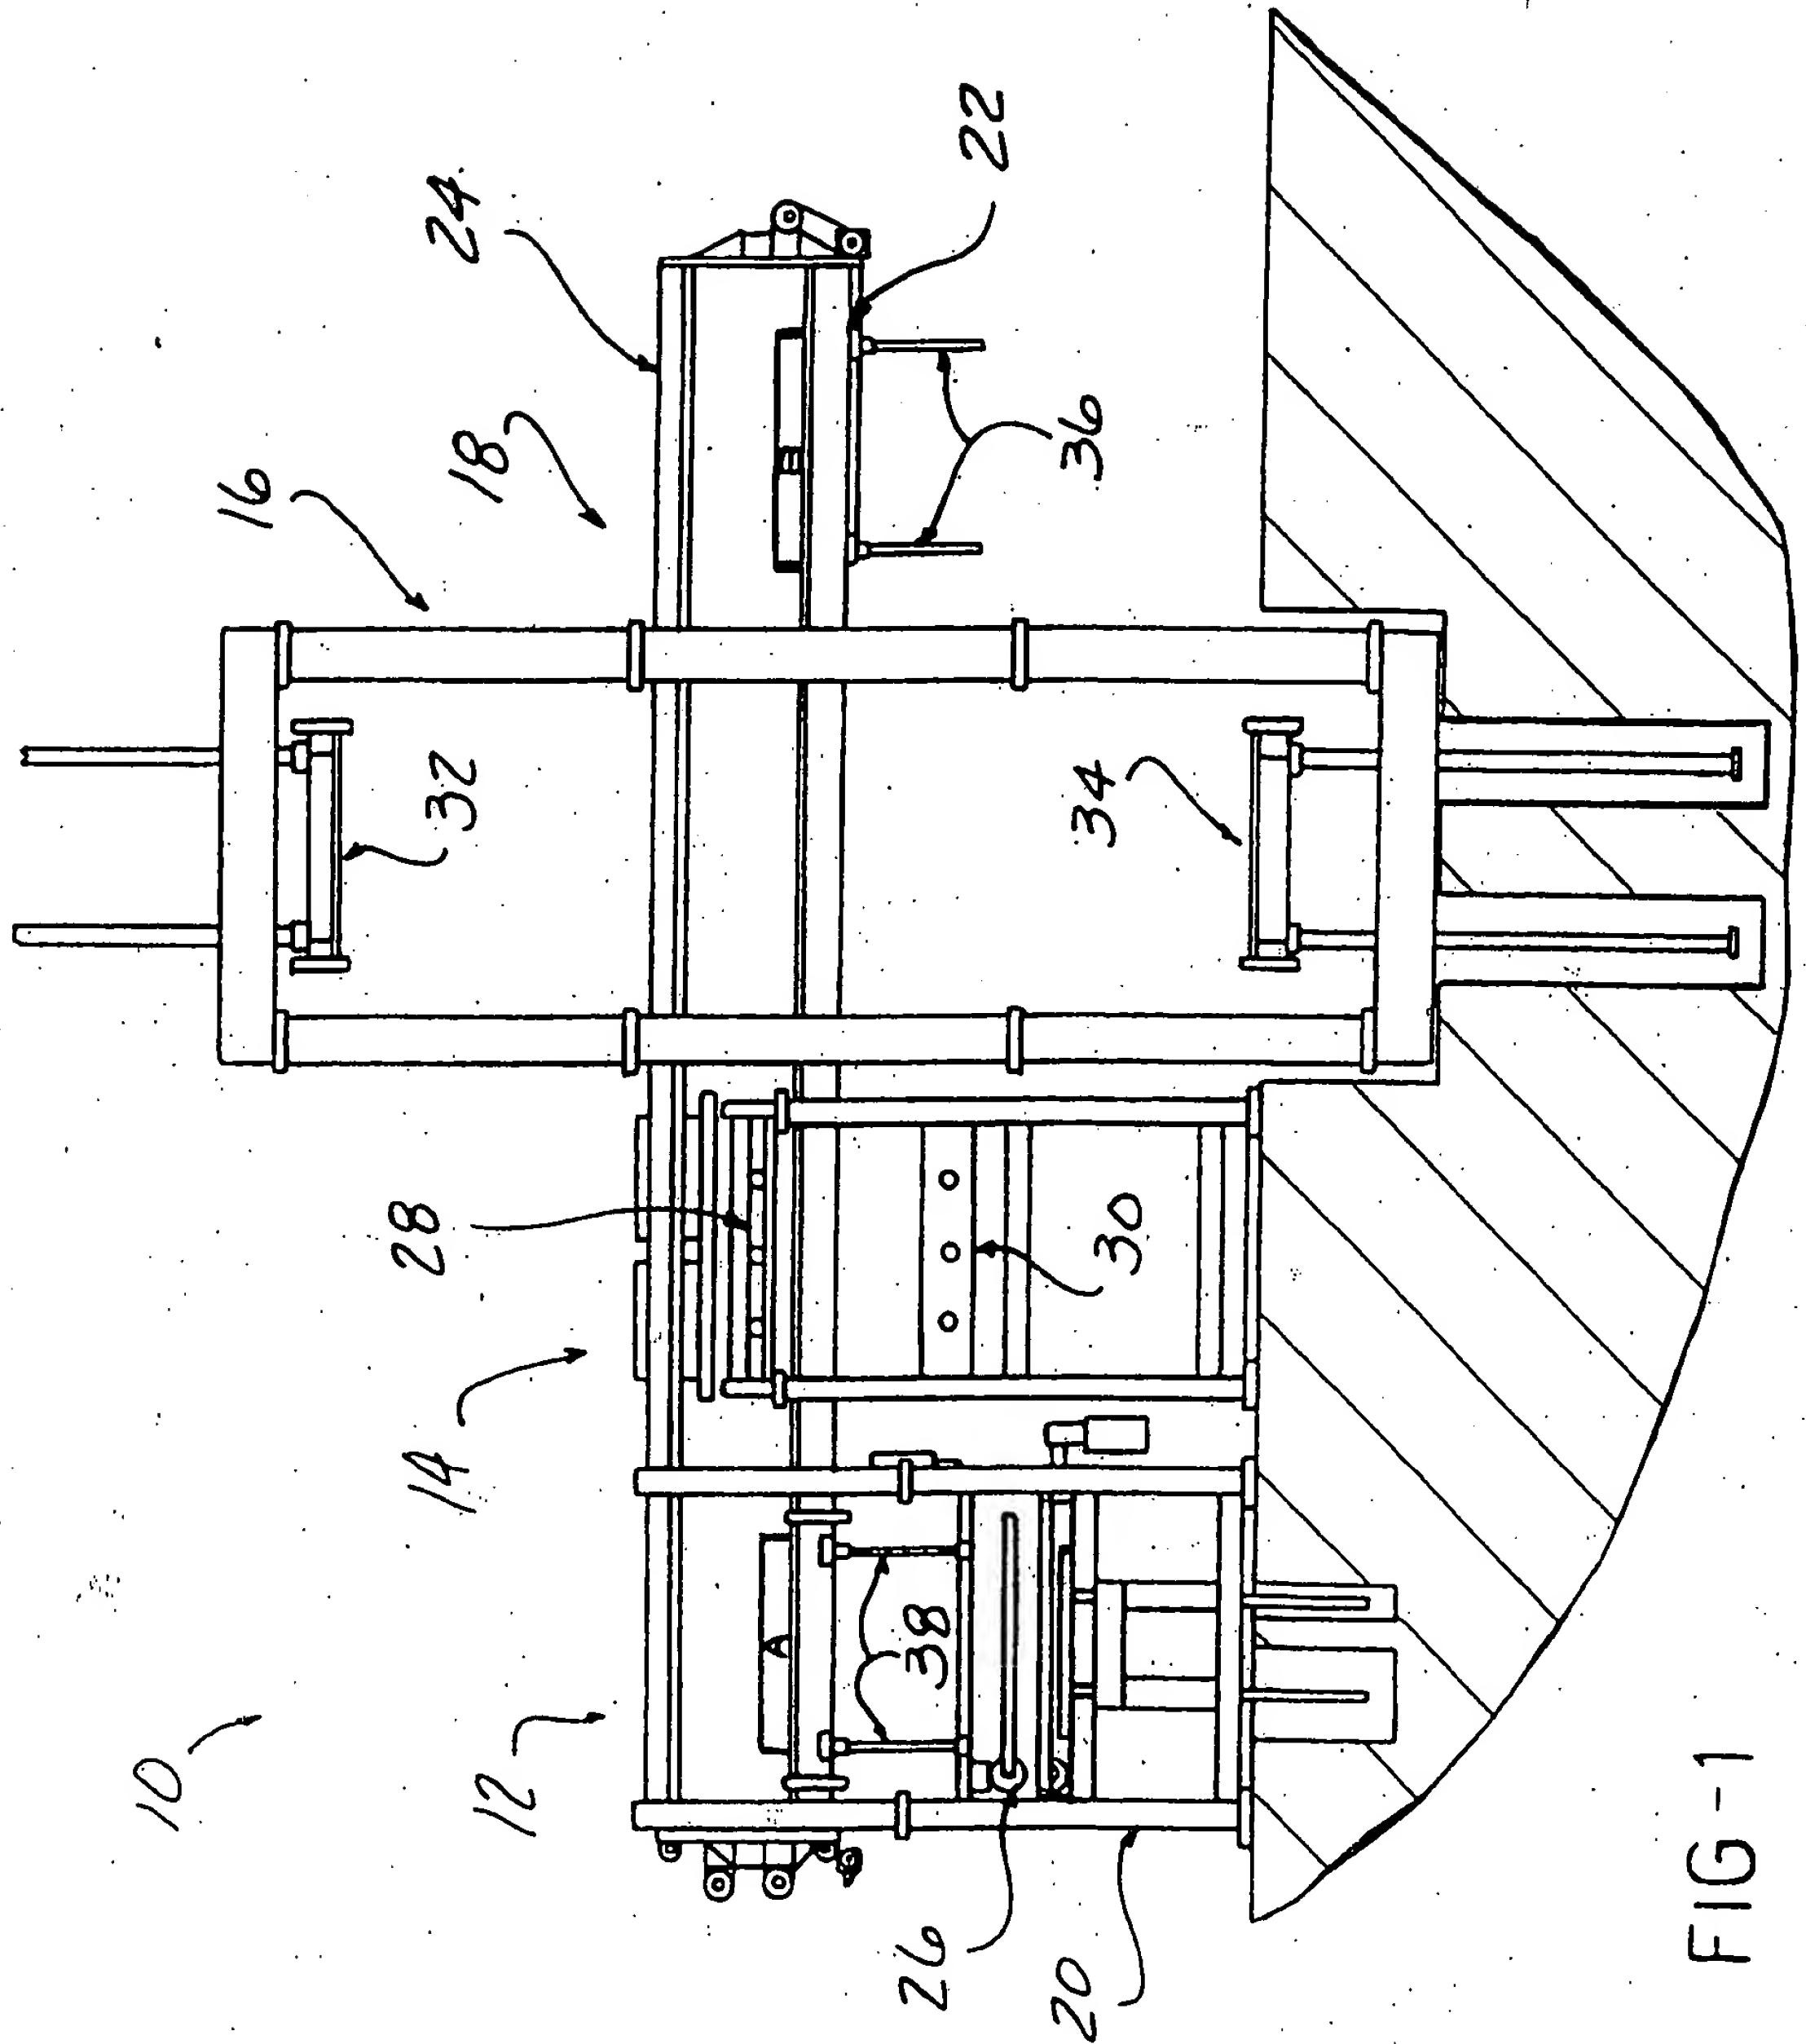

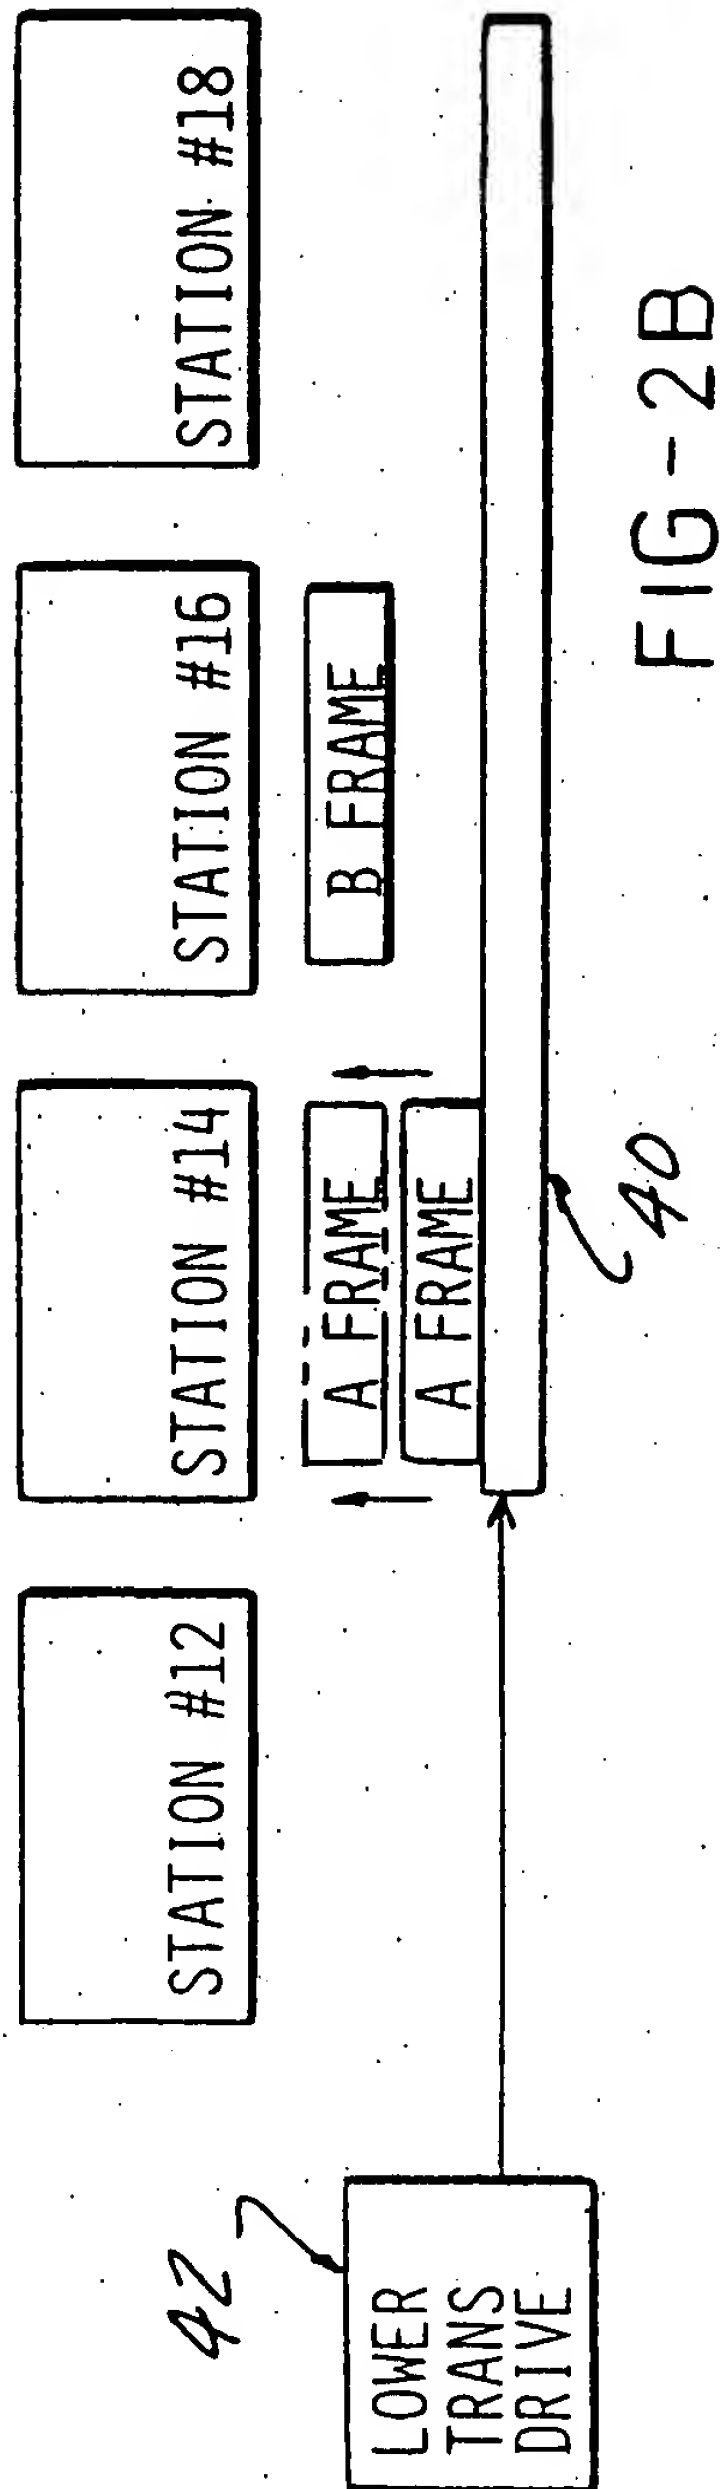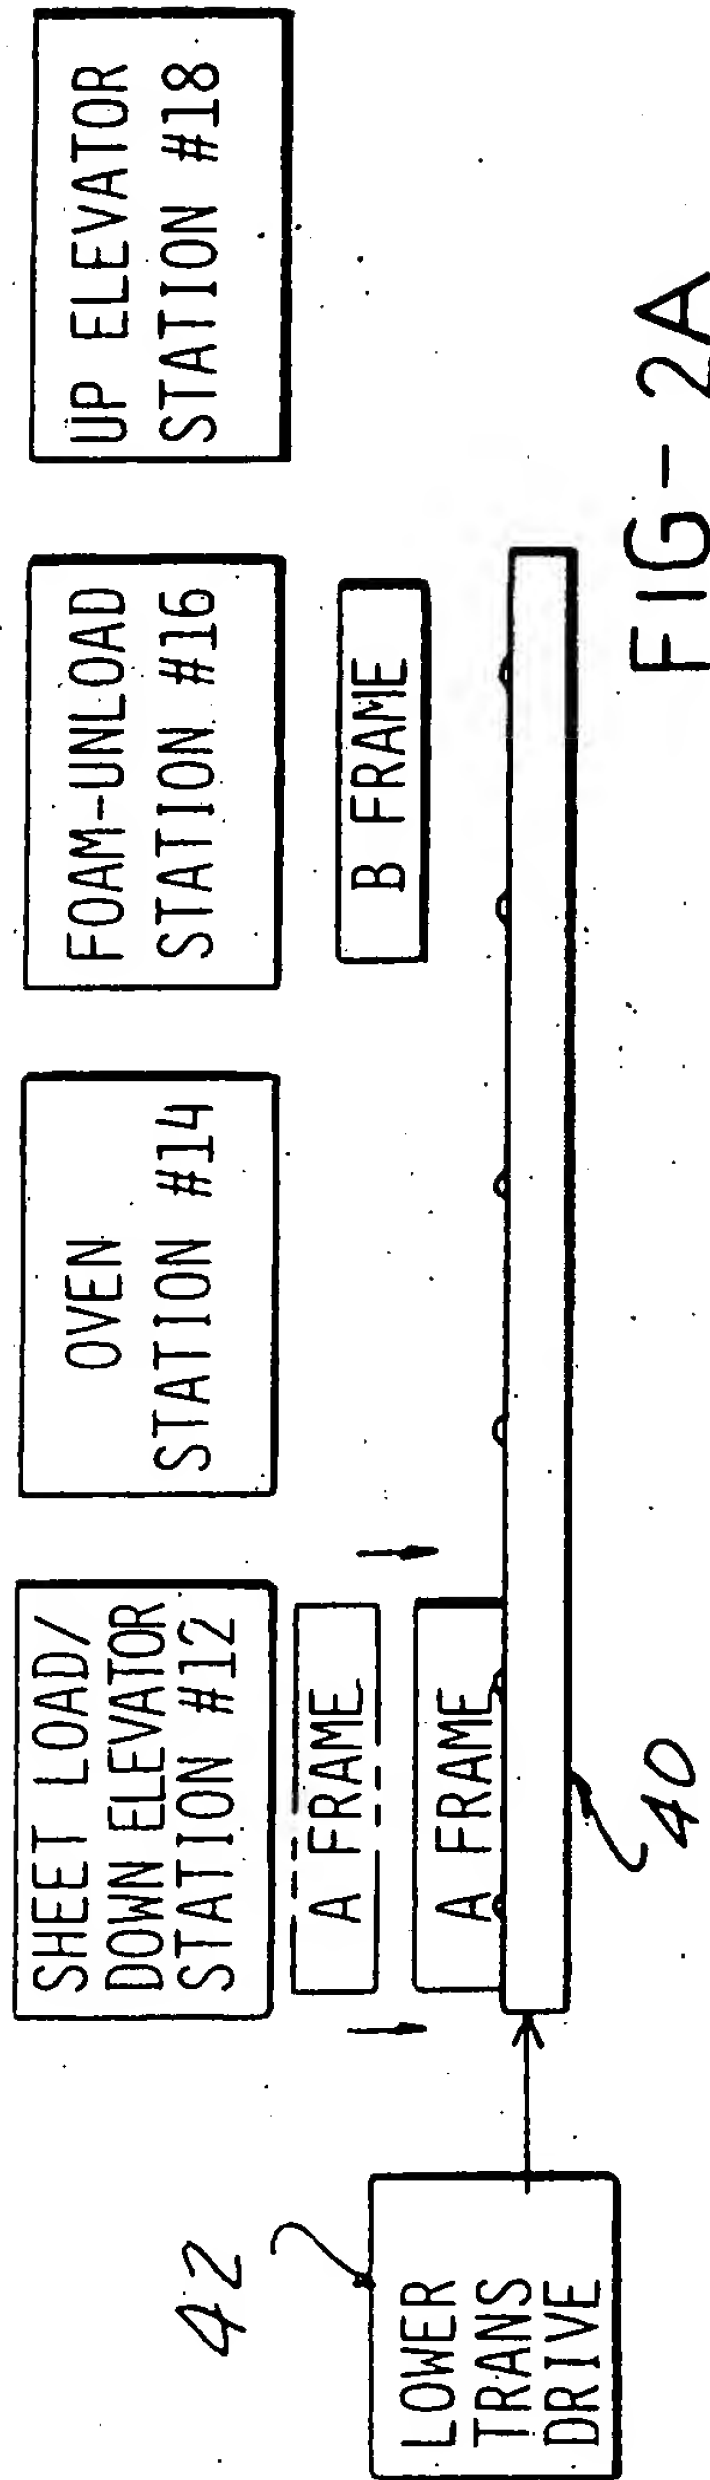

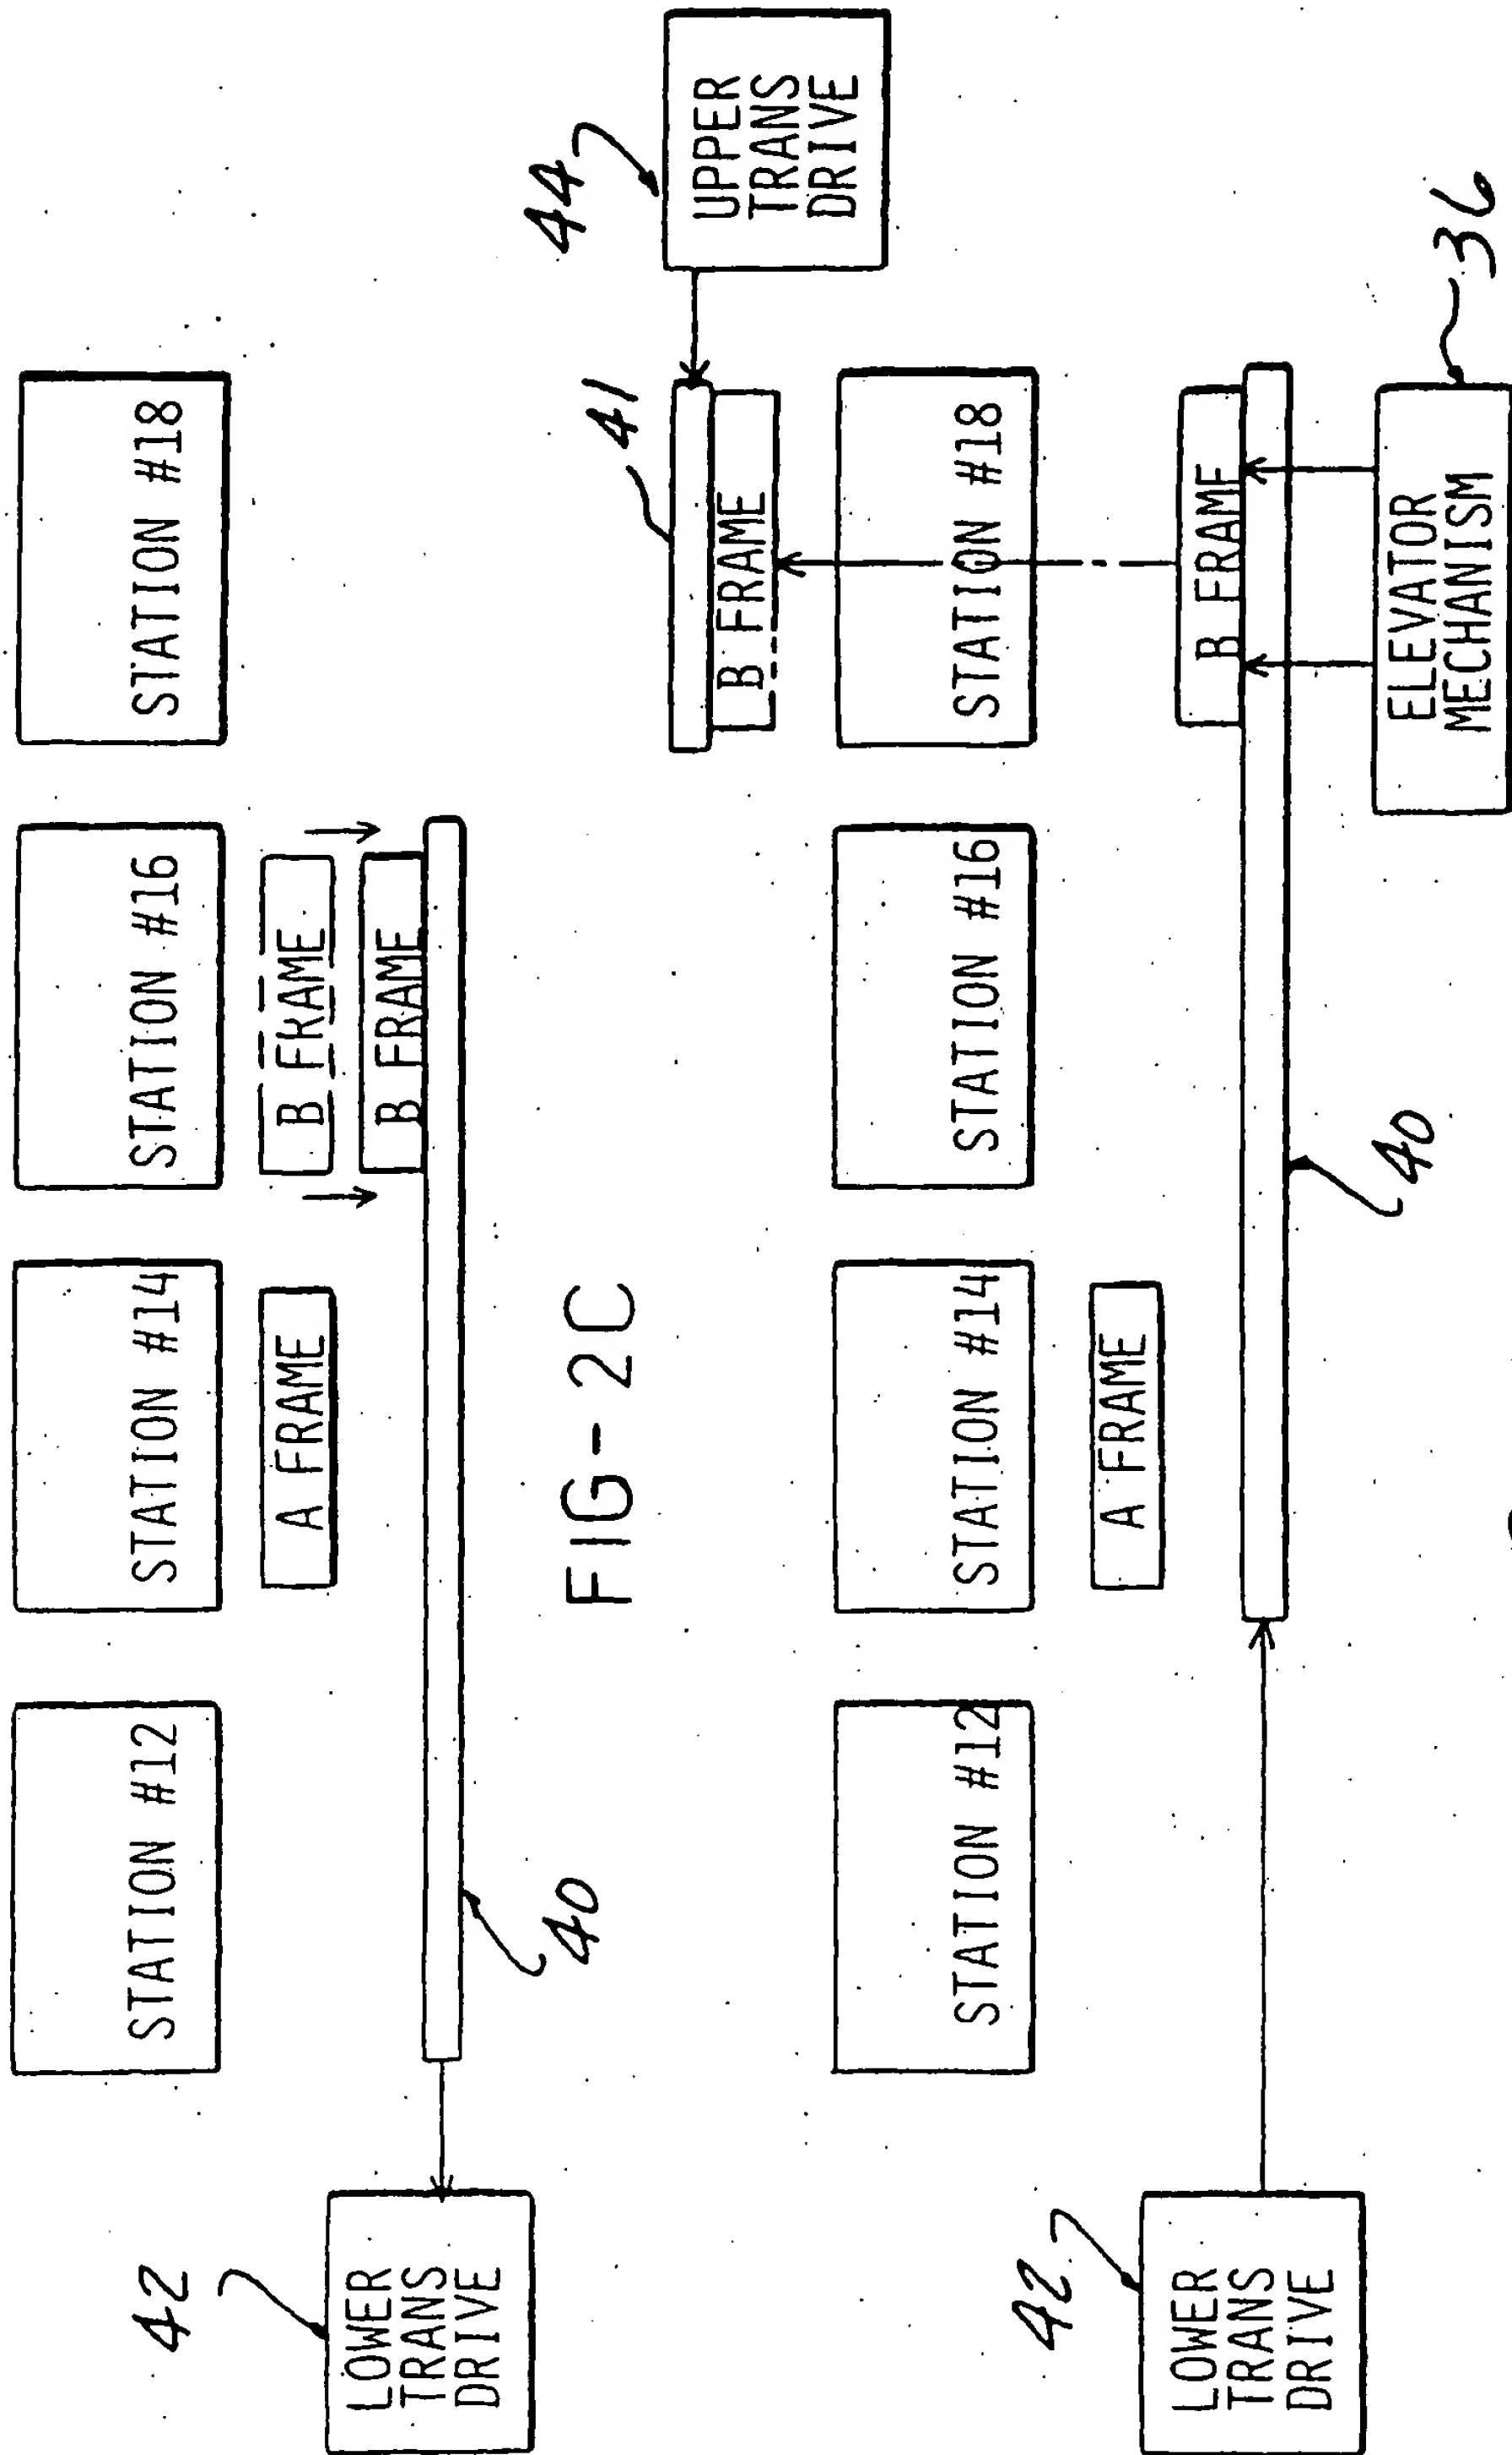

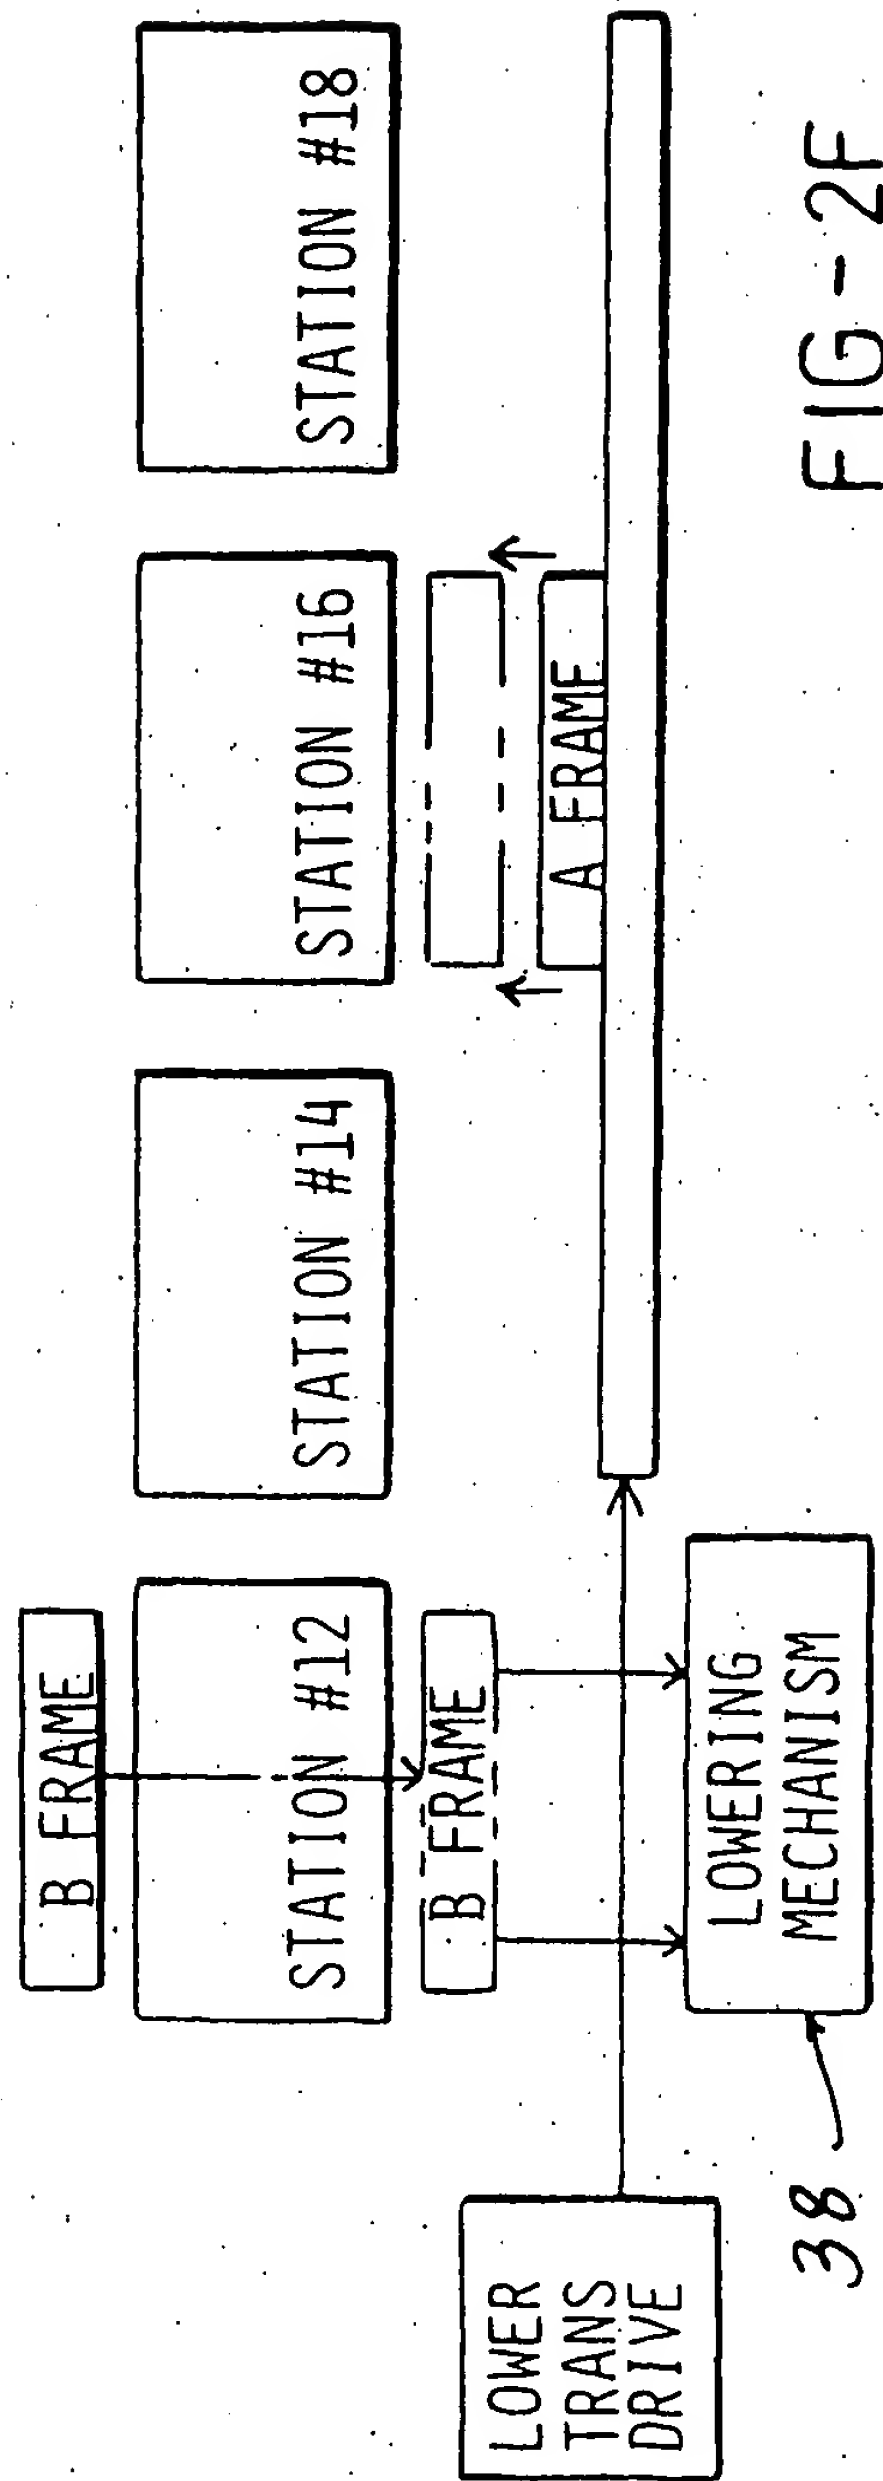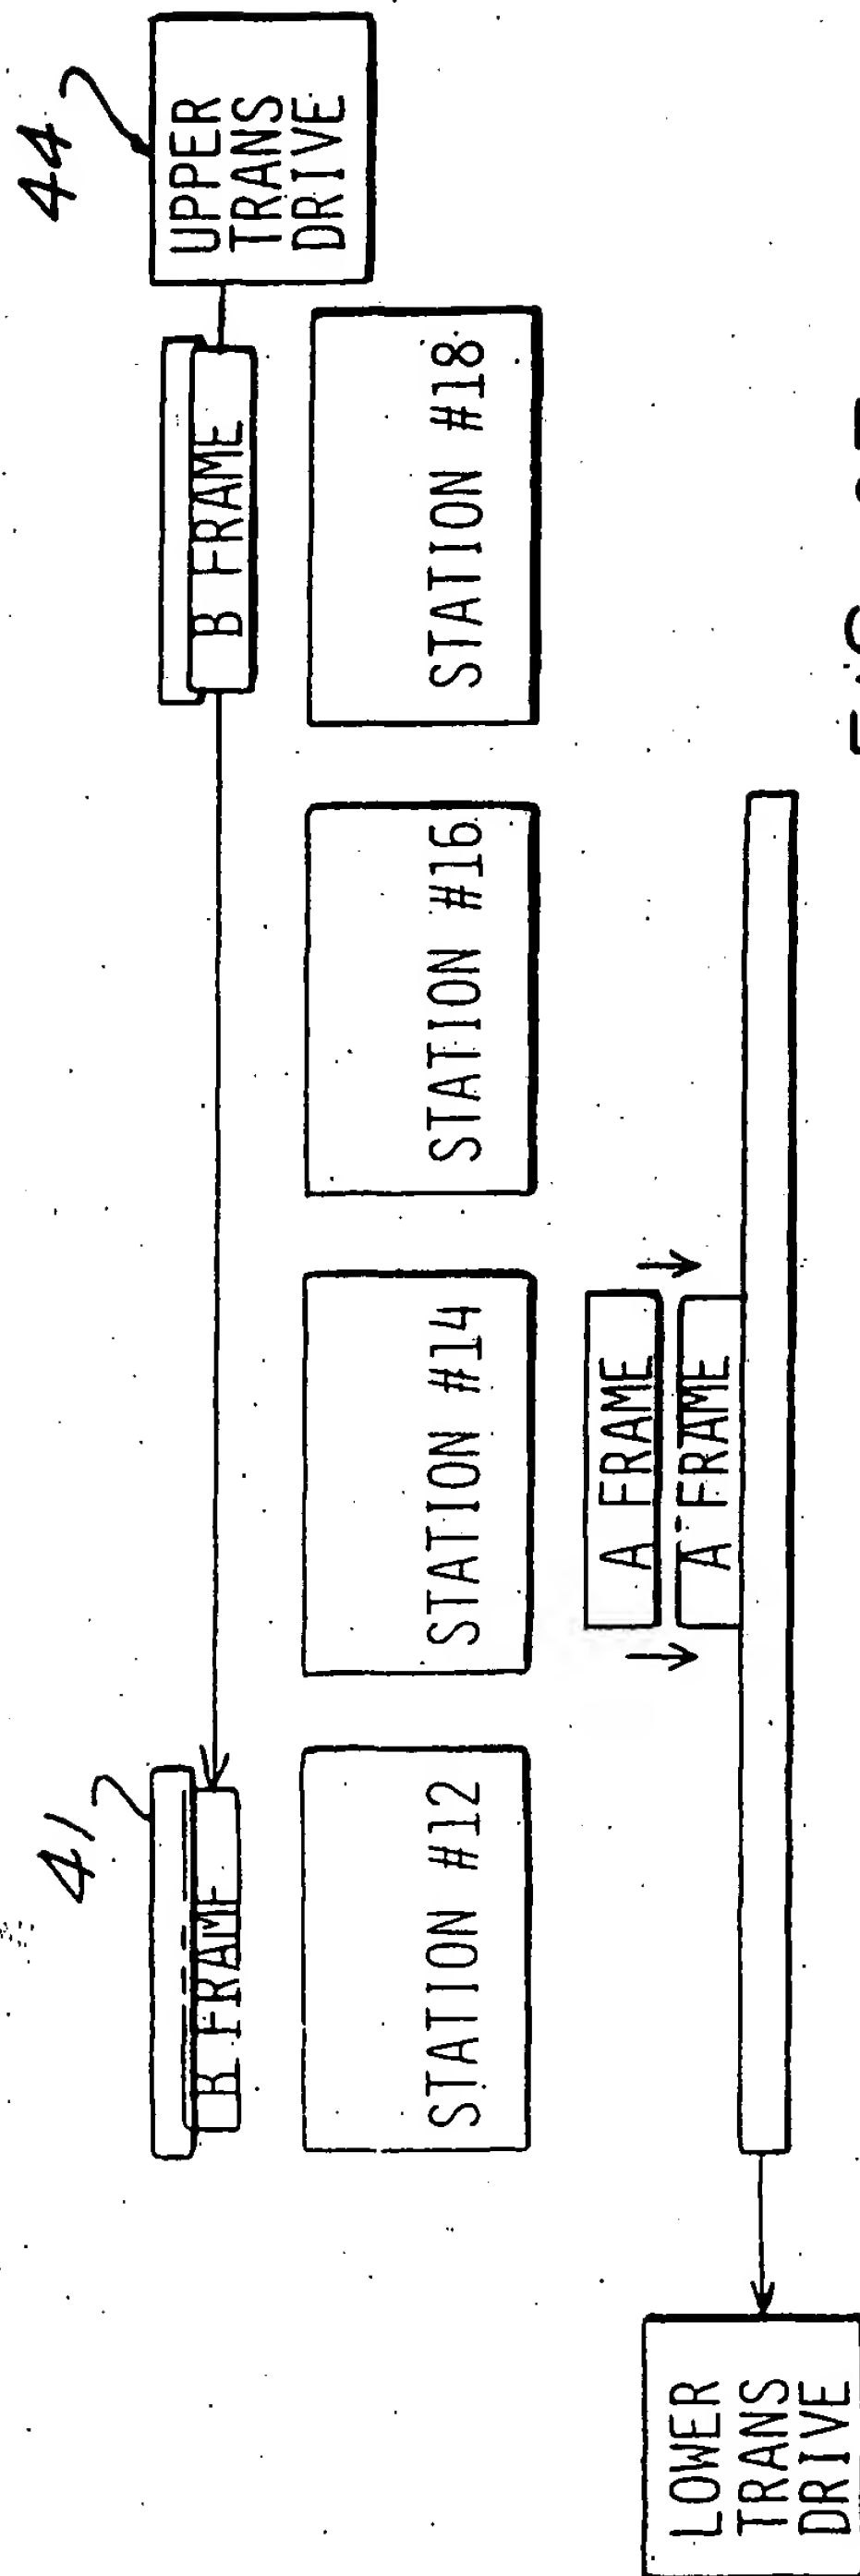

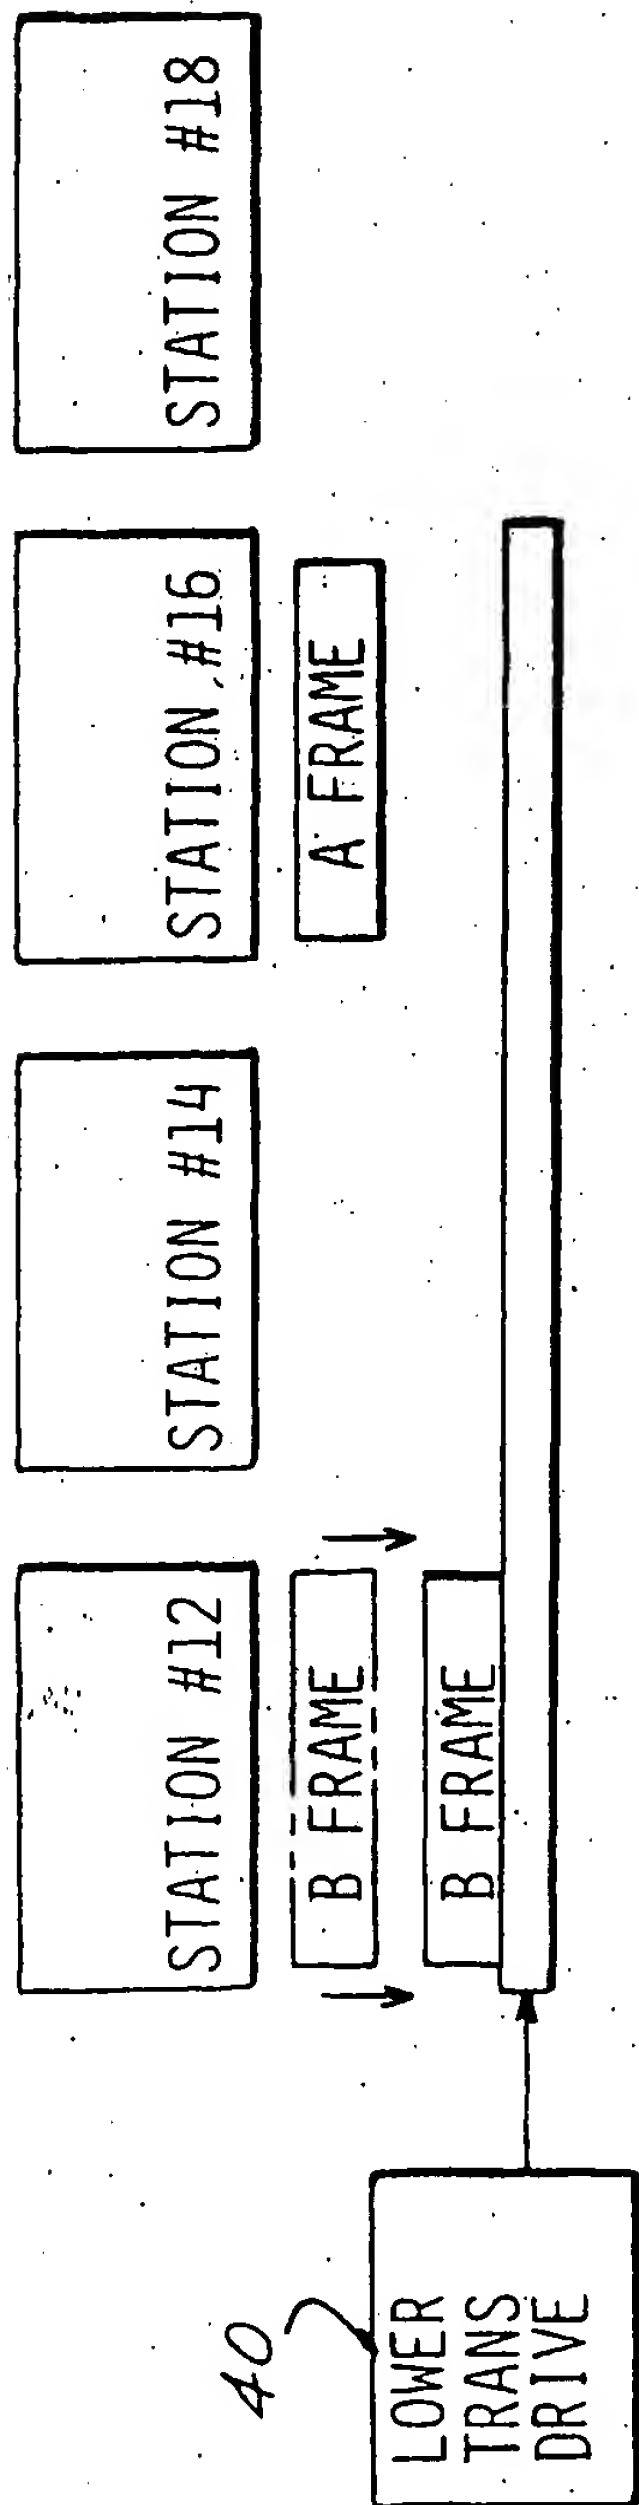


FIG-26



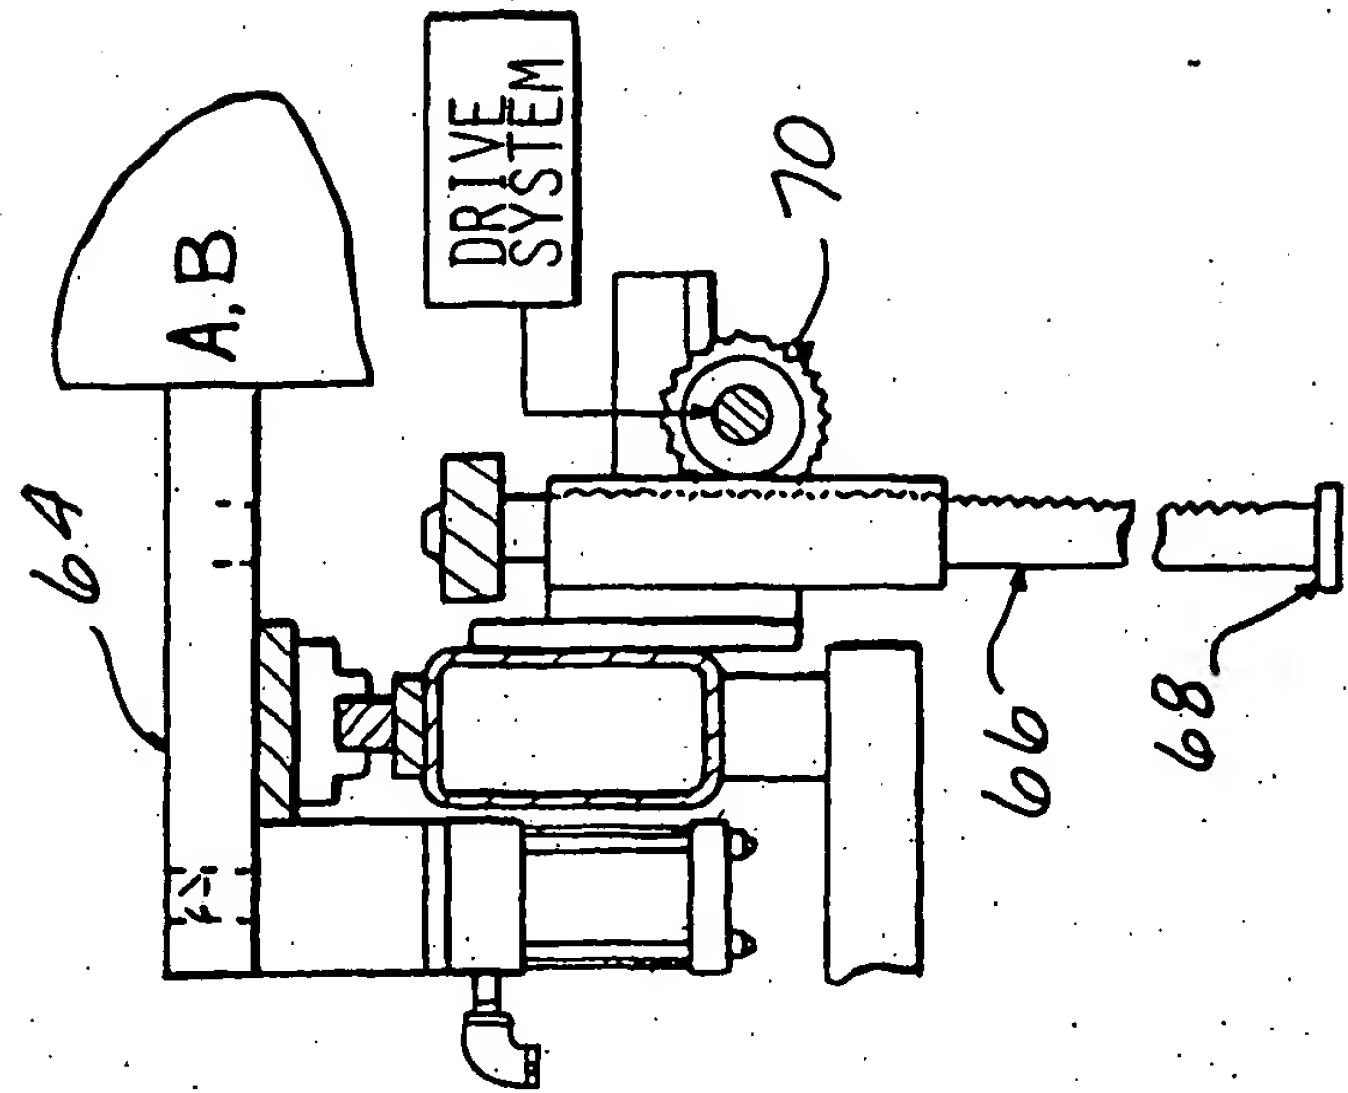


FIG-5




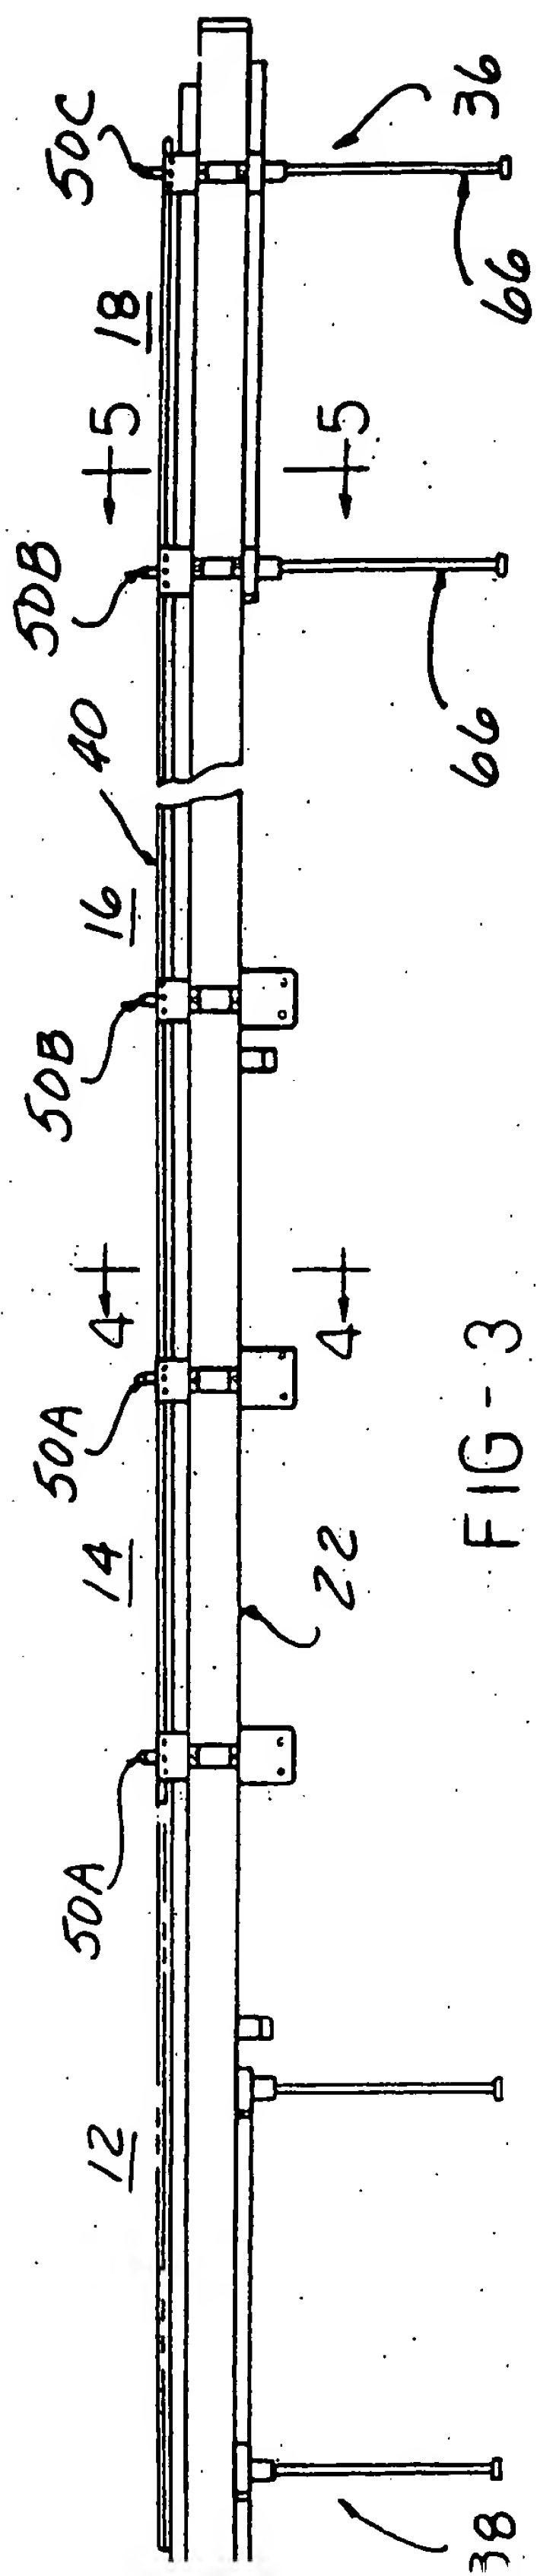


3-1944

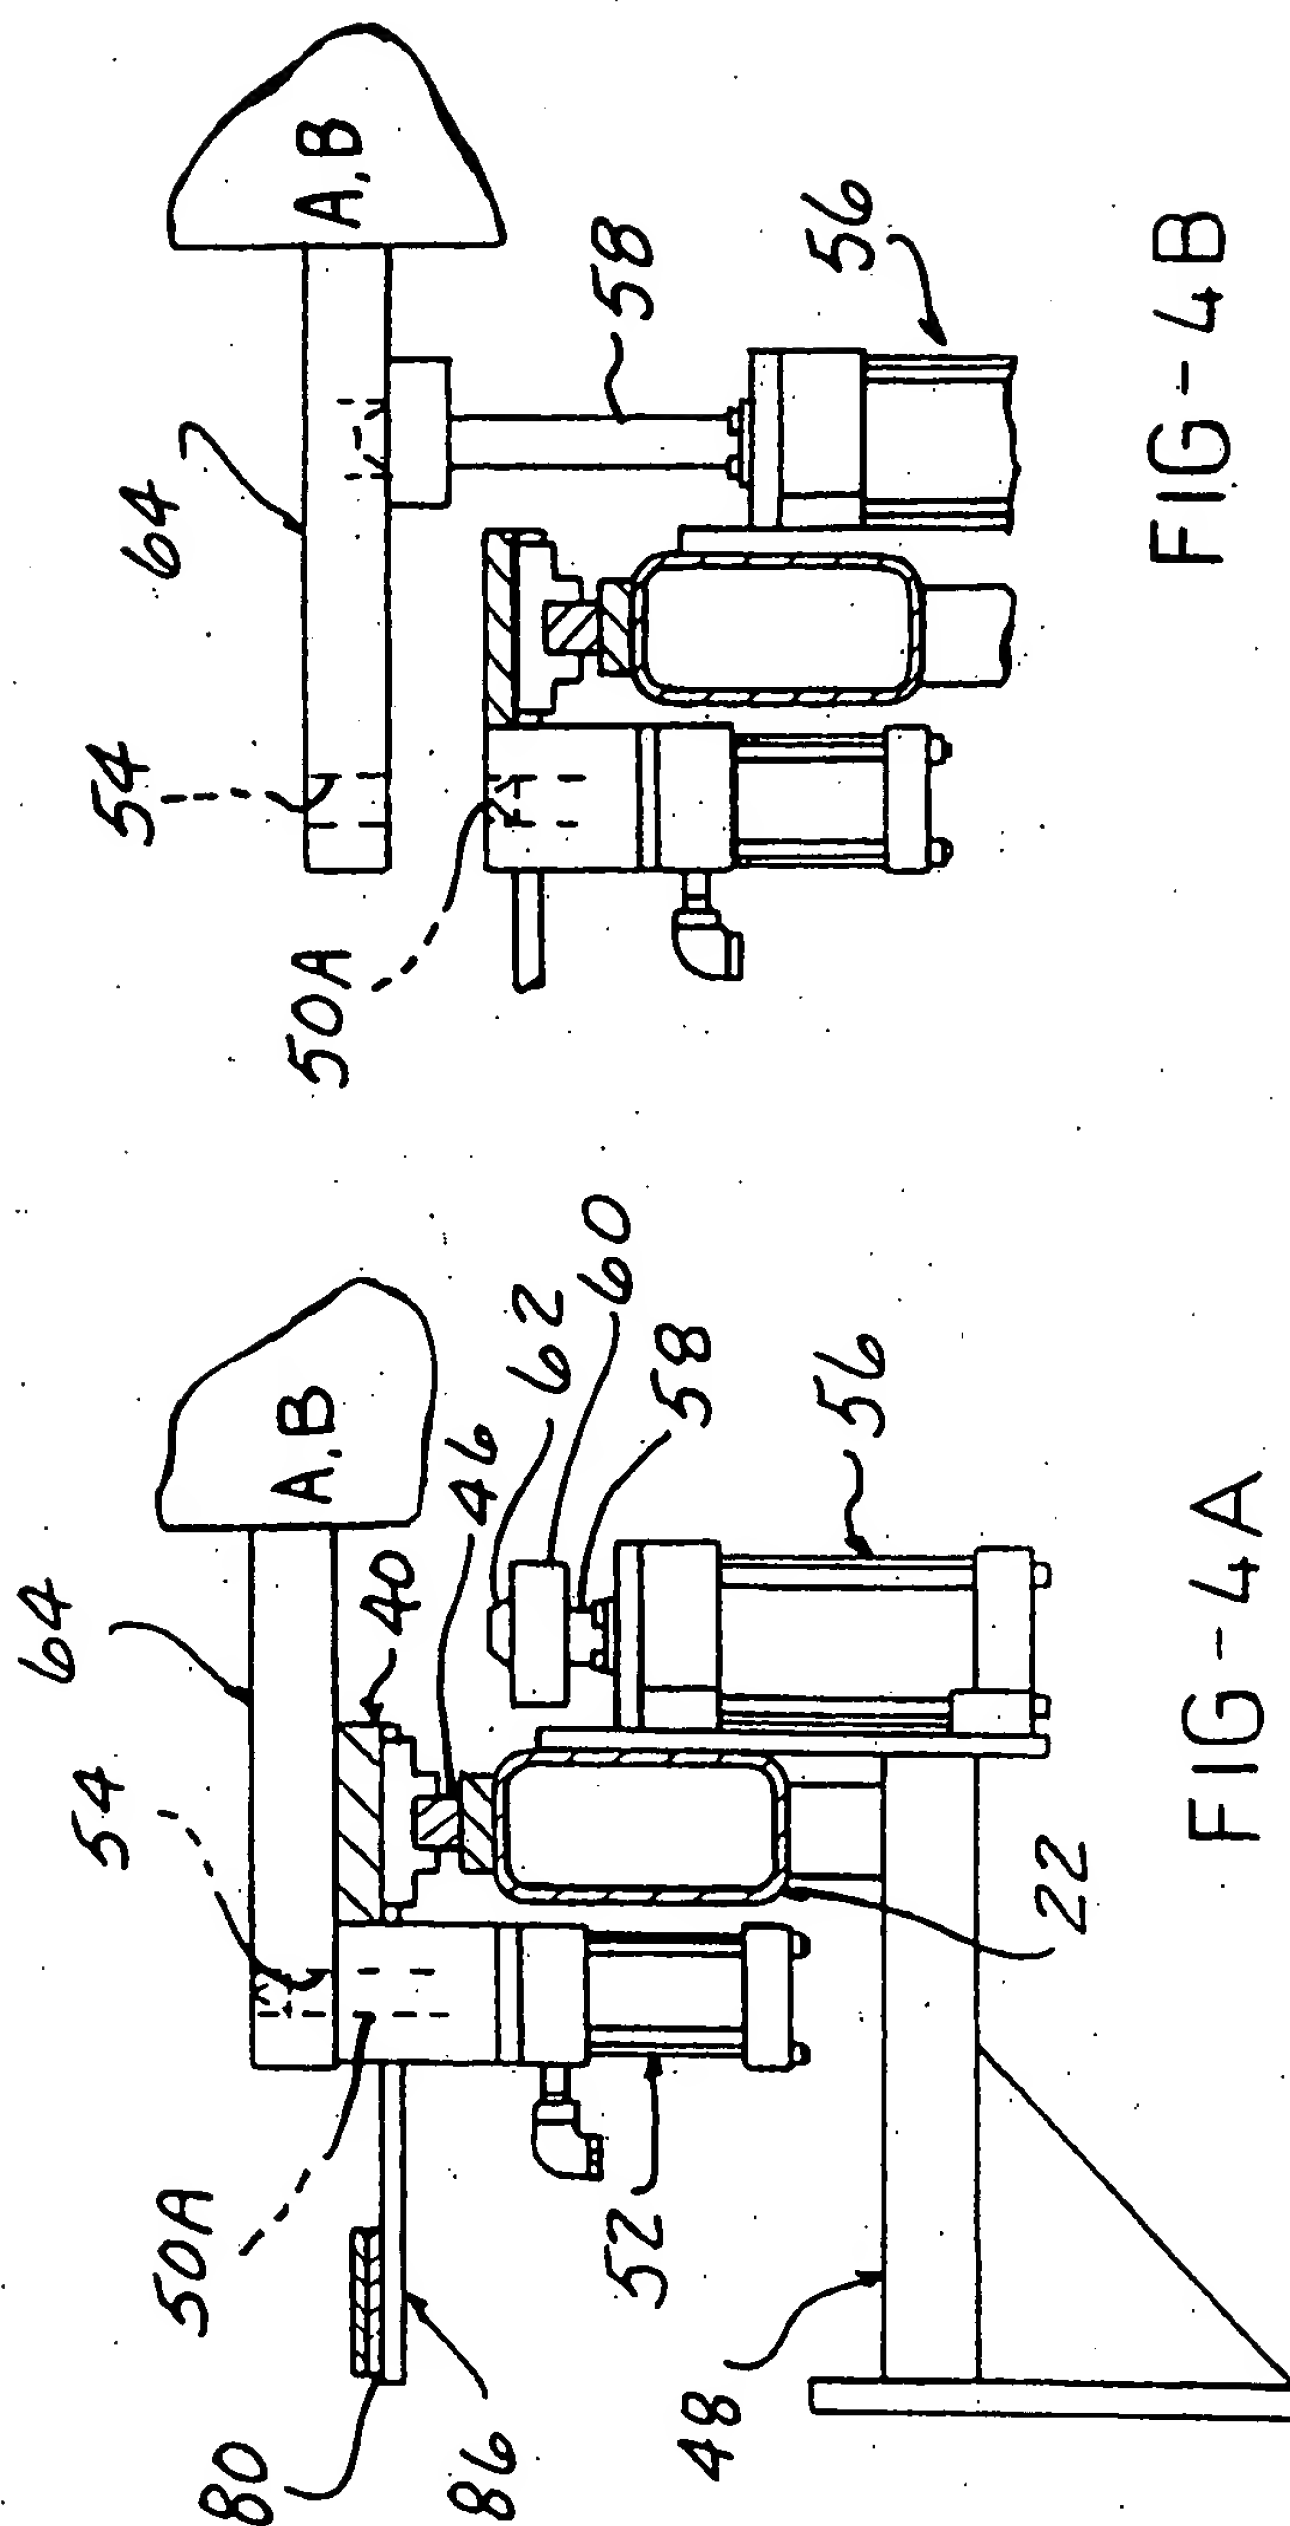

B7-G1F

FIG-4A

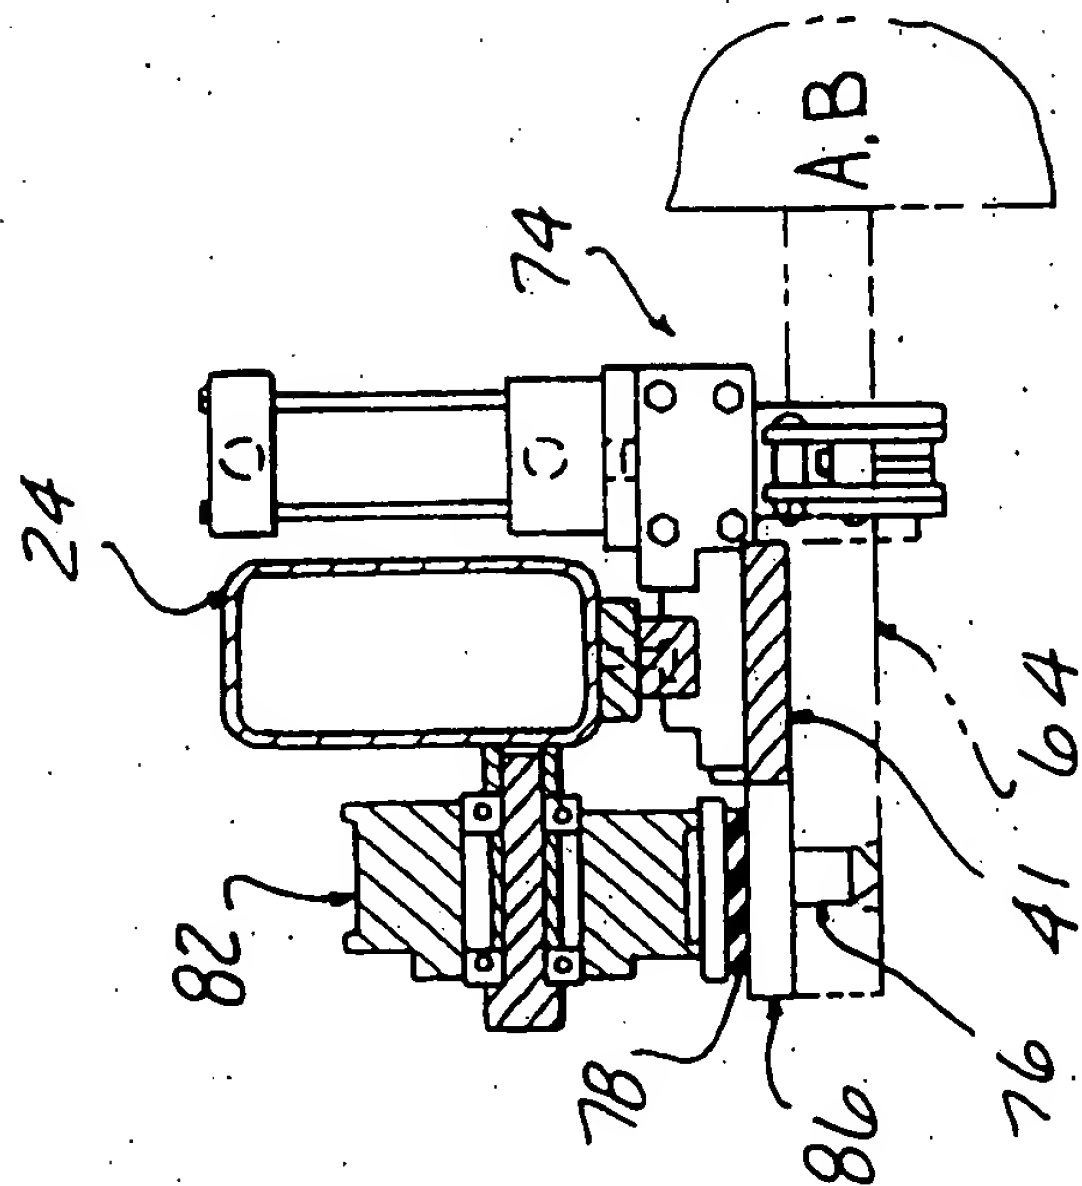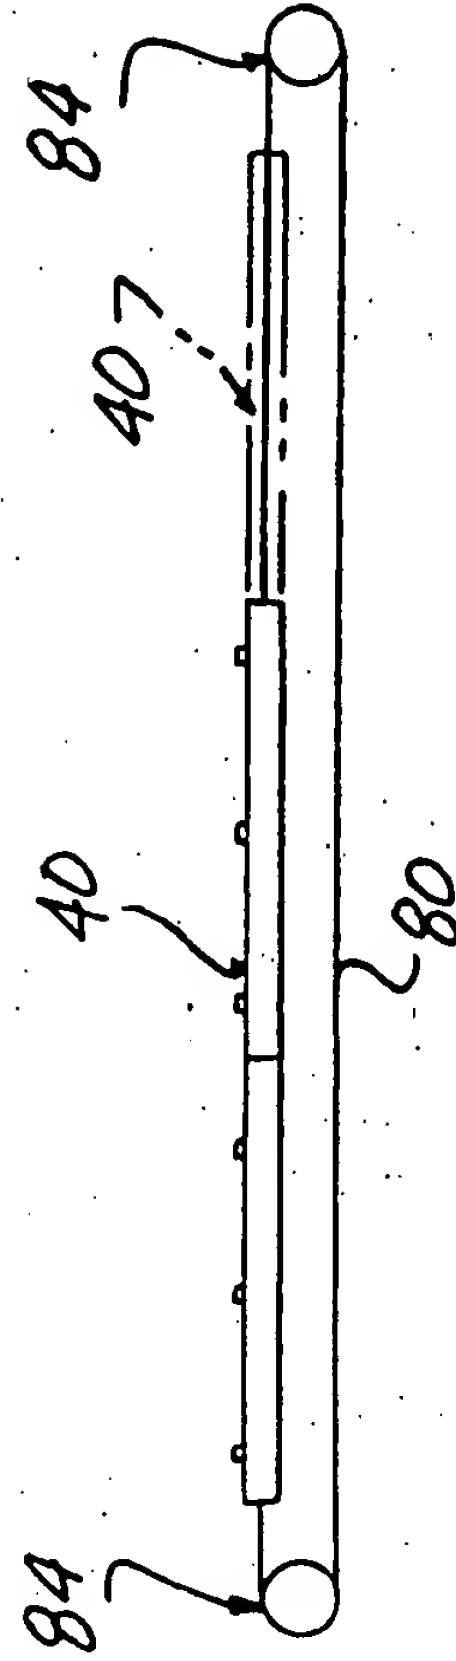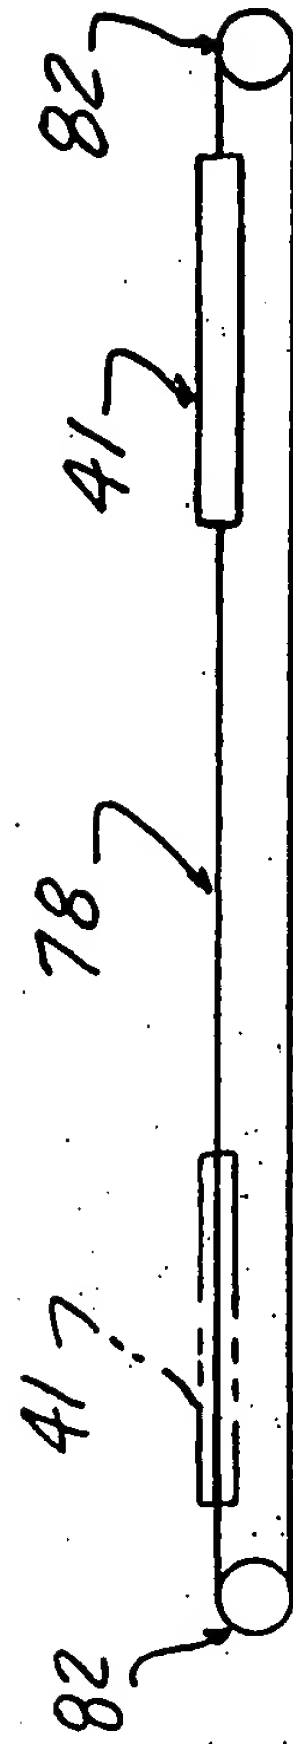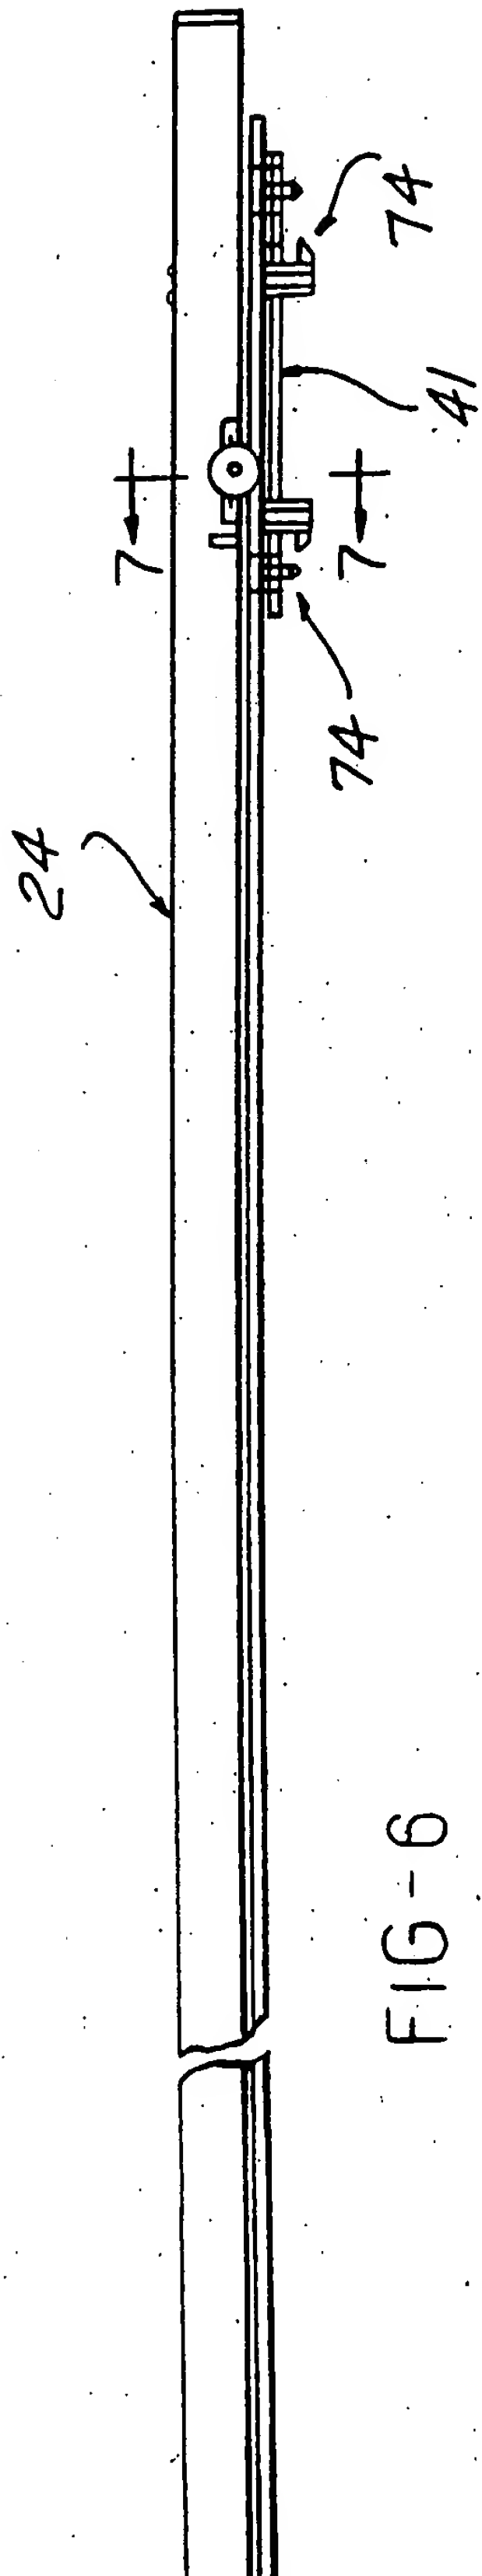

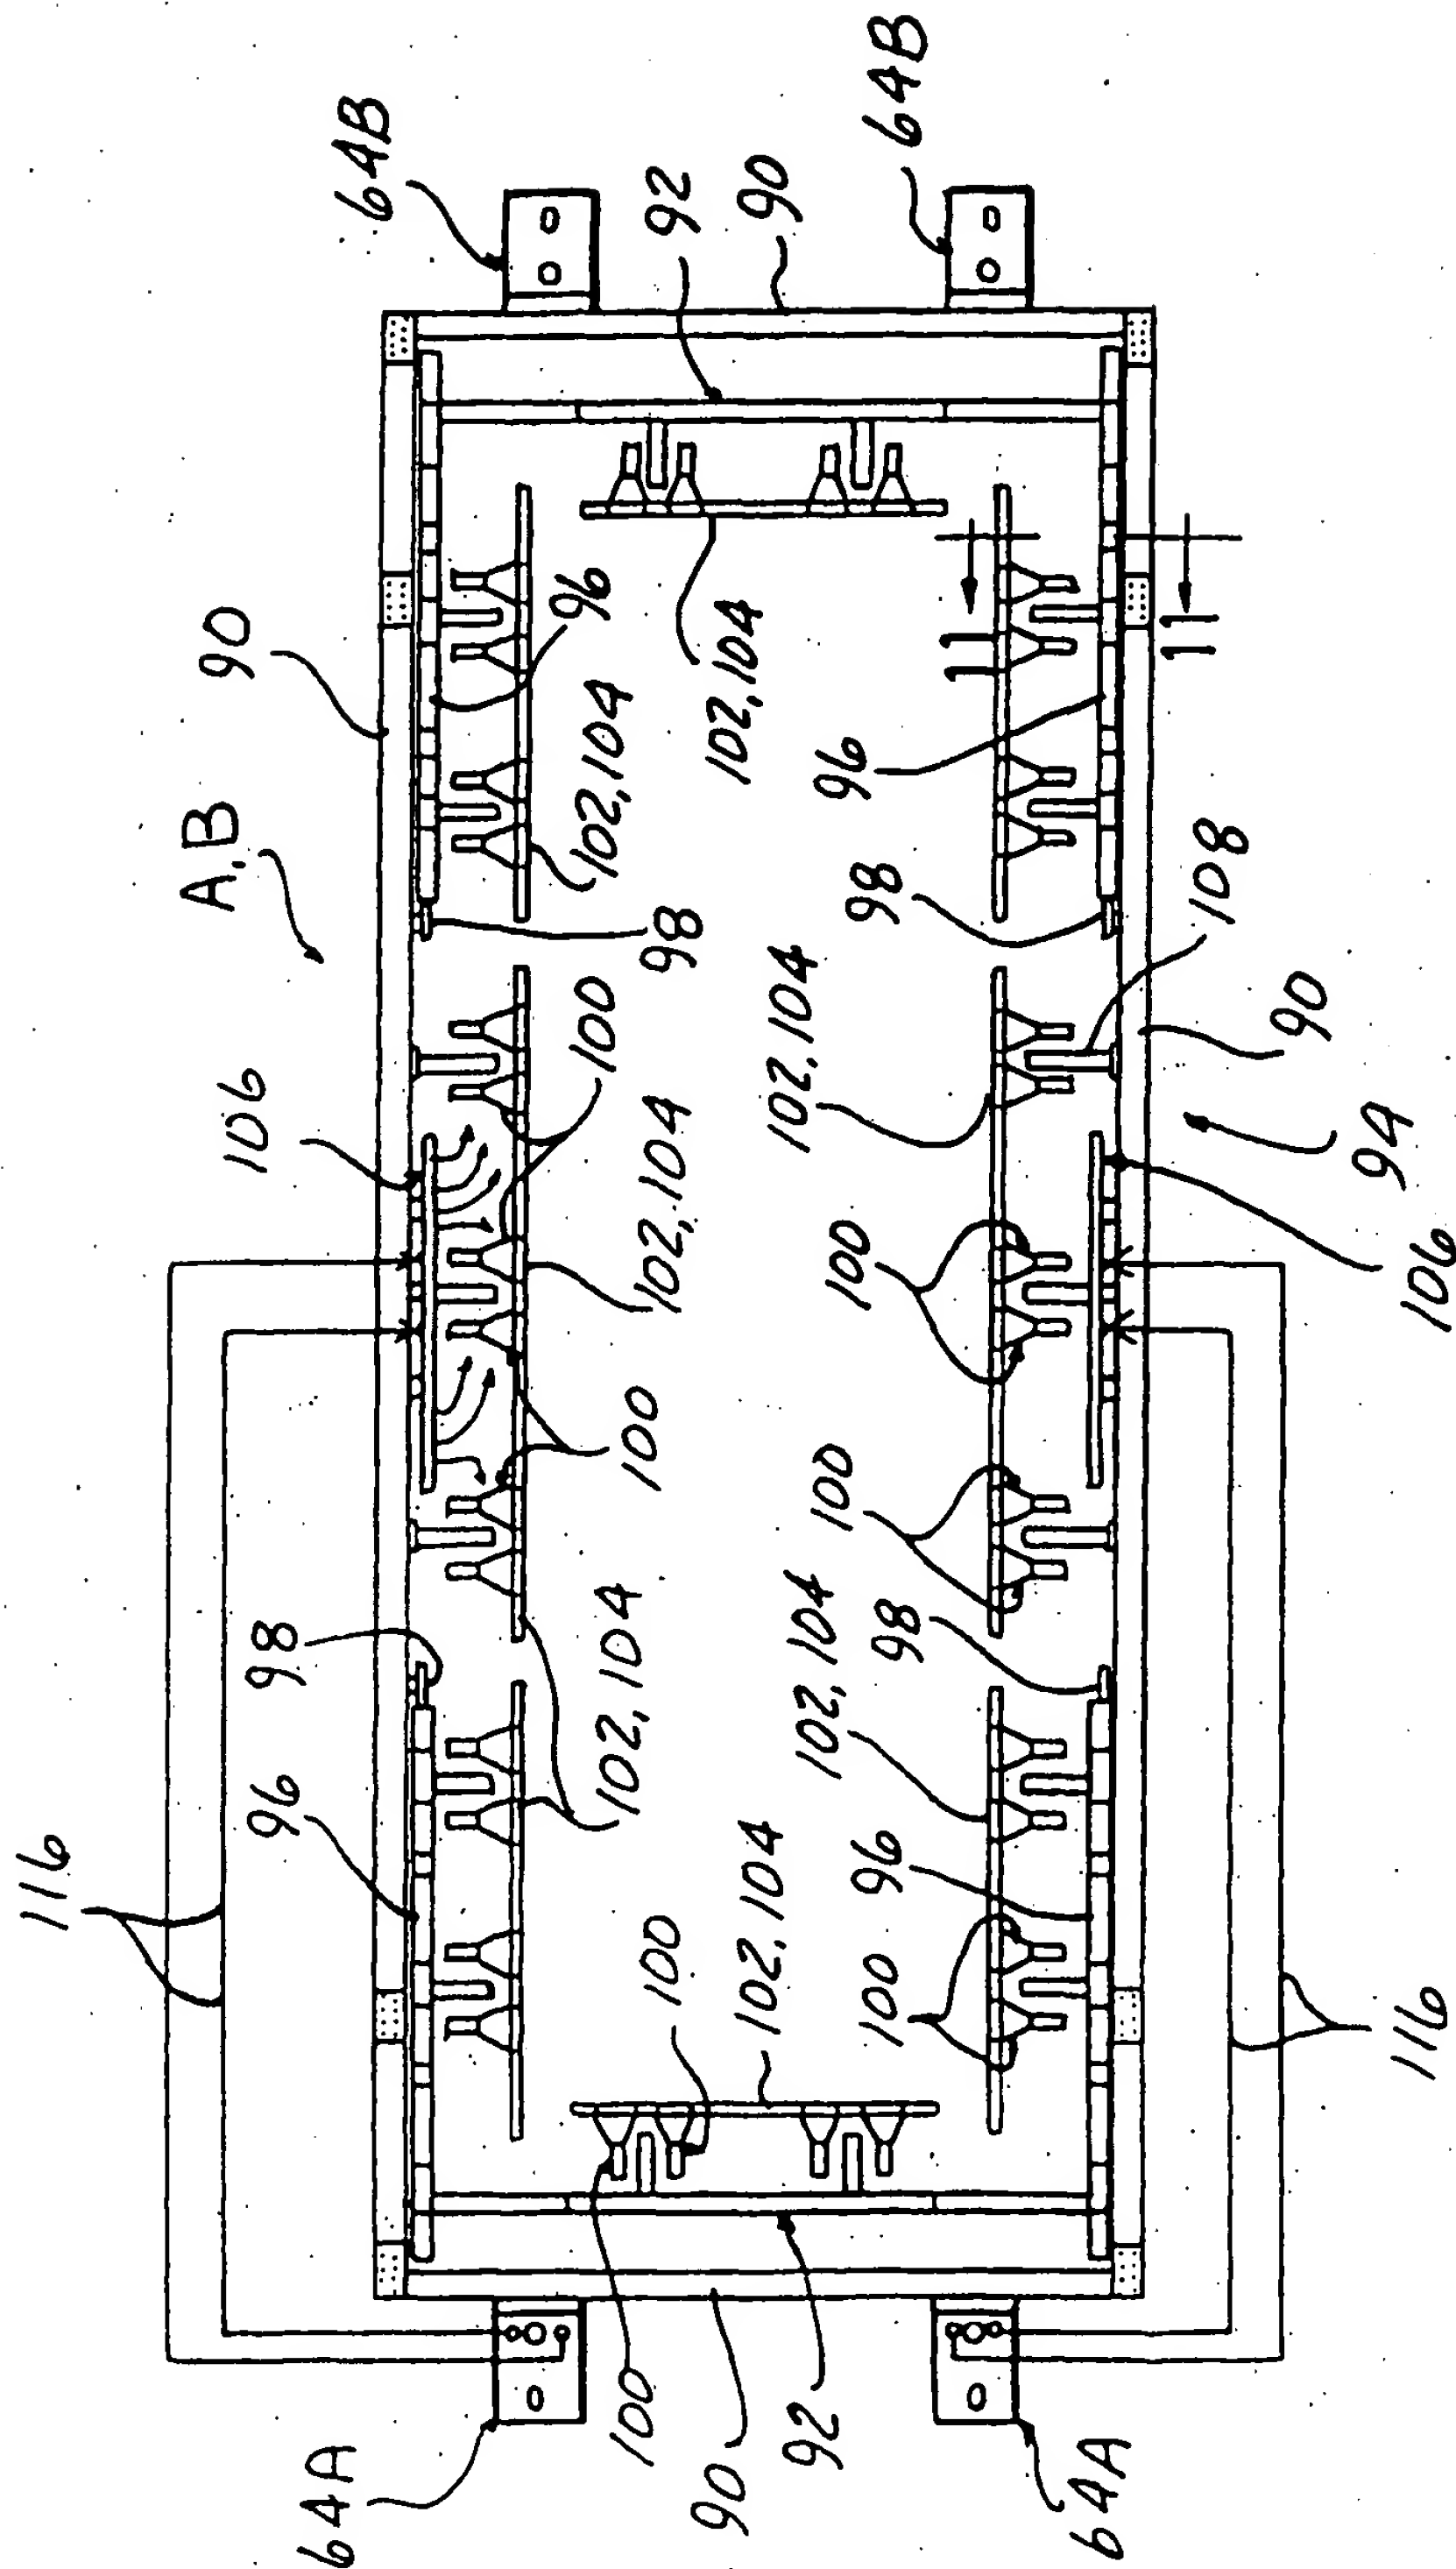


FIG-10

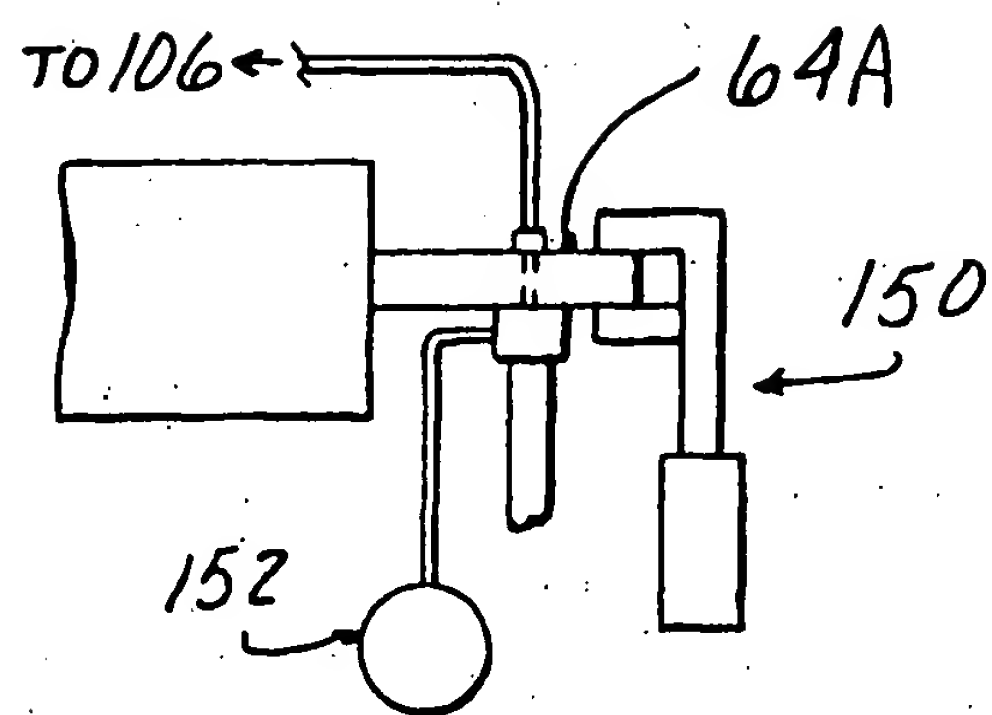


FIG-17

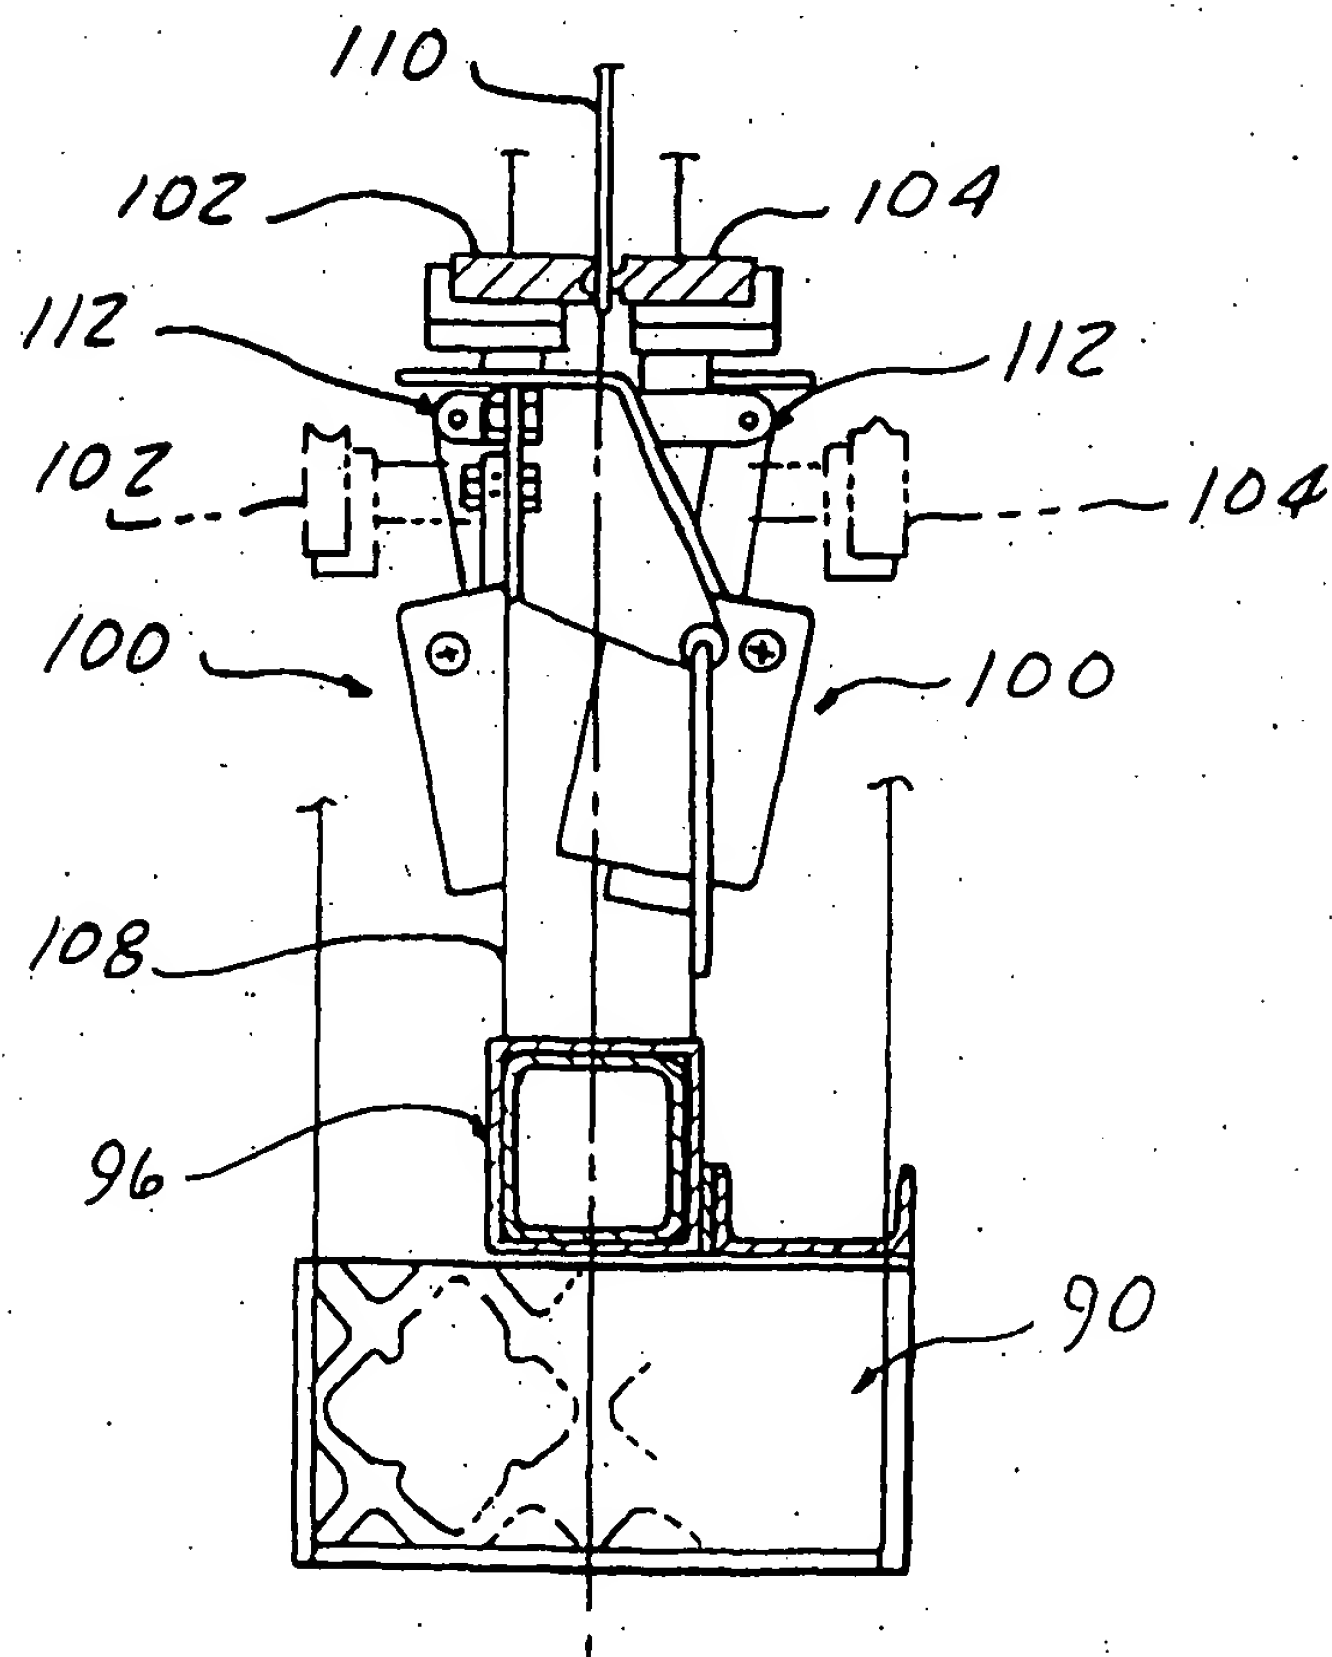
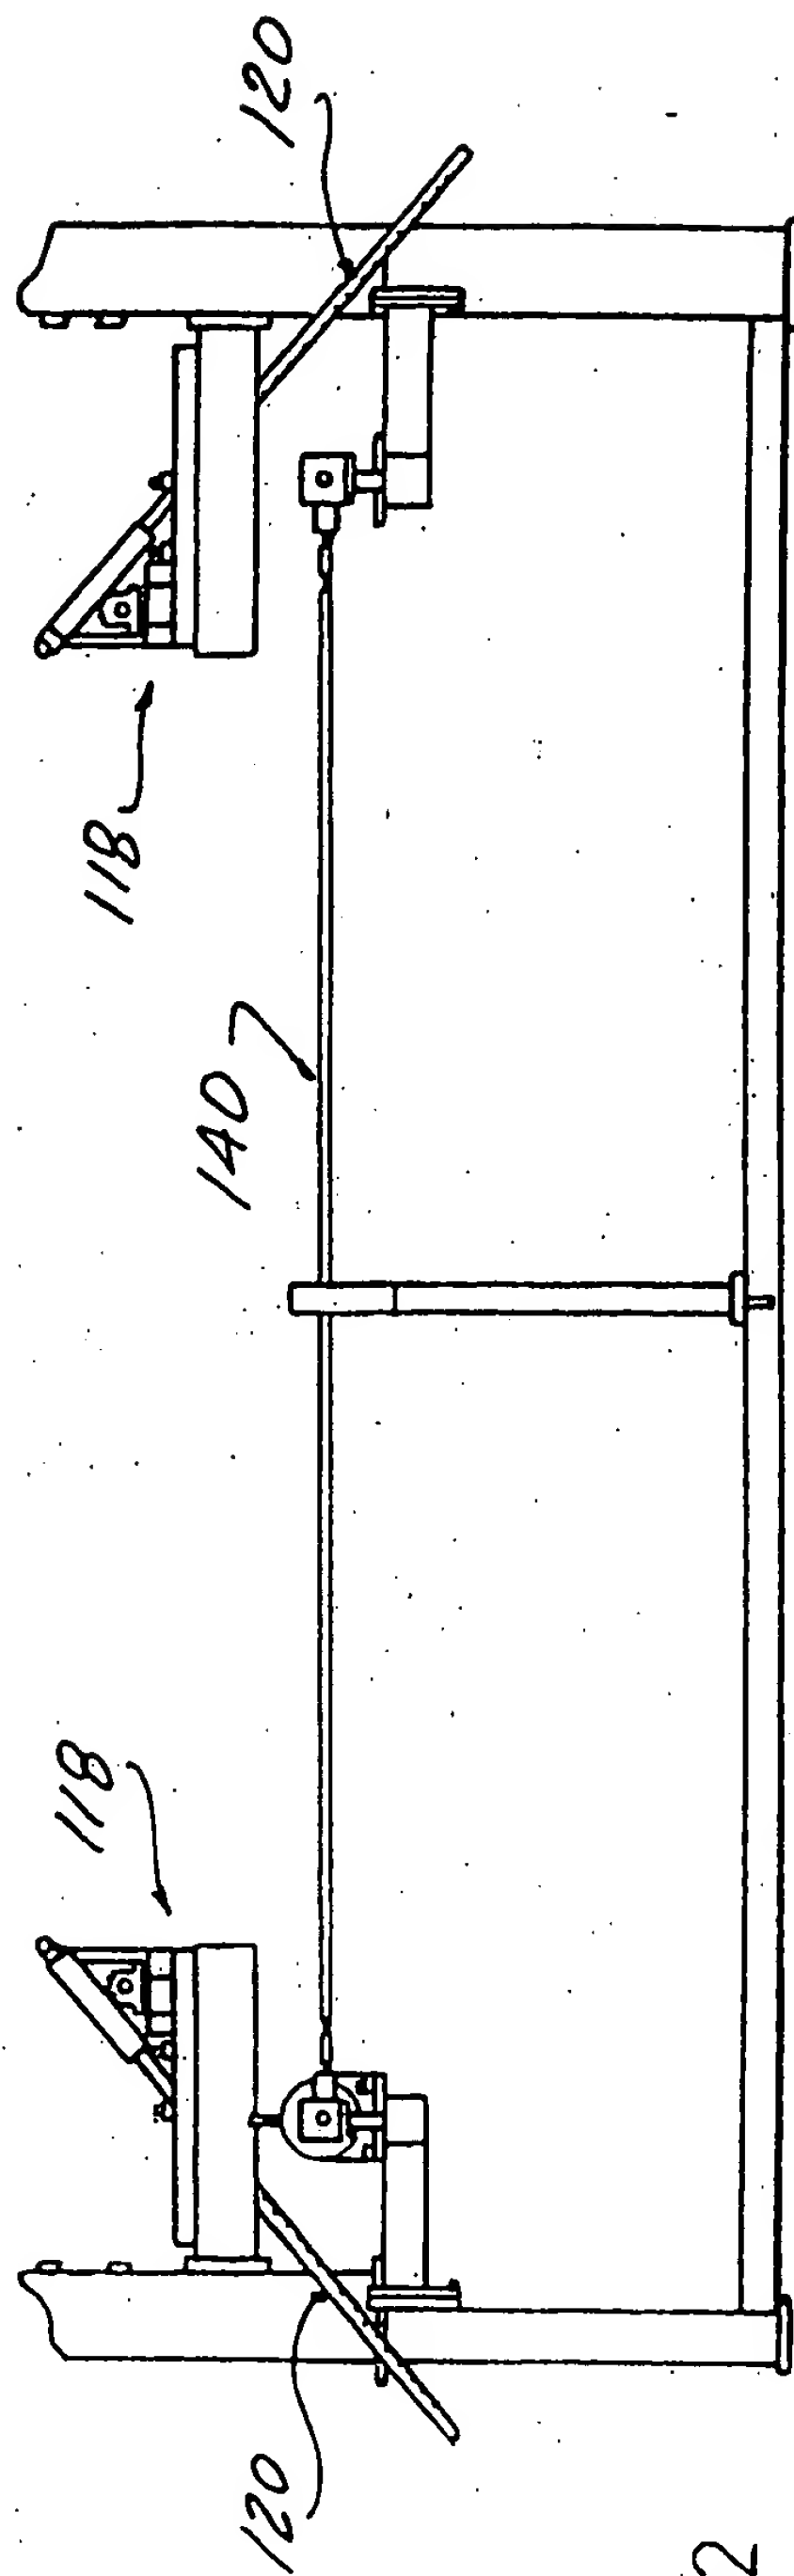
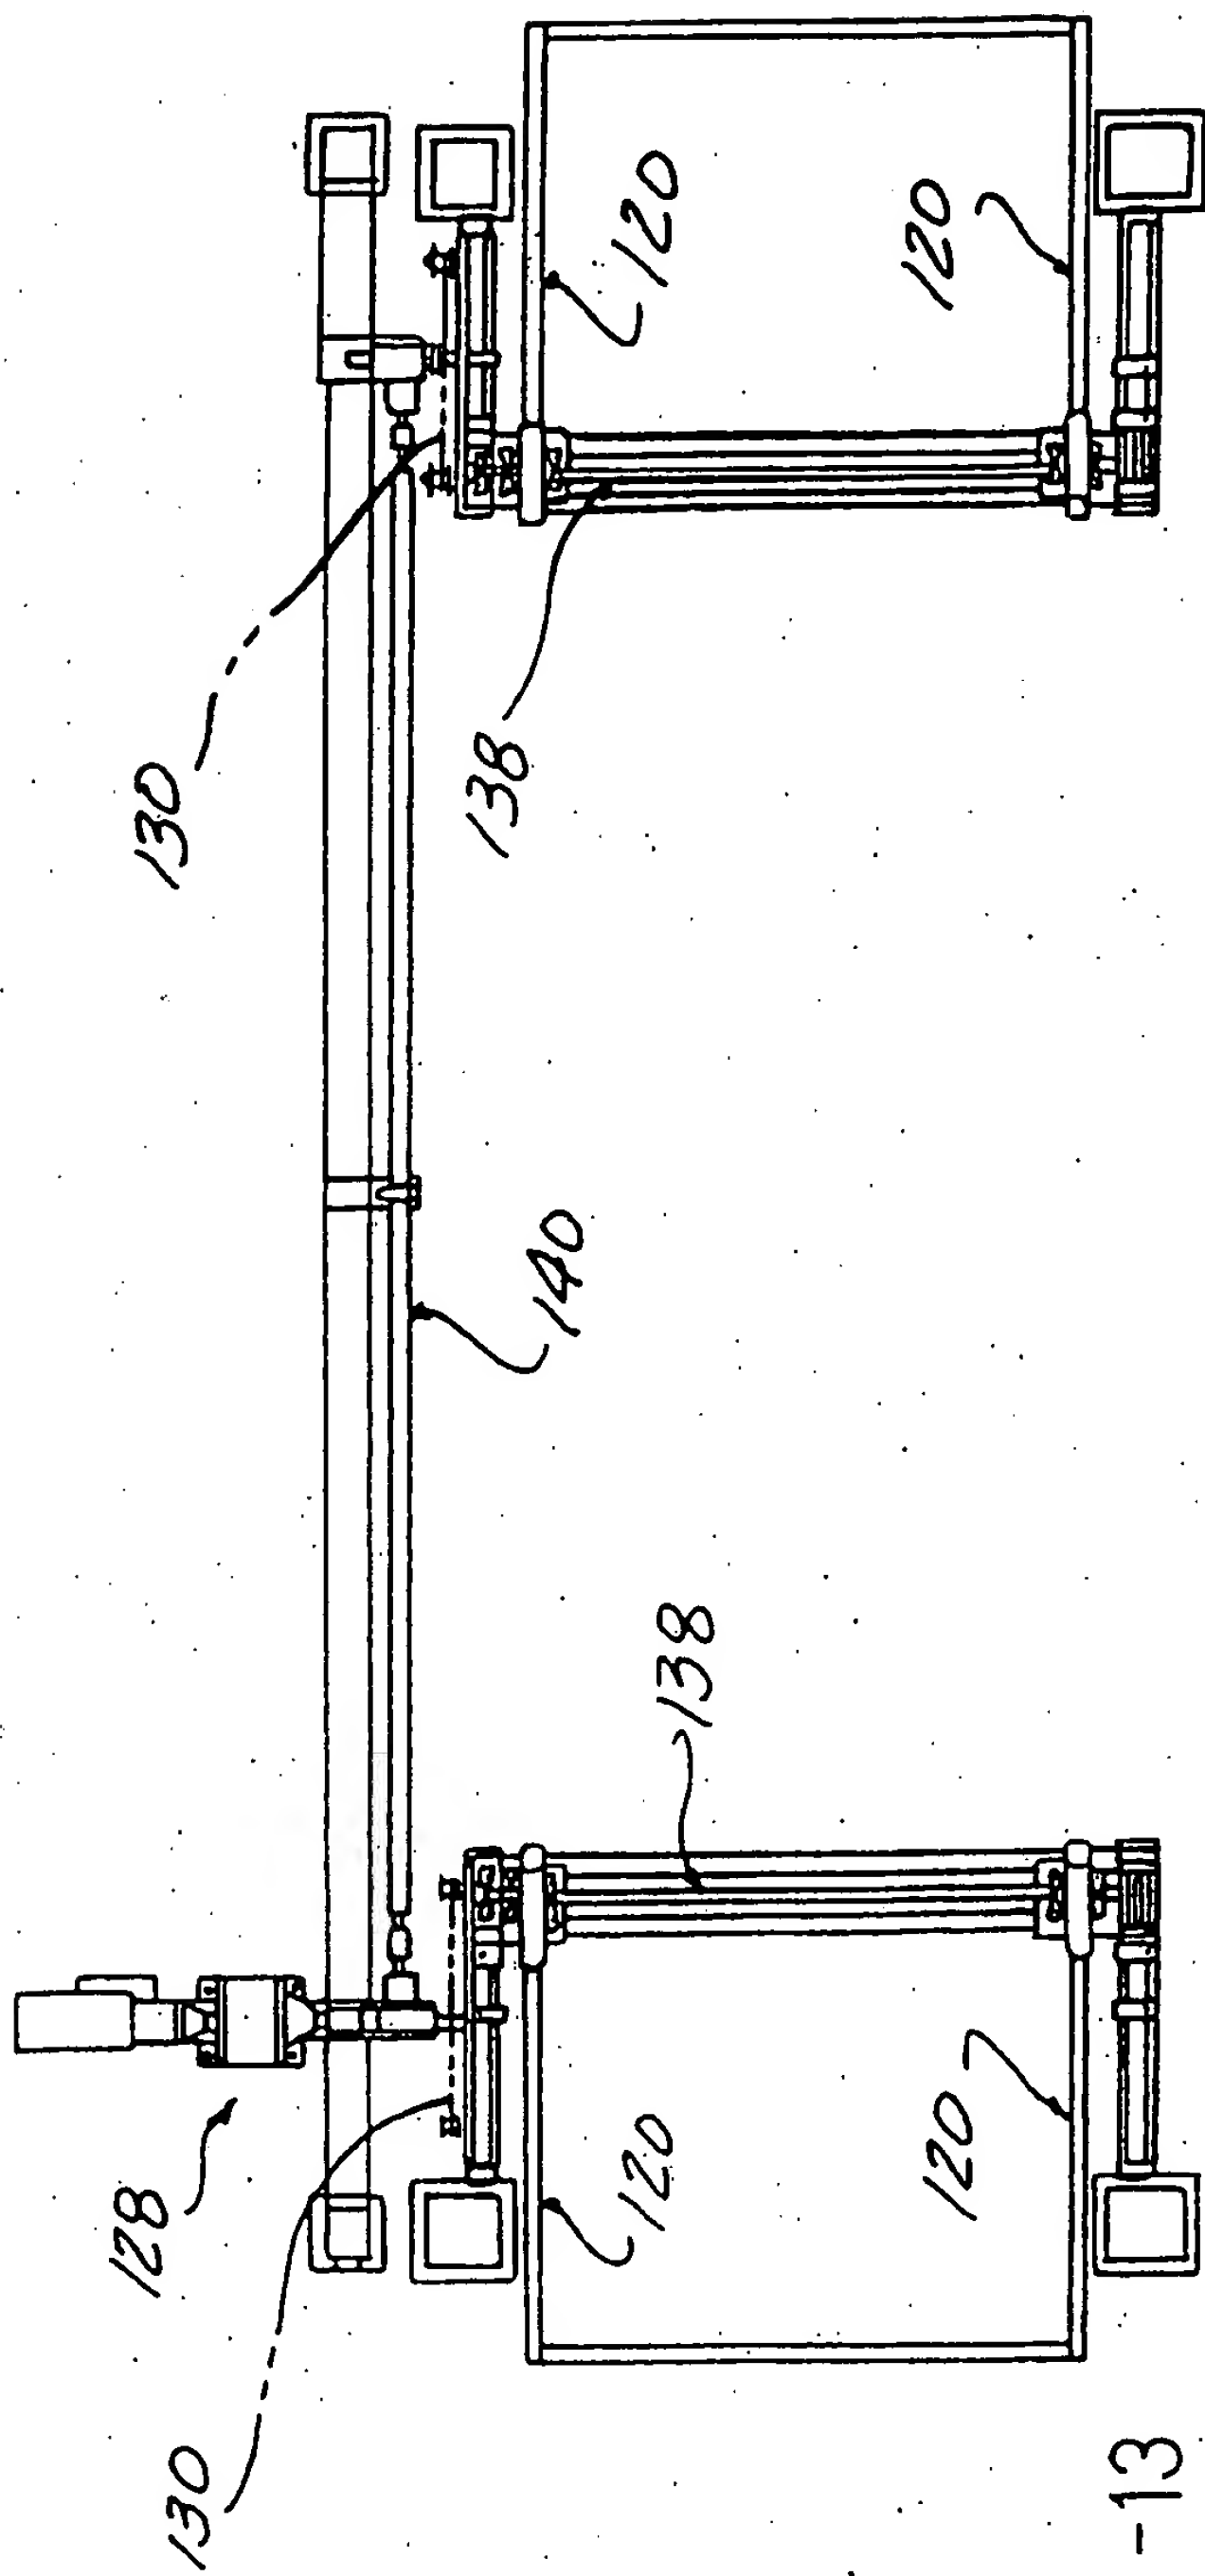


FIG-11



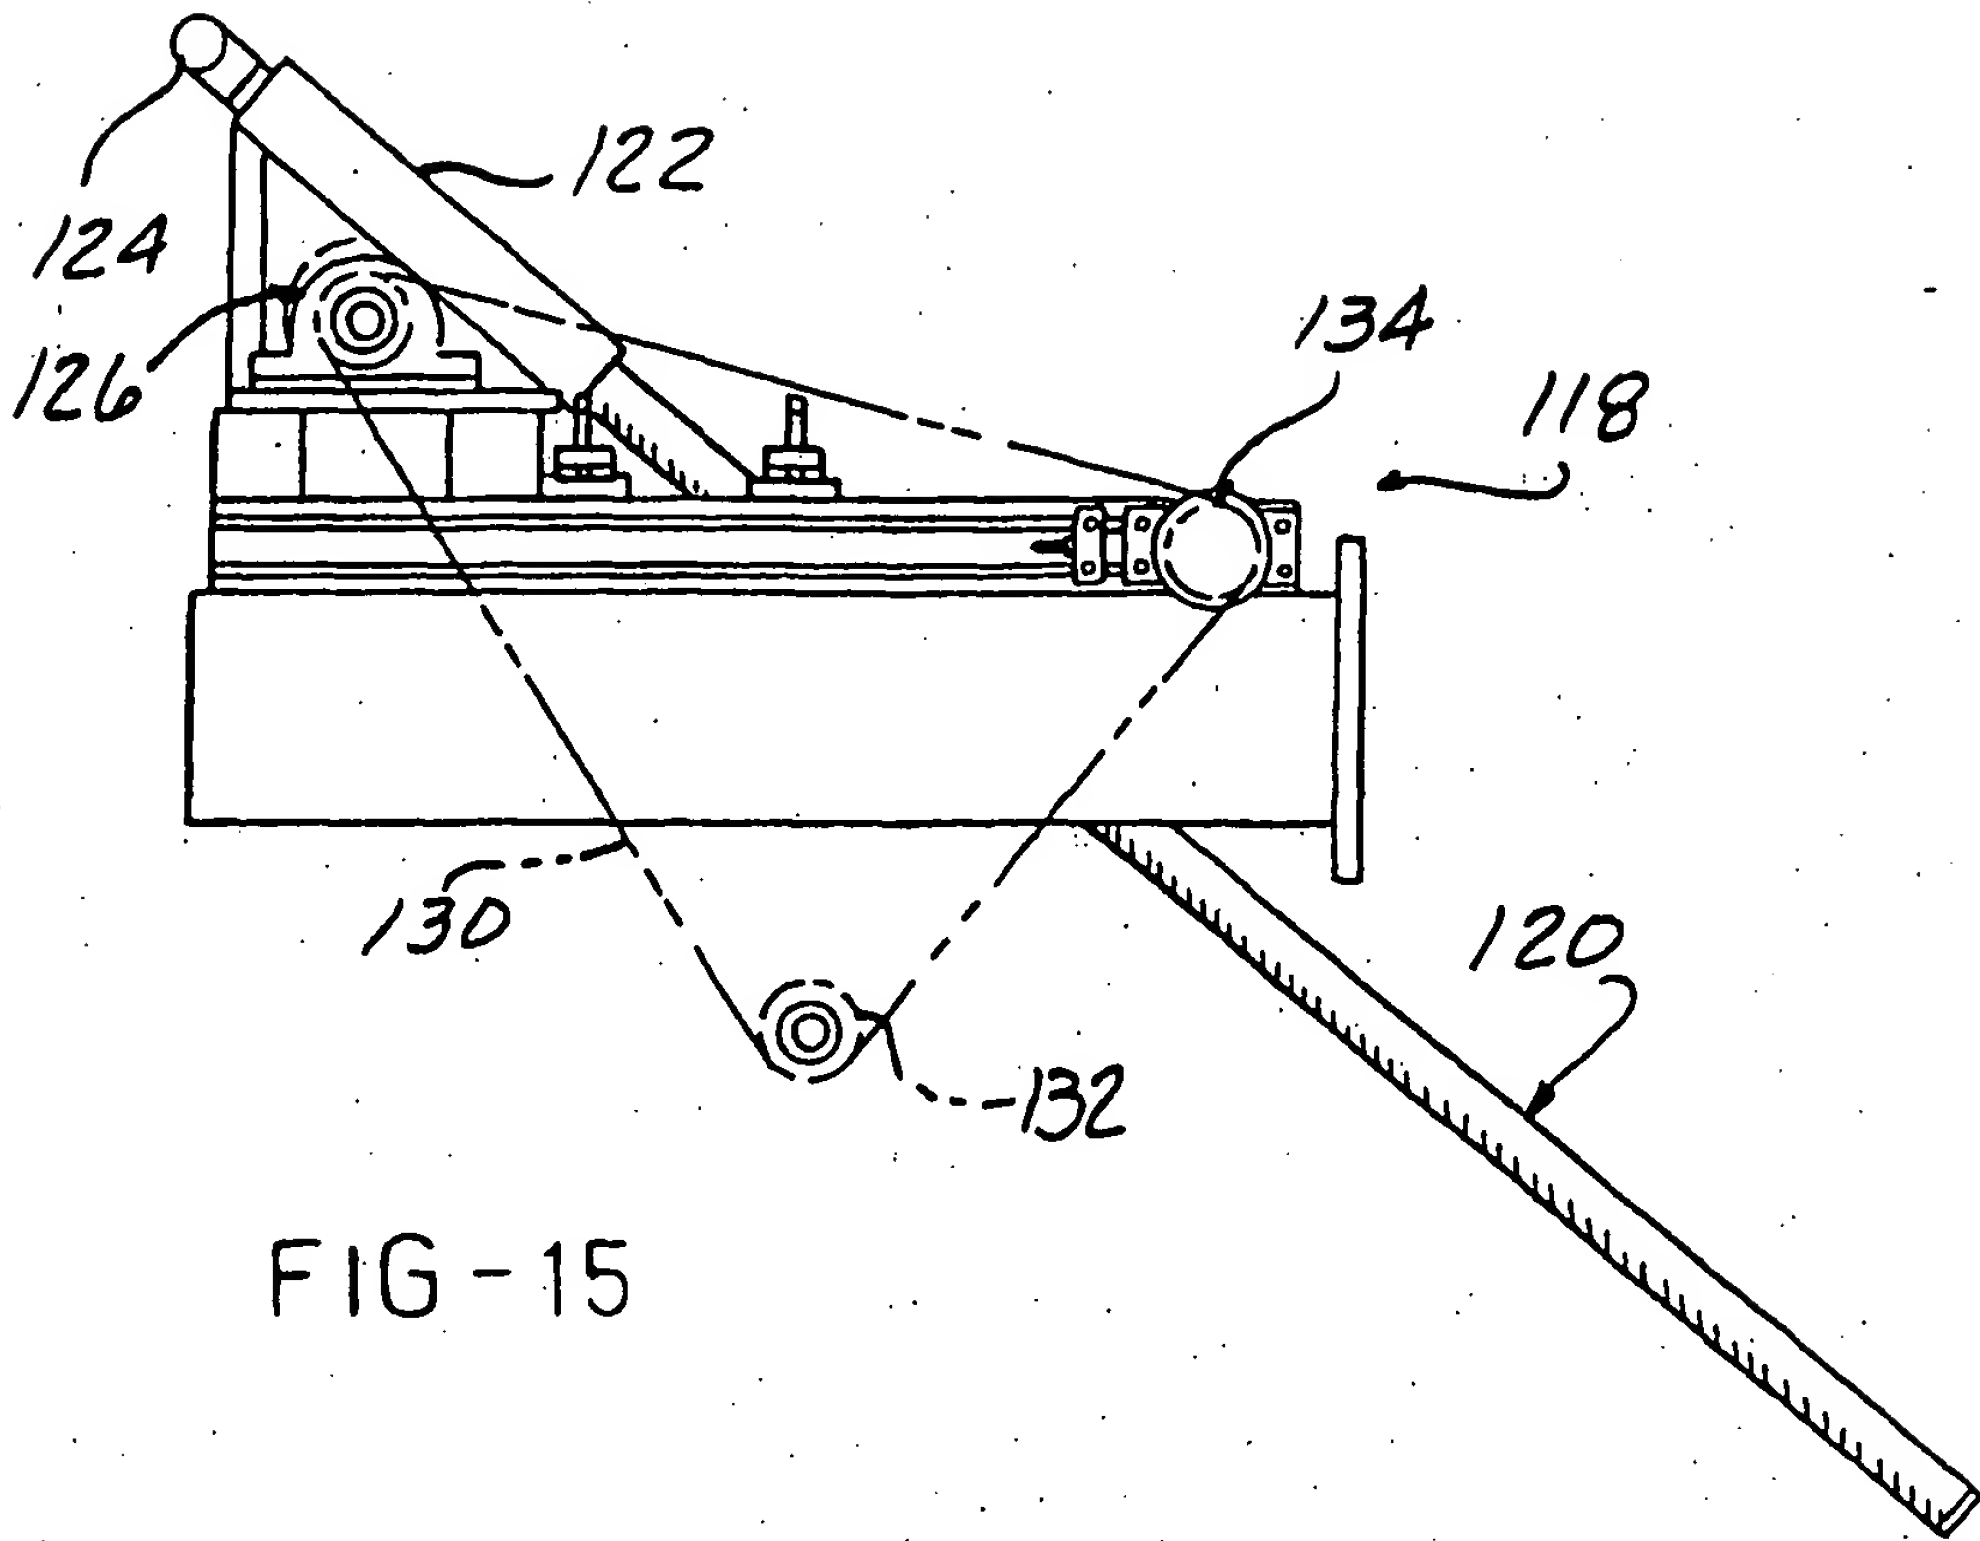


FIG-15

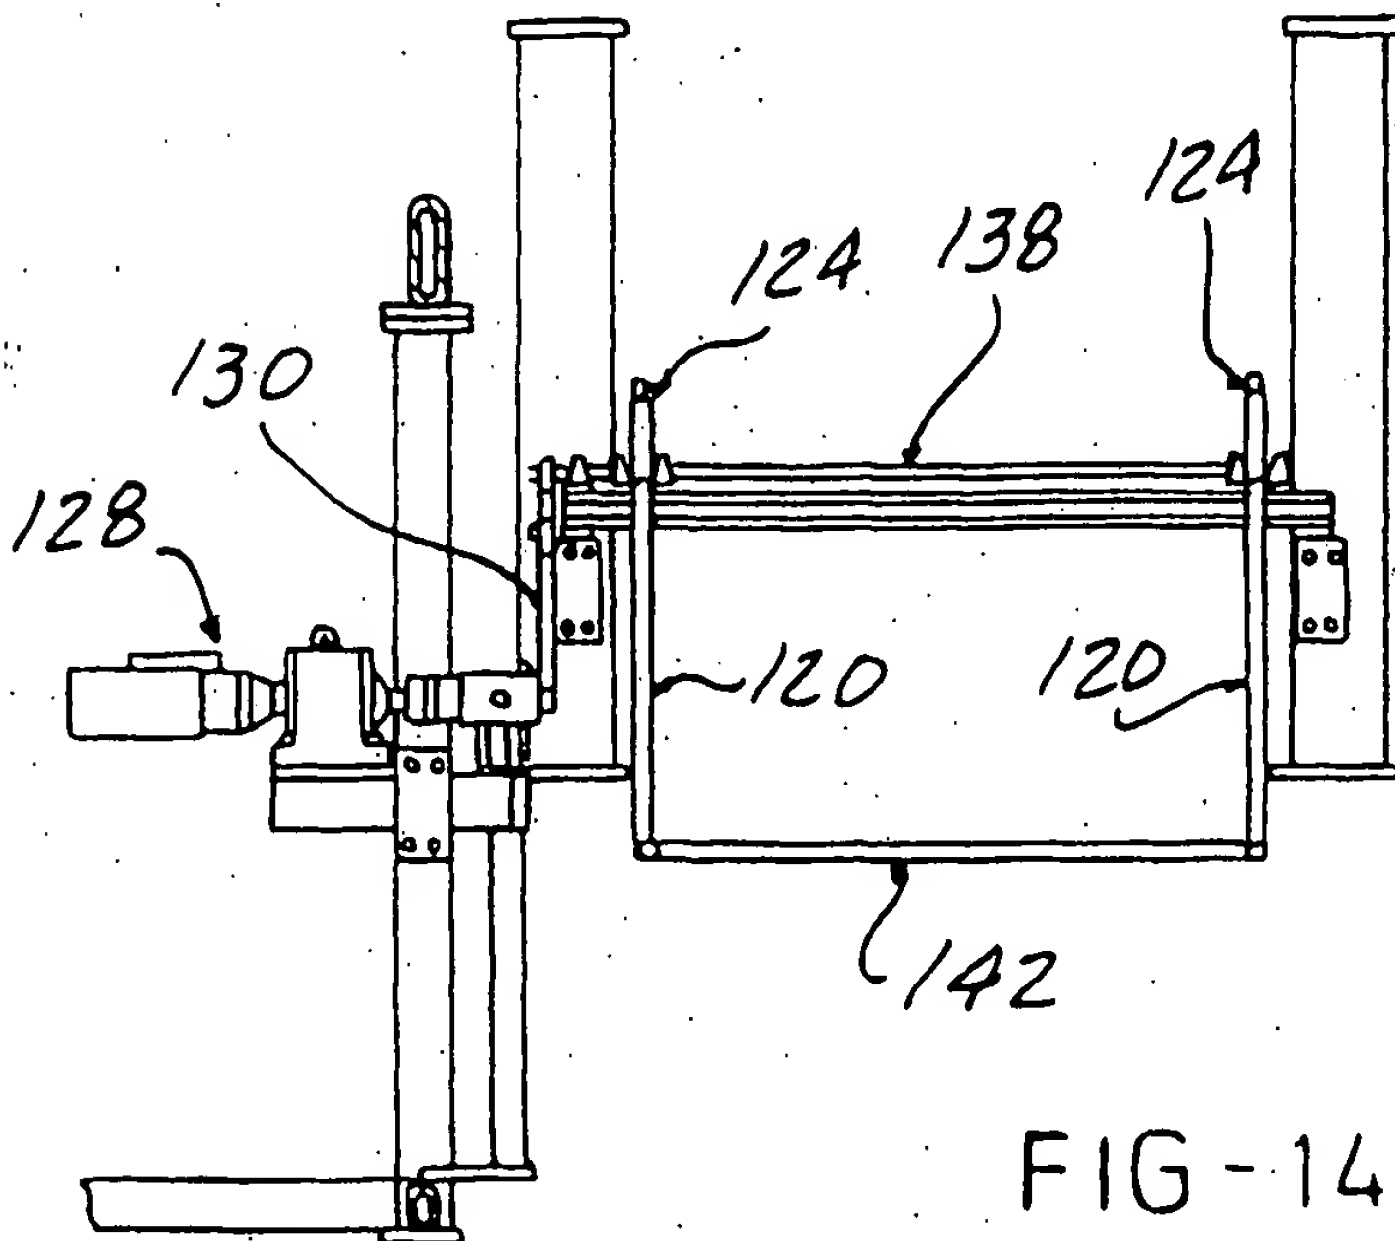


FIG-14

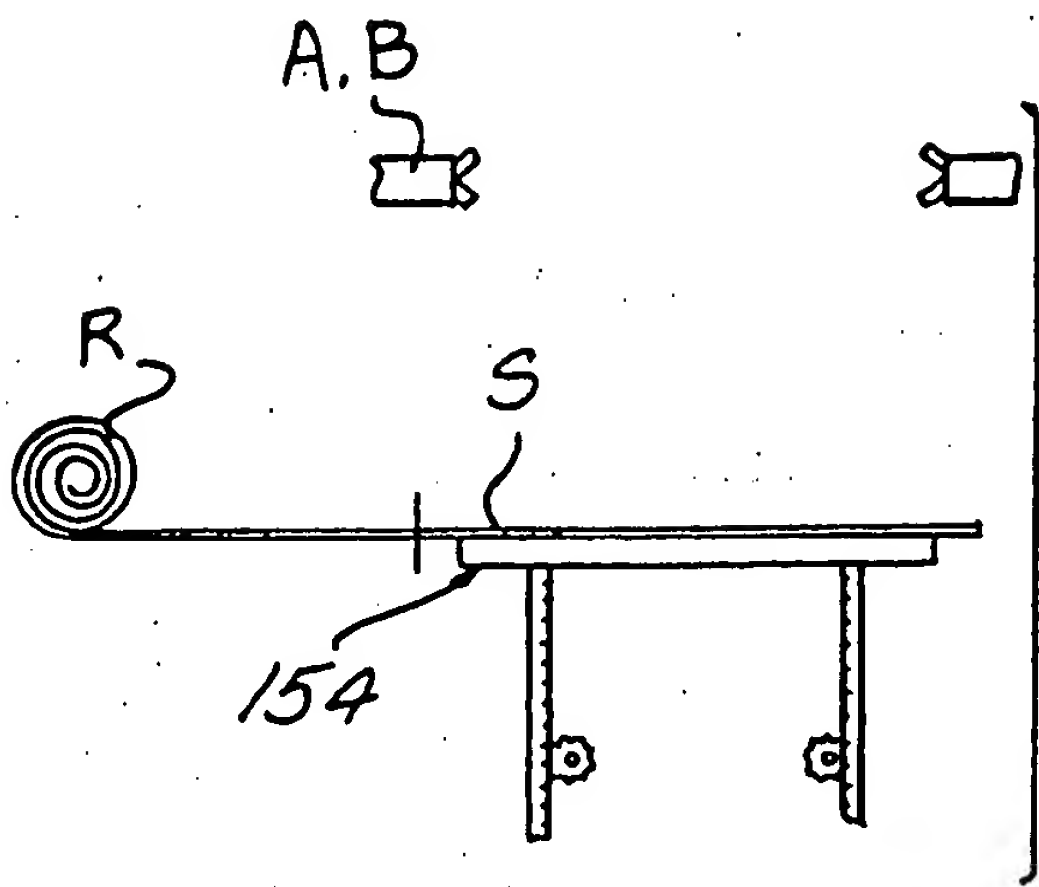


FIG - 18A

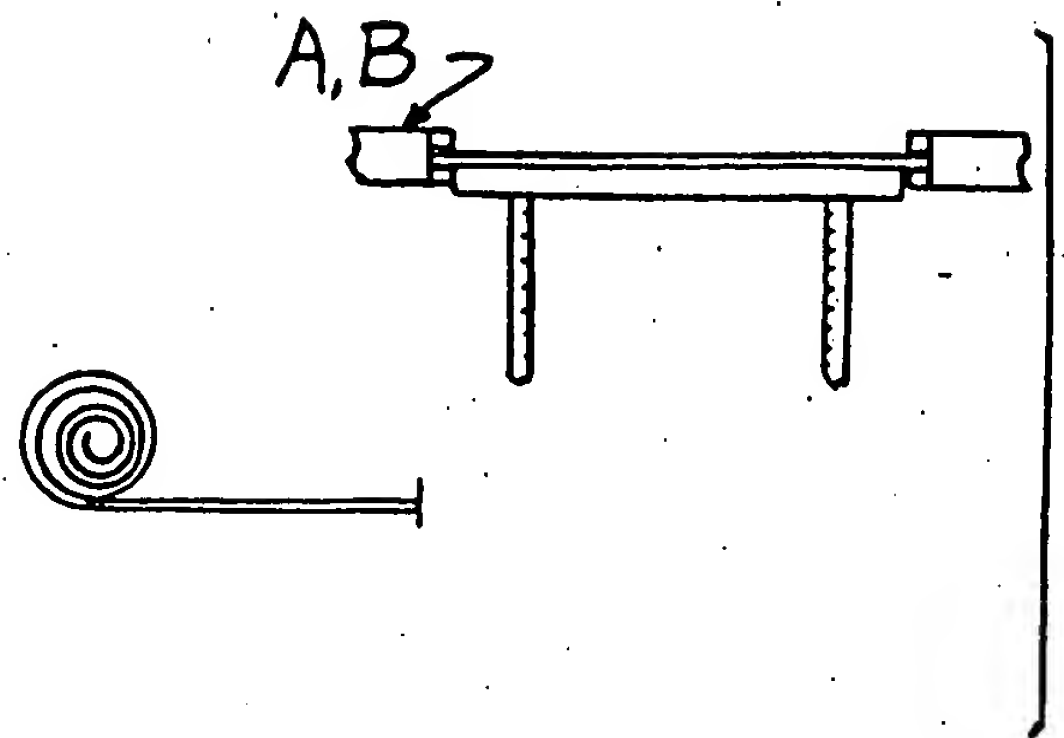


FIG - 18B

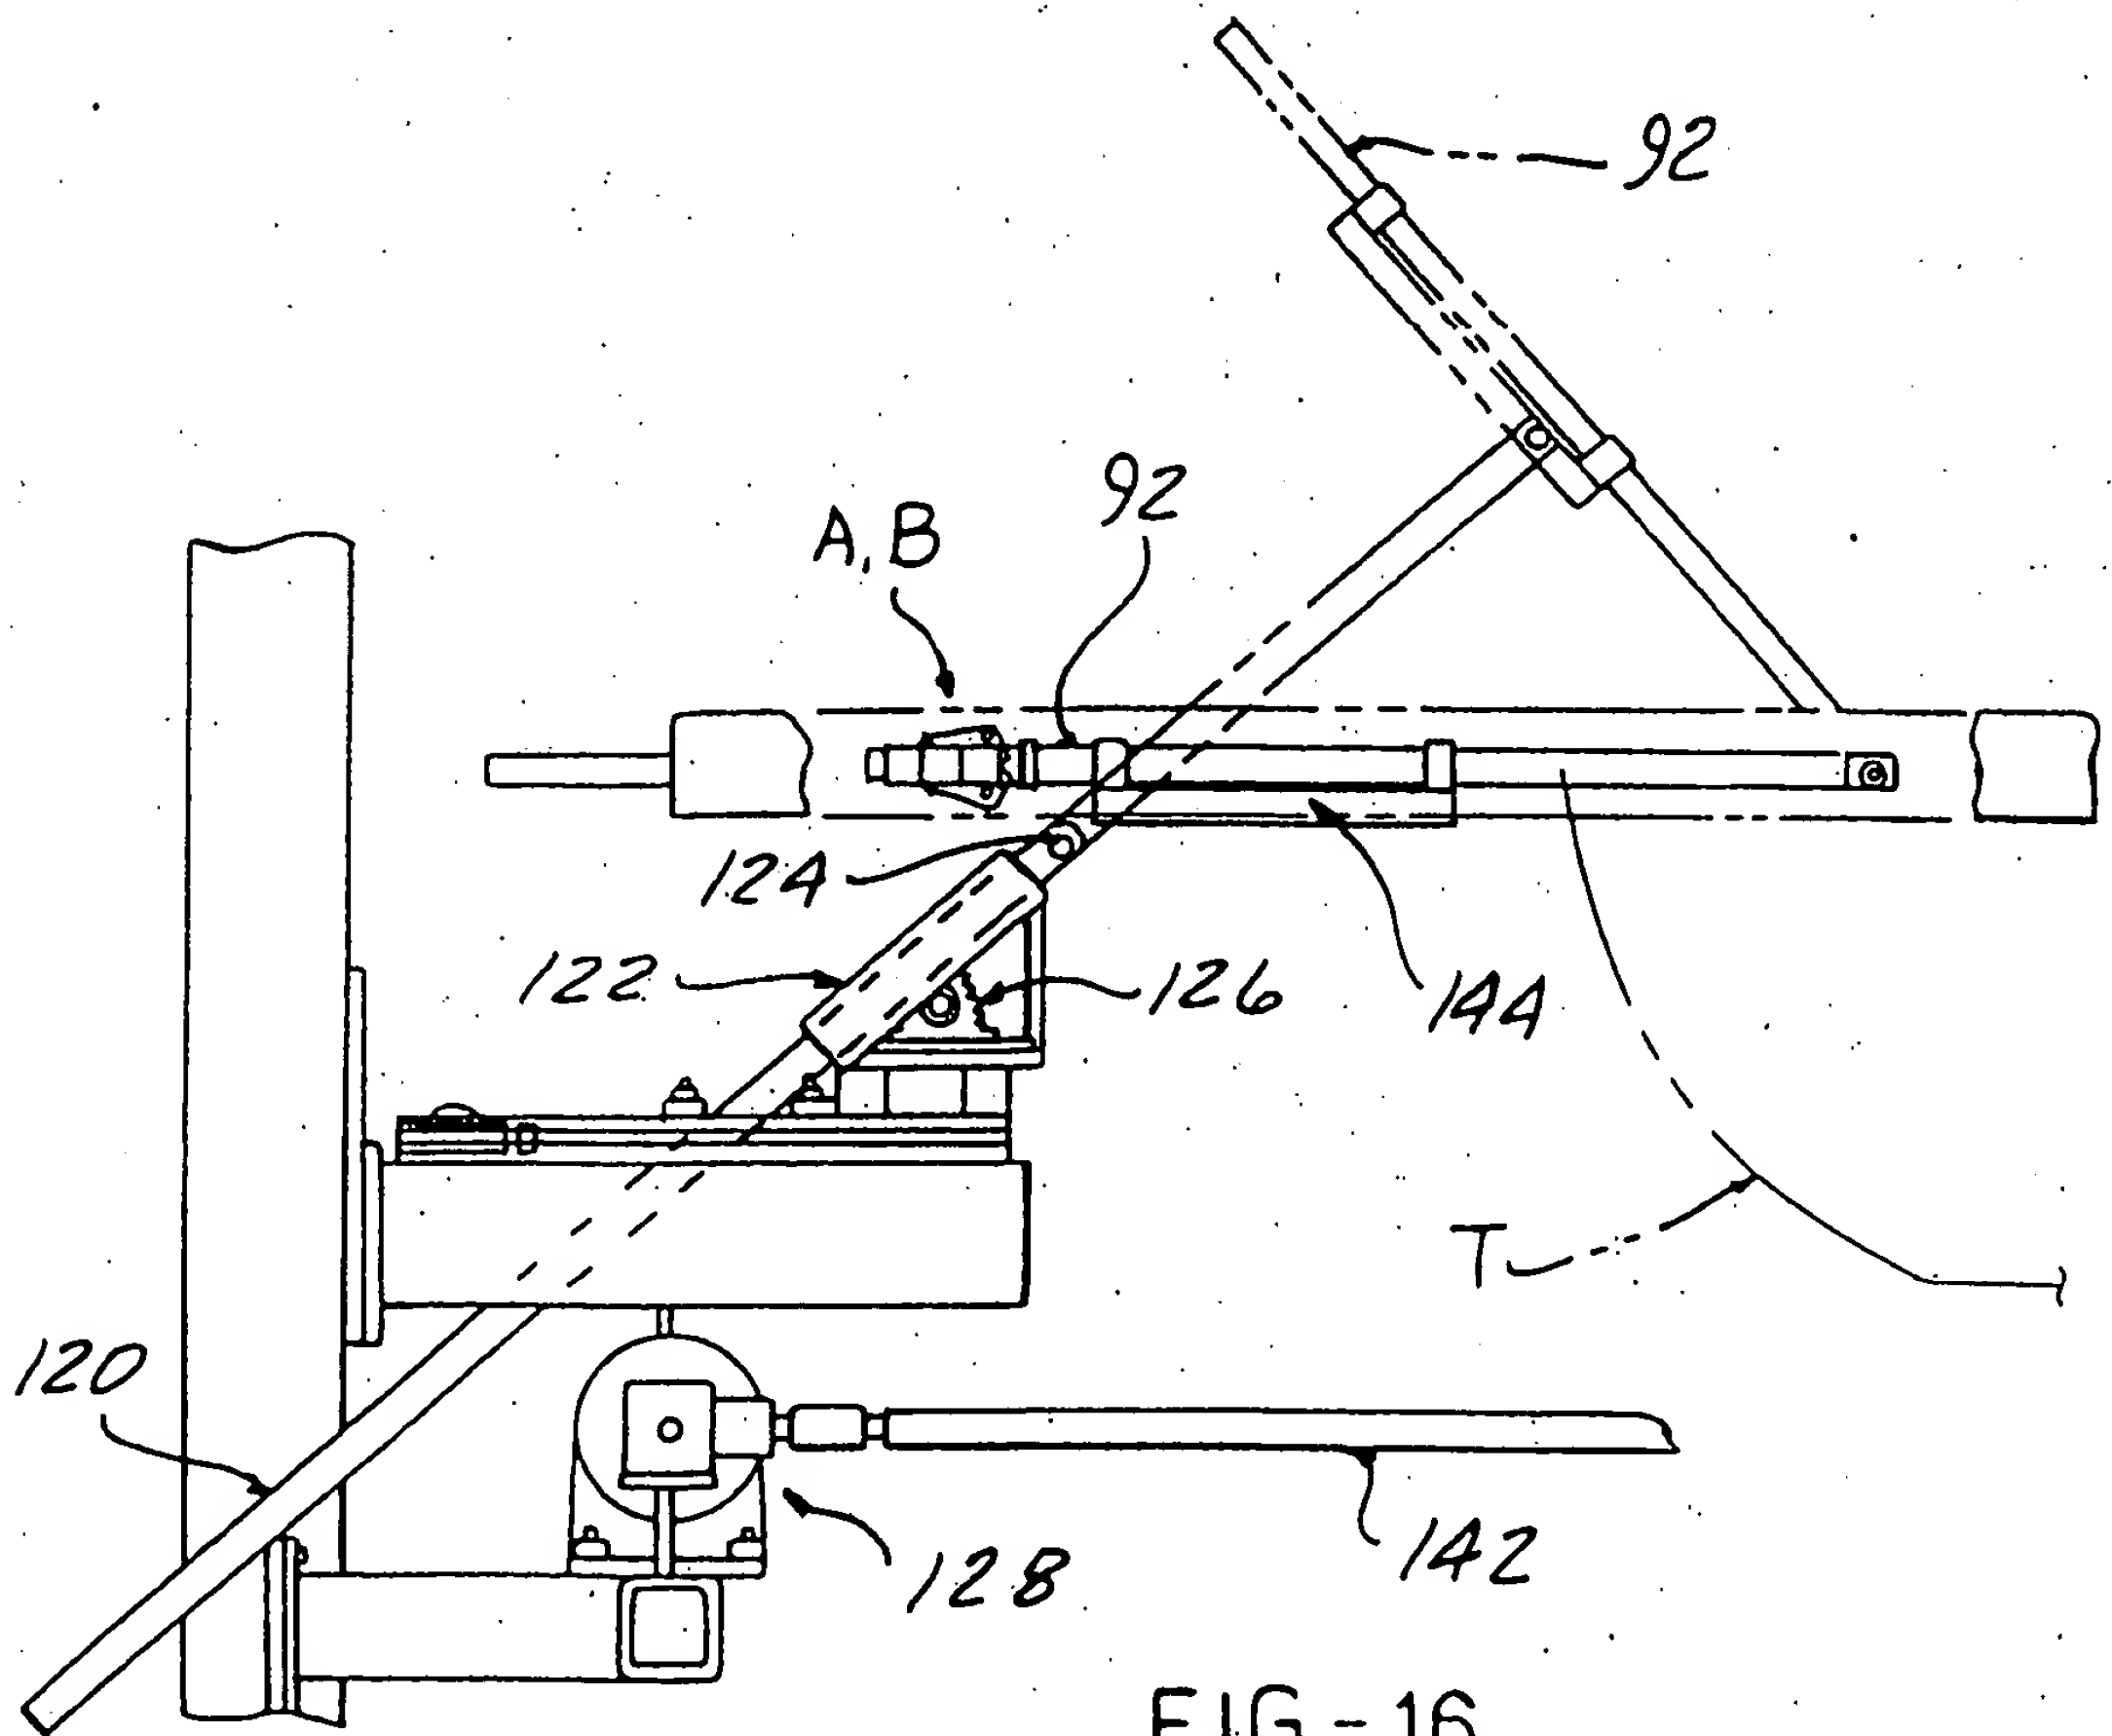
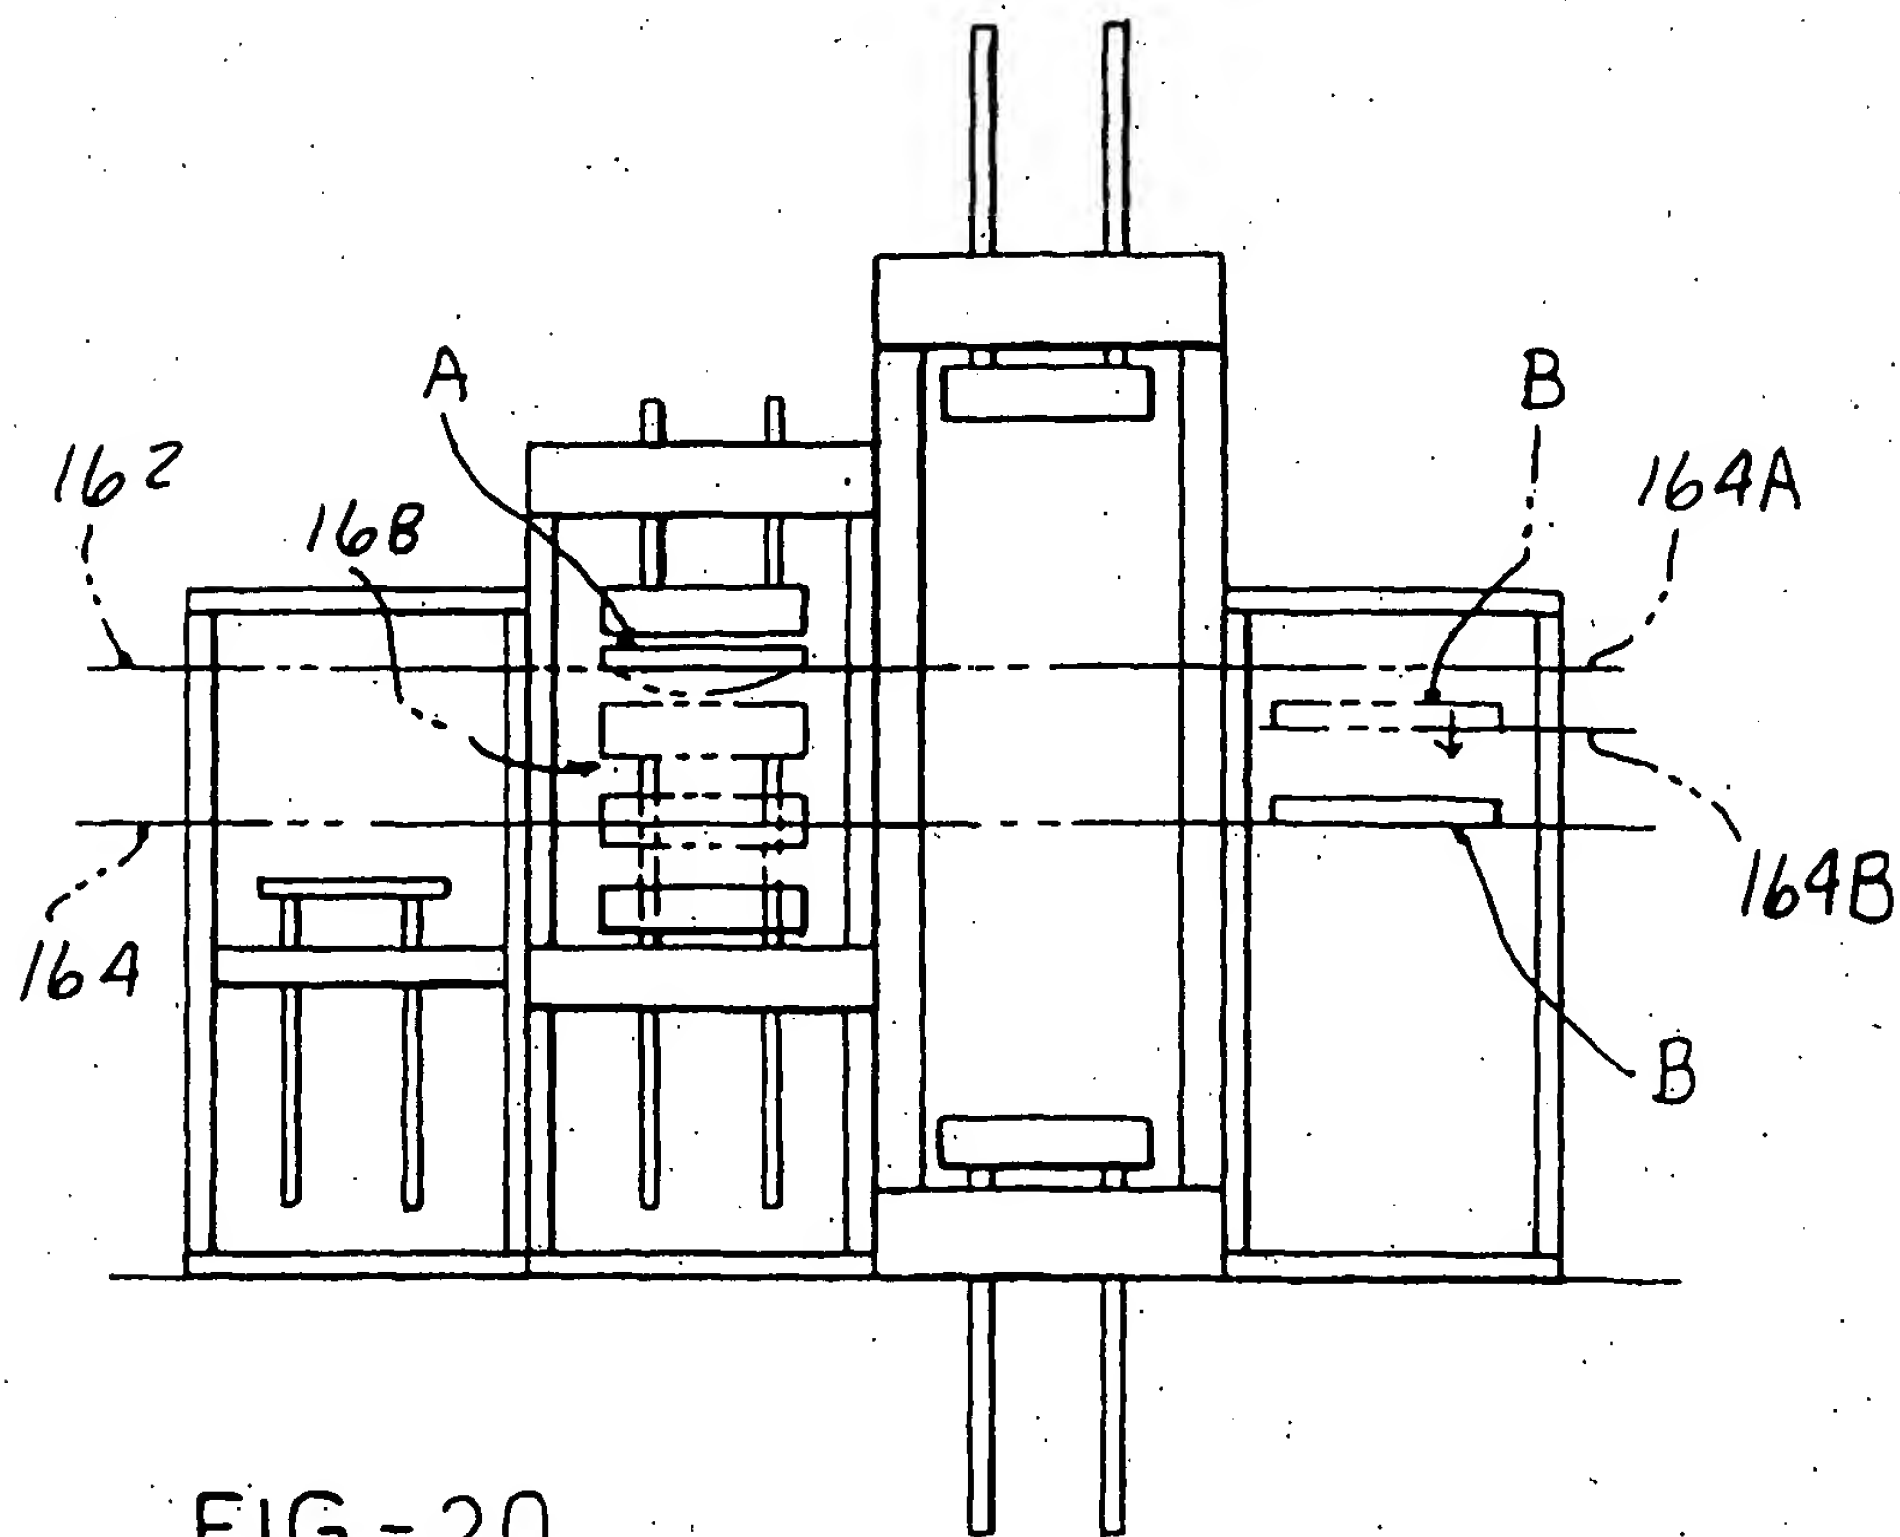
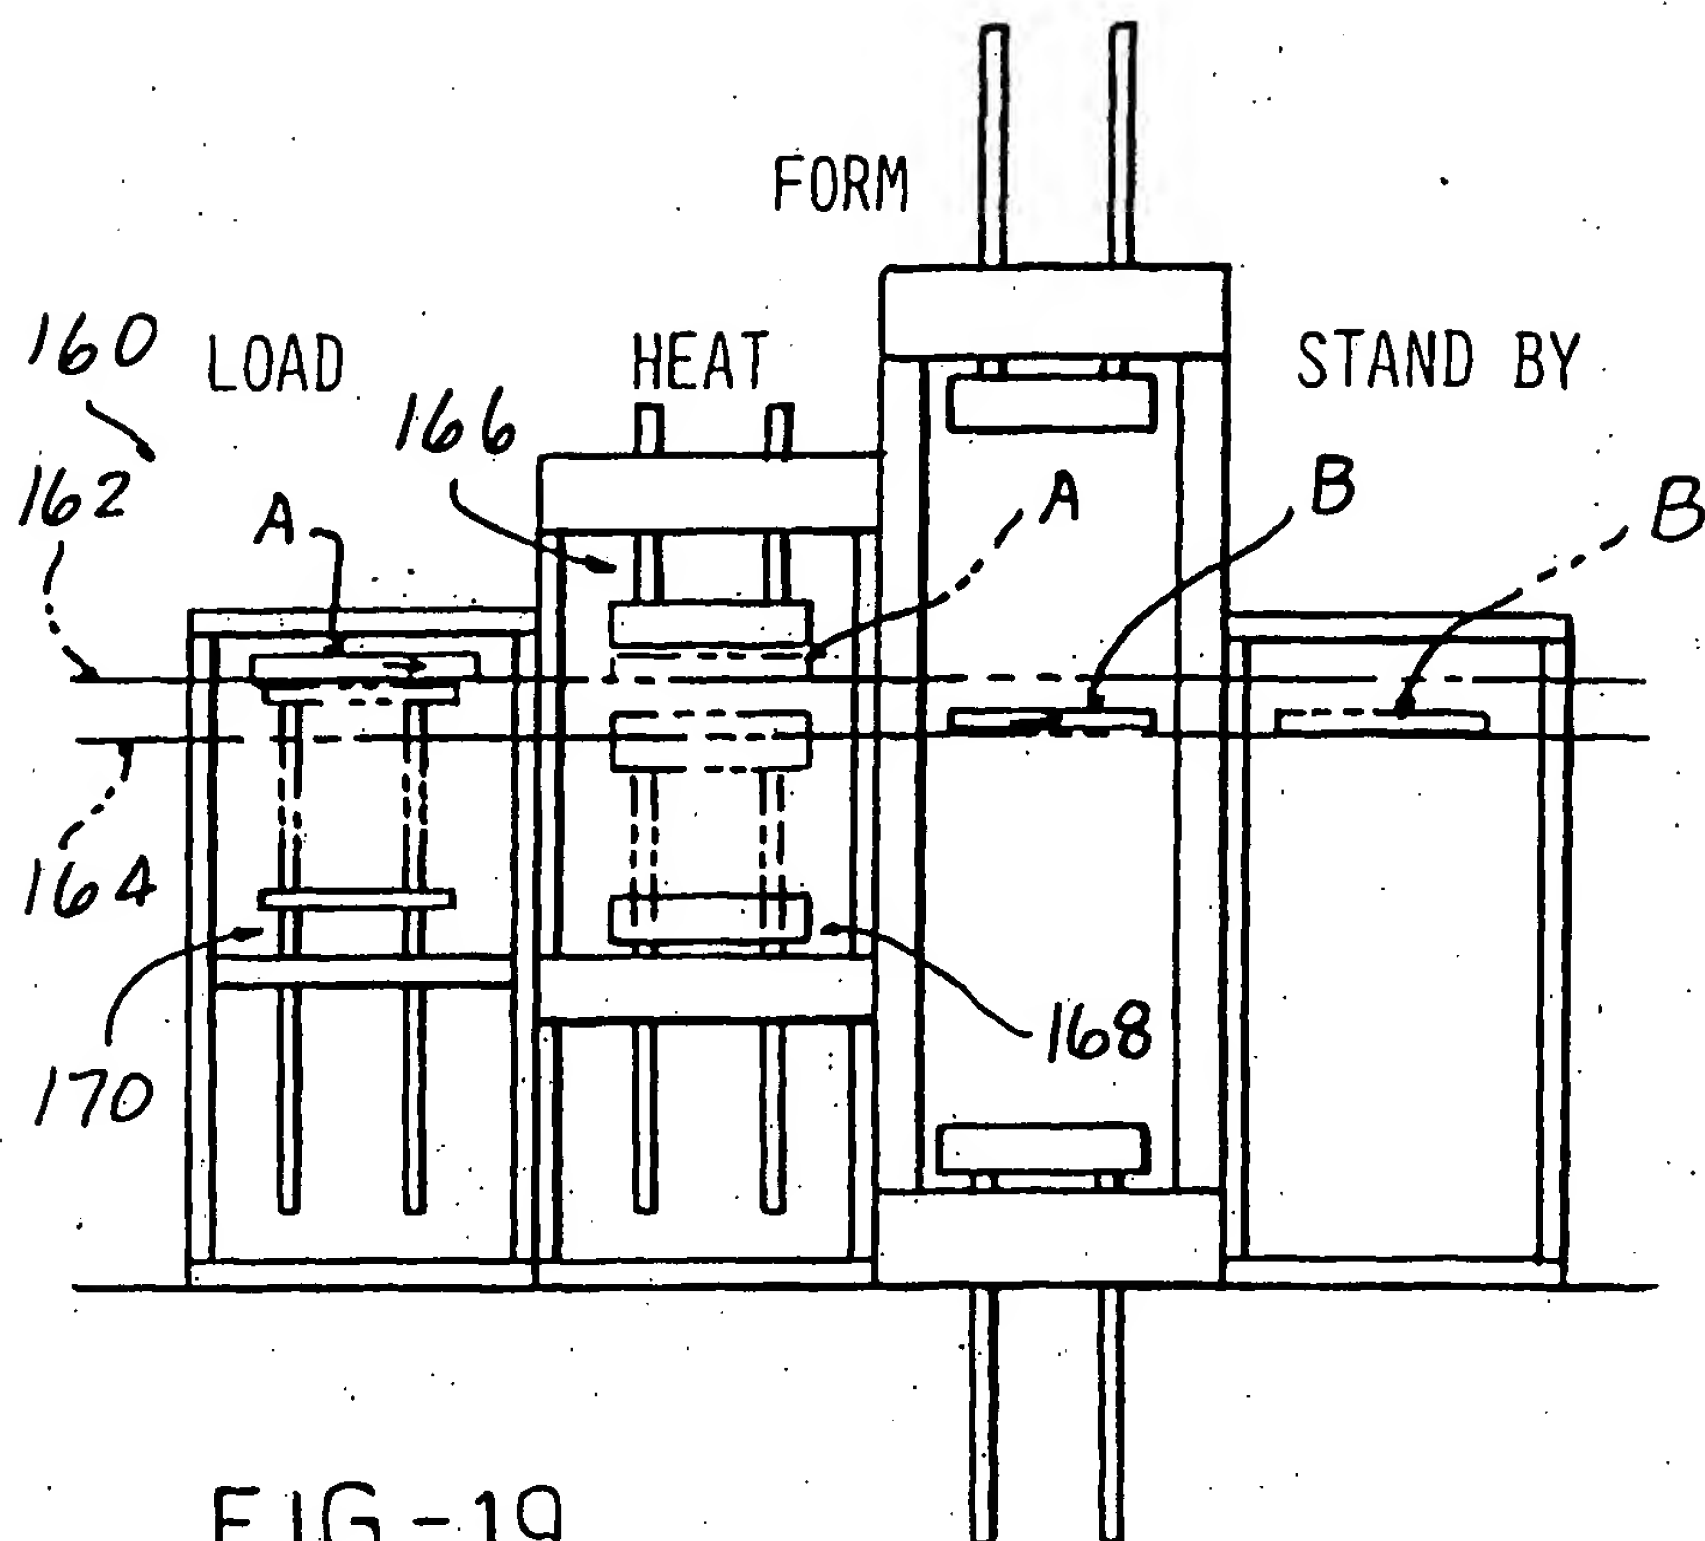
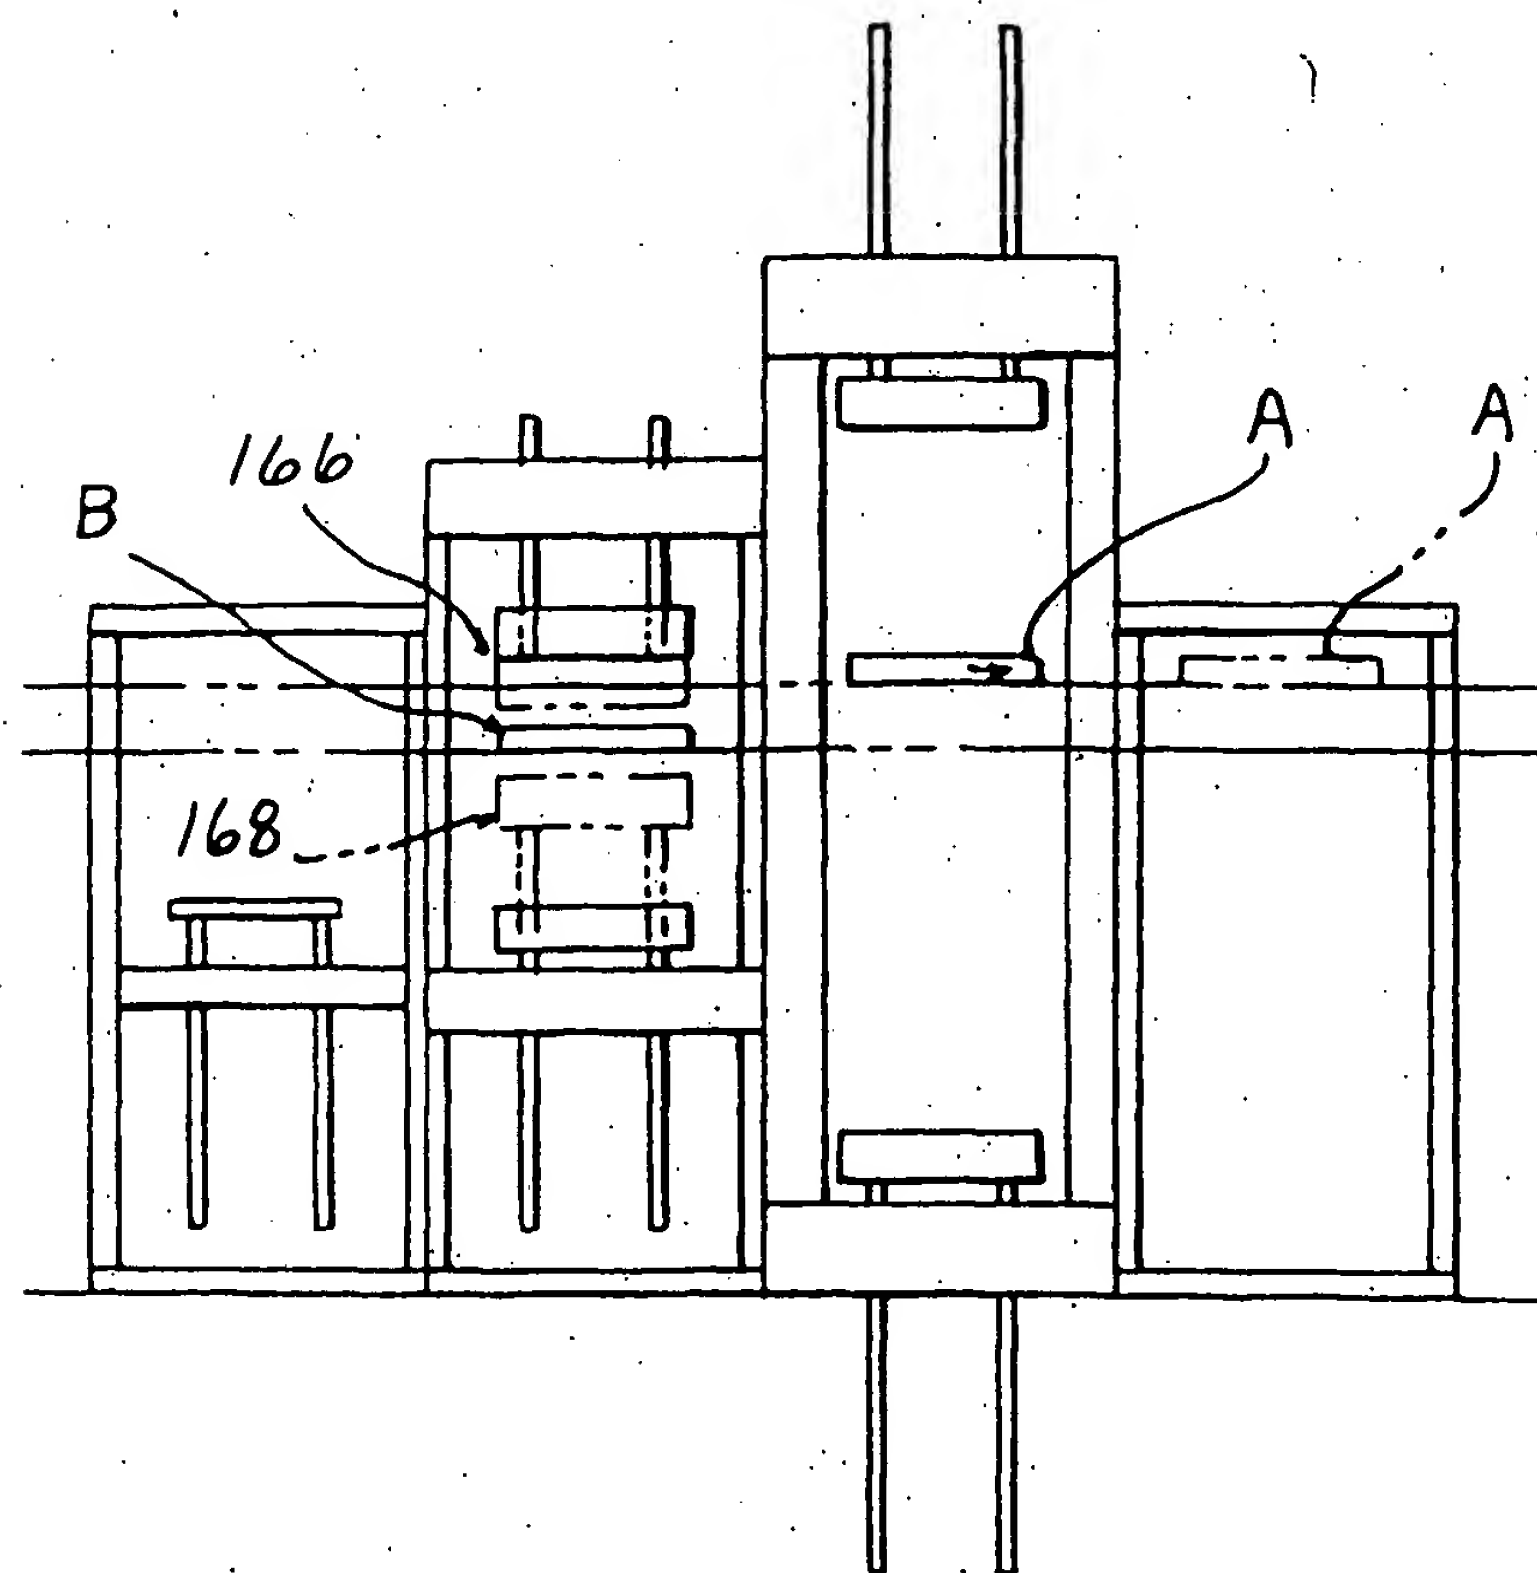
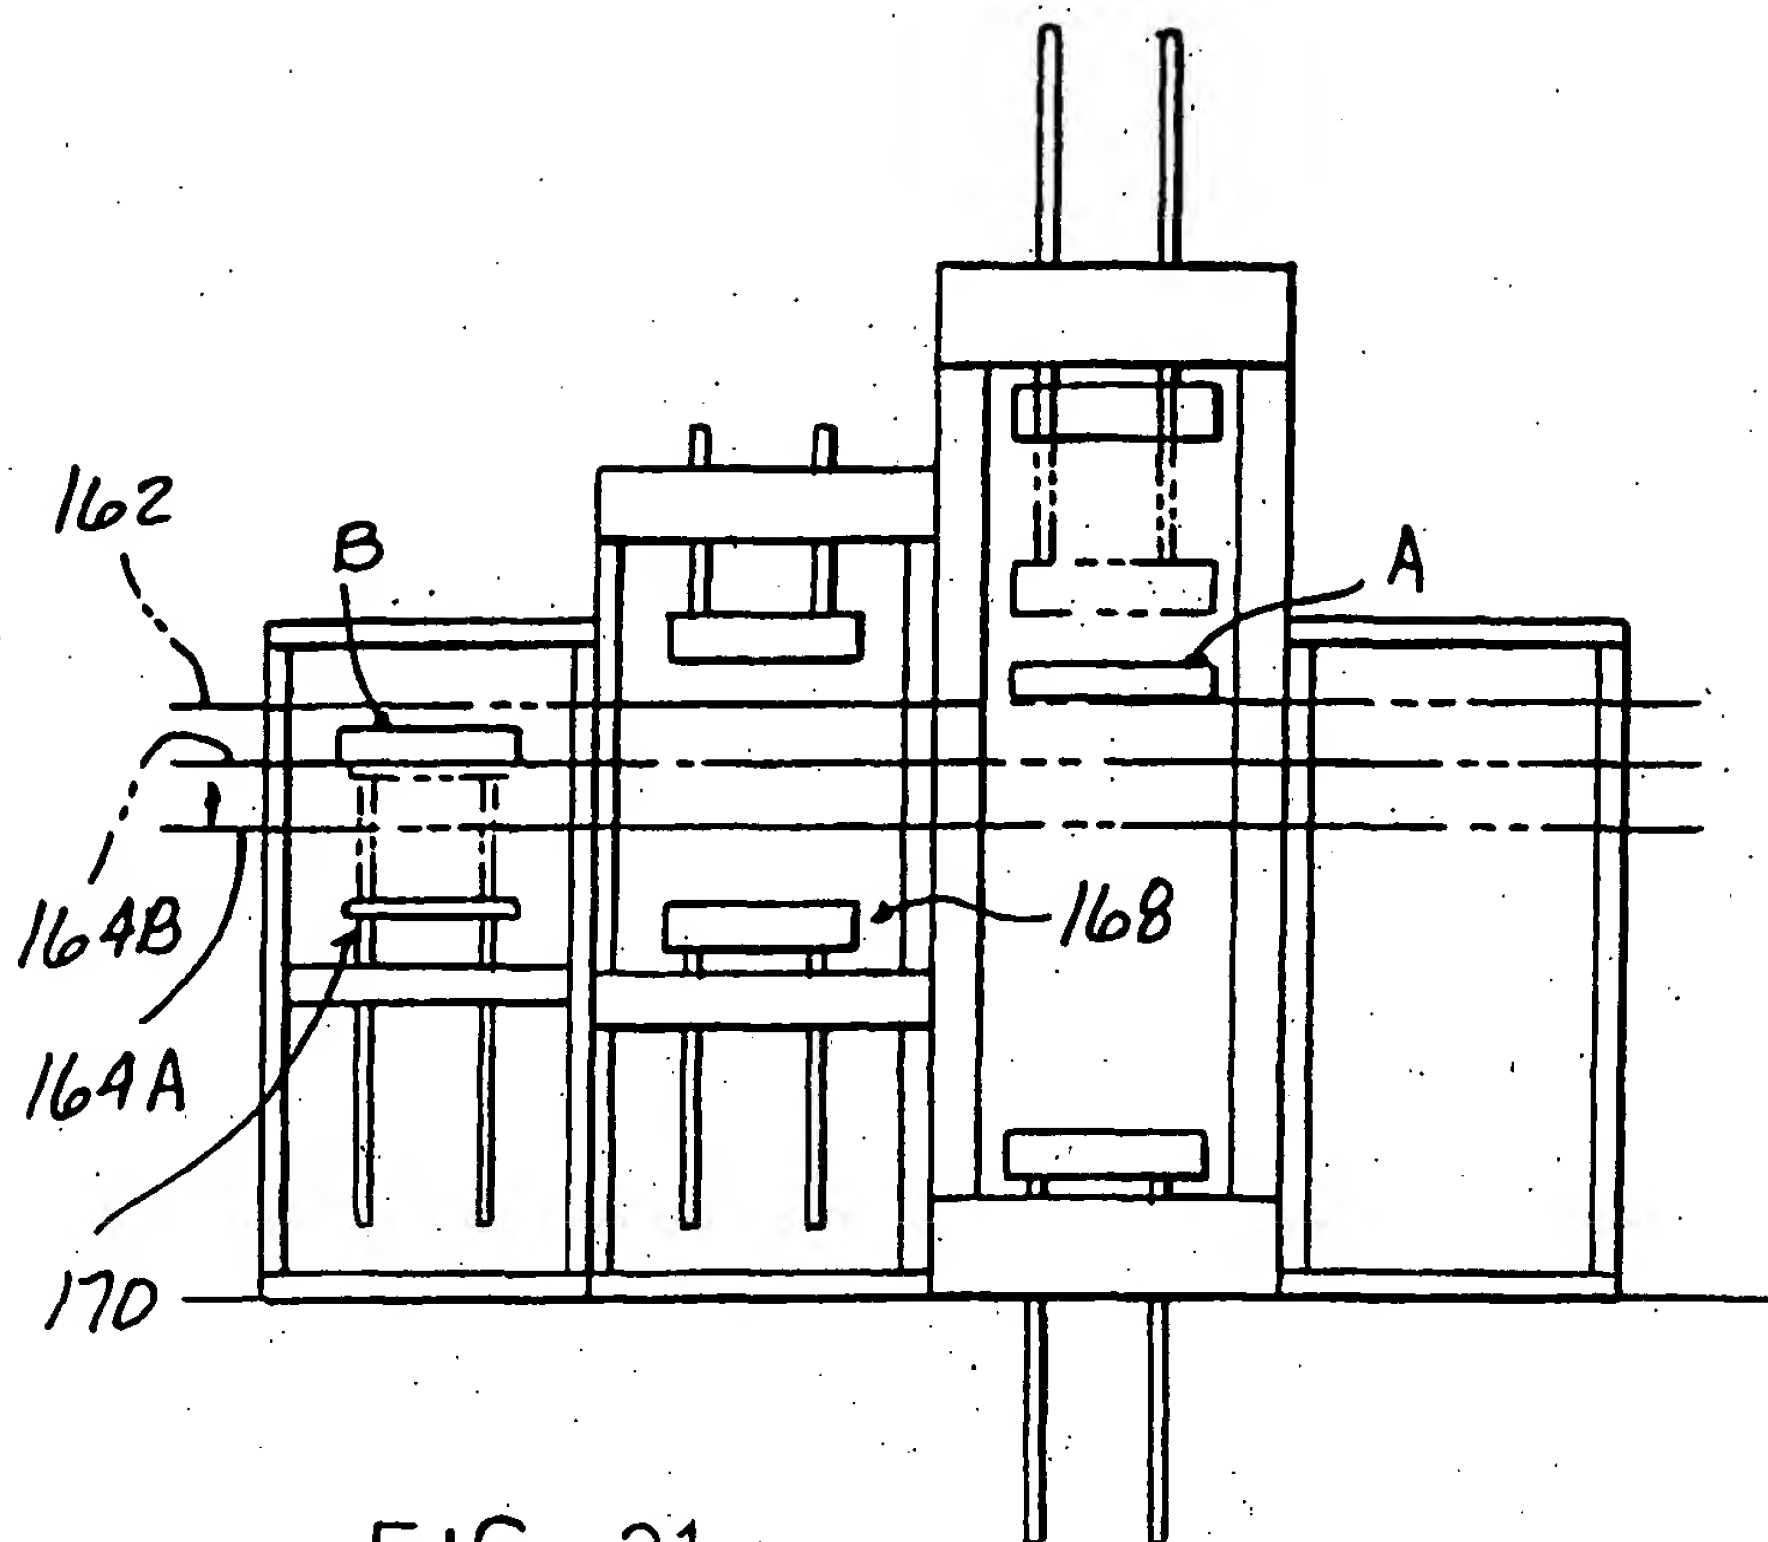


FIG - 16





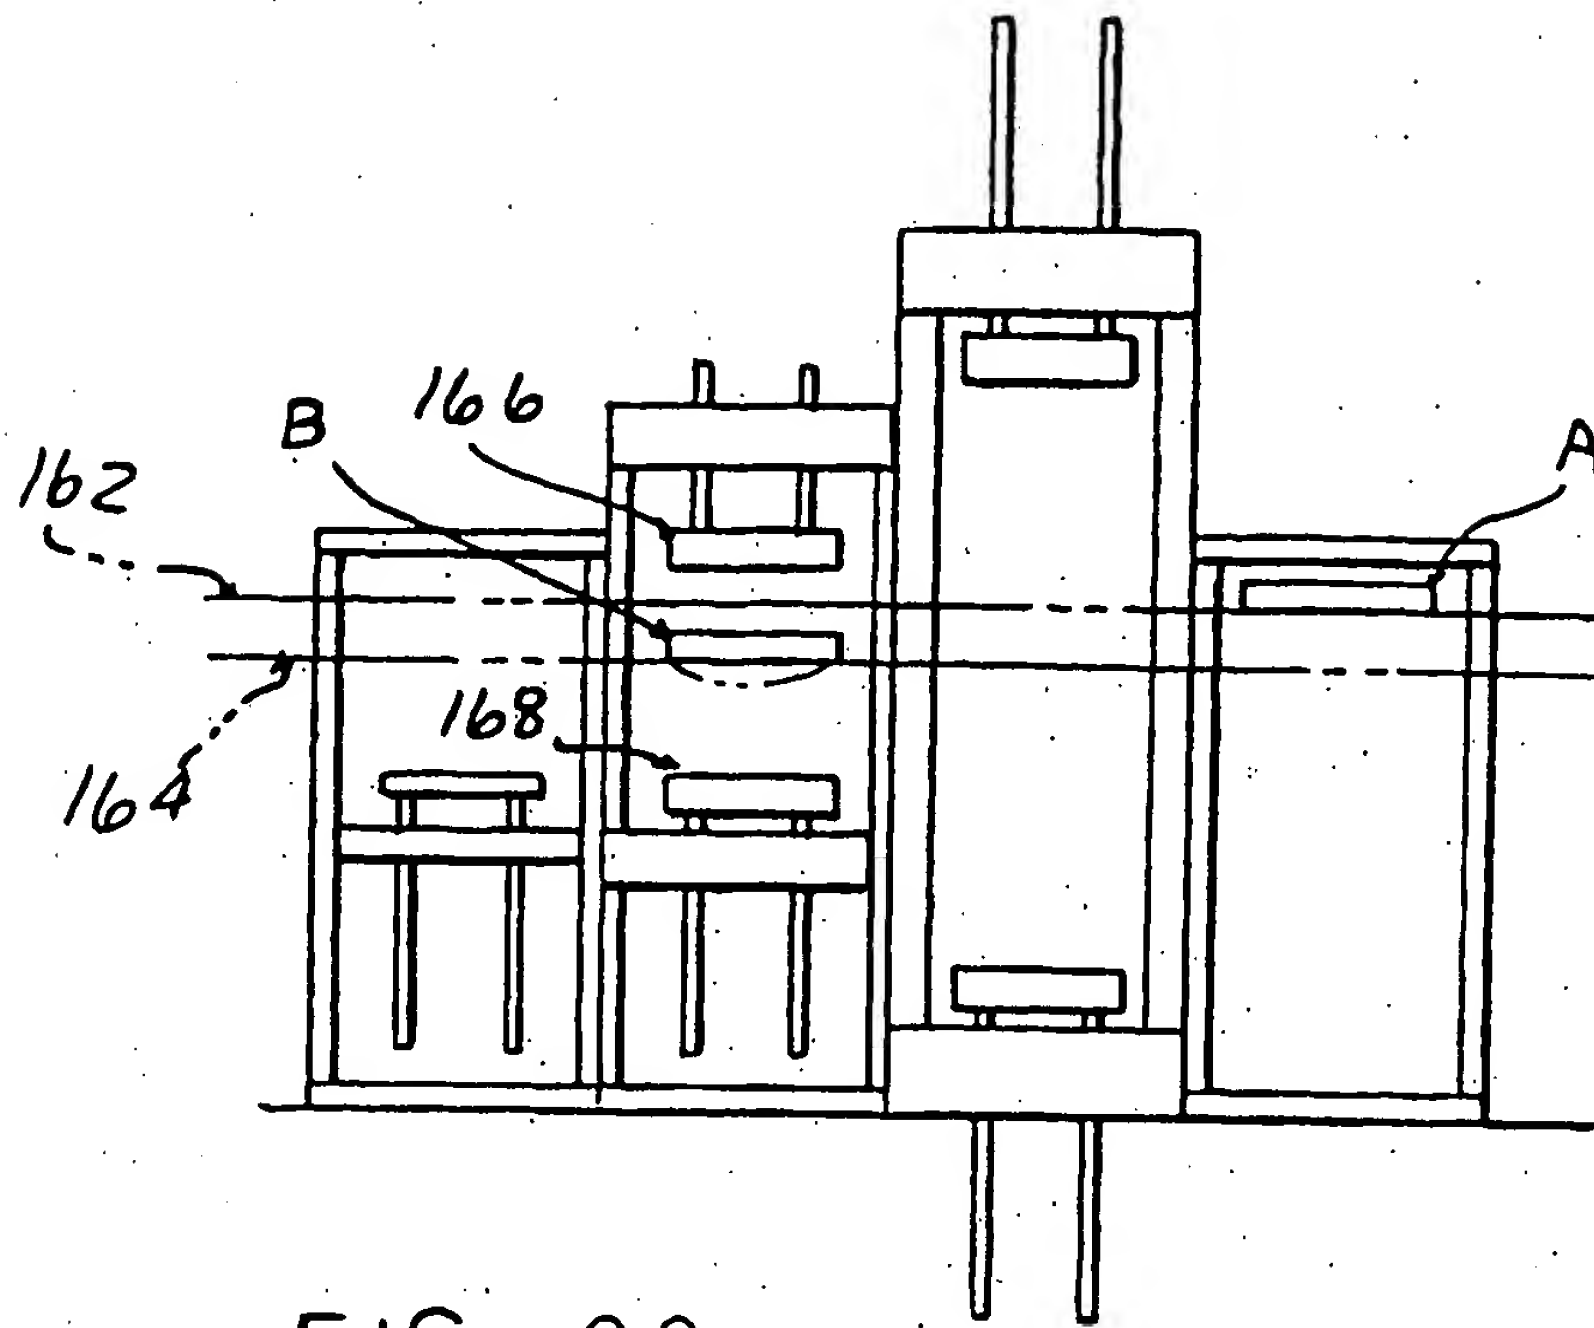


FIG-23

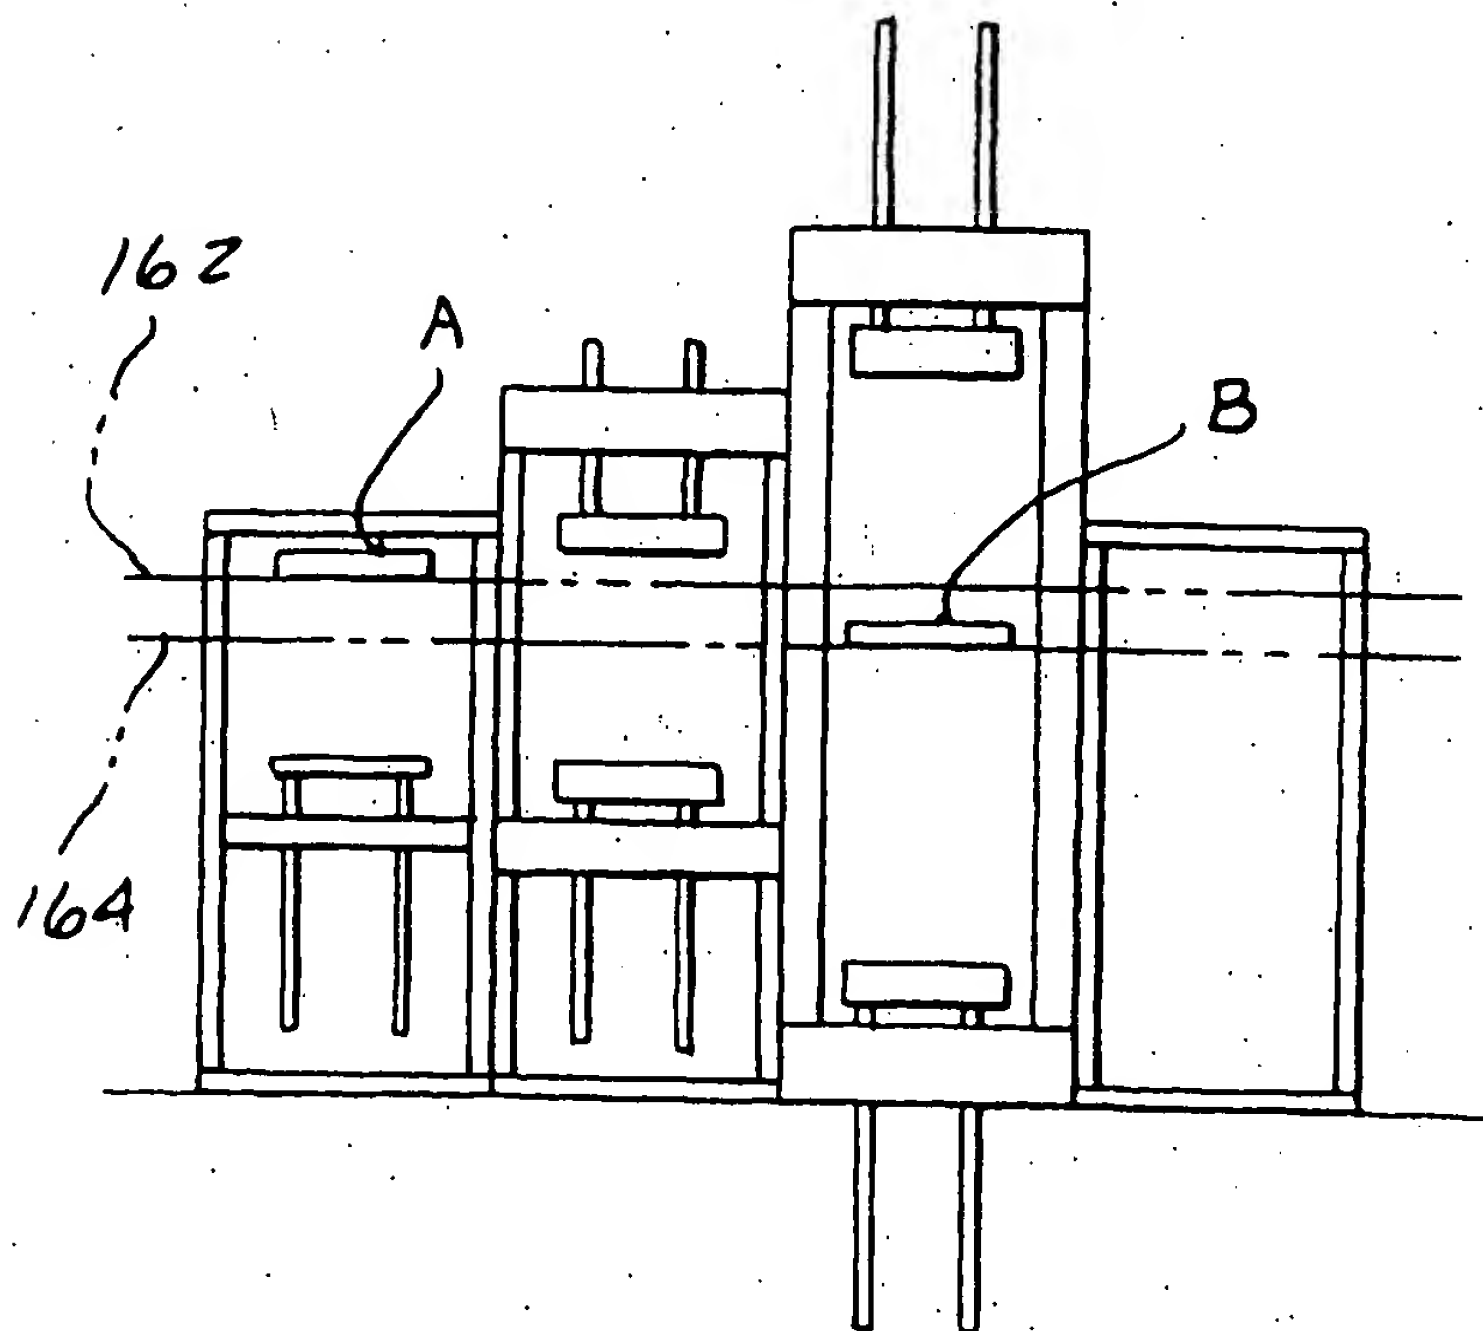


FIG-24